



# HTB18L-B4A5BAD04

SureSense

HYBRID PHOTOELECTRIC SENSORS

**SICK**  
Sensor Intelligence.



Illustration may differ



### Ordering information

| Type             | Part no. |
|------------------|----------|
| HTB18L-B4A5BAD04 | 1079103  |

Other models and accessories → [www.sick.com/SureSense](http://www.sick.com/SureSense)

### Detailed technical data

#### Features

|                                        |                                                            |
|----------------------------------------|------------------------------------------------------------|
| <b>Sensor/ detection principle</b>     | Photoelectric proximity sensor, Background suppression     |
| <b>Dimensions (W x H x D)</b>          | 16.2 mm x 48.5 mm x 31.8 mm                                |
| <b>Housing design (light emission)</b> | Hybrid                                                     |
| <b>Thread diameter (housing)</b>       | M18                                                        |
| <b>Mounting system type</b>            | M18, nose / side (24.1 ... 25.4 mm)                        |
| <b>Housing color</b>                   | Blue                                                       |
| <b>Sensing range max.</b>              | 30 mm ... 300 mm <sup>1)</sup>                             |
| <b>Sensing range</b>                   | 30 mm ... 250 mm <sup>2)</sup>                             |
| <b>Type of light</b>                   | Visible red light                                          |
| <b>Light source</b>                    | Laser <sup>3)</sup>                                        |
| <b>Light spot size (distance)</b>      | 2 mm (120 mm)                                              |
| <b>Wave length</b>                     | 655 nm                                                     |
| <b>Laser class</b>                     | I                                                          |
| <b>Adjustment</b>                      |                                                            |
| Potentiometer, right                   | None                                                       |
| Potentiometer, left                    | None                                                       |
| <b>Special applications</b>            | Detecting small objects                                    |
| <b>Special features</b>                | Signal strength light bar<br>Sensing range pre-set: 100 mm |

<sup>1)</sup> Object with 90 % reflectance (referred to standard white, DIN 5033).

<sup>2)</sup> Object with 6 % reflectance (referred to standard black, DIN 5033).

<sup>3)</sup> Average service life: 50,000 h at T<sub>U</sub> = +25 °C.

## Mechanics/electronics

|                                            |                                                                                                                                                                                              |
|--------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Supply voltage</b>                      | 10 V DC ... 30 V DC                                                                                                                                                                          |
| <b>Ripple</b>                              | $< 5 V_{pp}^{1)}$                                                                                                                                                                            |
| <b>Power consumption</b>                   | 20 mA <sup>2)</sup>                                                                                                                                                                          |
| <b>Switching output</b>                    | PNP<br>NPN                                                                                                                                                                                   |
| <b>Switching mode</b>                      | Light switching                                                                                                                                                                              |
| <b>Switching output detail</b>             |                                                                                                                                                                                              |
| Switching output Q1                        | PNP, Light switching                                                                                                                                                                         |
| Switching output Q2                        | NPN, Light switching                                                                                                                                                                         |
| <b>Output current <math>I_{max}</math></b> | $\leq 100 \text{ mA}$                                                                                                                                                                        |
| <b>Response time</b>                       | $\leq 0.5 \text{ ms}^{3)}$                                                                                                                                                                   |
| <b>Switching frequency</b>                 | 1,000 Hz <sup>4)</sup>                                                                                                                                                                       |
| <b>Connection type</b>                     | Male connector M12, 4-pin                                                                                                                                                                    |
| <b>Circuit protection</b>                  | A <sup>5)</sup><br>B <sup>6)</sup><br>D <sup>7)</sup>                                                                                                                                        |
| <b>Protection class</b>                    | III <sup>8)</sup>                                                                                                                                                                            |
| <b>Weight</b>                              | 18 g                                                                                                                                                                                         |
| <b>Housing material</b>                    | Plastic, VISTAL®                                                                                                                                                                             |
| <b>Optics material</b>                     | Plastic, PMMA                                                                                                                                                                                |
| <b>Enclosure rating</b>                    | IP67<br>IP69K                                                                                                                                                                                |
| <b>Items supplied</b>                      | Mounting nut (1x), M18, plastic, black, flat                                                                                                                                                 |
| <b>EMC</b>                                 | EN 60947-5-2 (The sensor complies with the Radio Safety Requirements (EMC) for the industrial sector (Radio Safety Class A). It may cause radio interference if used in a residential area.) |
| <b>Ambient operating temperature</b>       | $-30 \text{ °C} \dots +55 \text{ °C}^{9)}$                                                                                                                                                   |
| <b>Ambient storage temperature</b>         | $-40 \text{ °C} \dots +70 \text{ °C}$                                                                                                                                                        |
| <b>UL File No.</b>                         | E189383                                                                                                                                                                                      |

<sup>1)</sup> May not exceed or fall below  $U_V$  tolerances.

<sup>2)</sup> Without signal strength light bar and load.

<sup>3)</sup> Signal transit time with resistive load.

<sup>4)</sup> With light/dark ratio 1:1.

<sup>5)</sup> A =  $V_S$  connections reverse-polarity protected.

<sup>6)</sup> B = inputs and output reverse-polarity protected.

<sup>7)</sup> D = outputs overcurrent and short-circuit protected.

<sup>8)</sup> Reference voltage: 50 V DC.

<sup>9)</sup> Below  $T_a = -10 \text{ °C}$ , sensor must be turned on at  $T_a > -10 \text{ °C}$ . Sensor cannot be turned on below  $T_a = -10 \text{ °C}$ .

## Safety-related parameters

|                         |             |
|-------------------------|-------------|
| <b>MTTF<sub>D</sub></b> | 282.7 years |
| <b>DC<sub>avg</sub></b> | 0%          |

## Classifications


|                     |          |
|---------------------|----------|
| <b>ECI@ss 5.0</b>   | 27270904 |
| <b>ECI@ss 5.1.4</b> | 27270904 |

|                       |          |
|-----------------------|----------|
| <b>ECl@ss 6.0</b>     | 27270904 |
| <b>ECl@ss 6.2</b>     | 27270904 |
| <b>ECl@ss 7.0</b>     | 27270904 |
| <b>ECl@ss 8.0</b>     | 27270904 |
| <b>ECl@ss 8.1</b>     | 27270904 |
| <b>ECl@ss 9.0</b>     | 27270904 |
| <b>ETIM 5.0</b>       | EC002719 |
| <b>ETIM 6.0</b>       | EC002719 |
| <b>UNSPSC 16.0901</b> | 39121528 |

### Connection/pin out

|                        |                           |
|------------------------|---------------------------|
| <b>Connection type</b> | Male connector M12, 4-pin |
| <b>Pin out</b>         |                           |
| BN 1                   | + (L+)                    |
| WH 2                   | Q <sub>2</sub>            |
| BU 3                   | - (M)                     |
| BK 4                   | Q <sub>1</sub>            |

### Dimensional drawing (Dimensions in mm (inch))

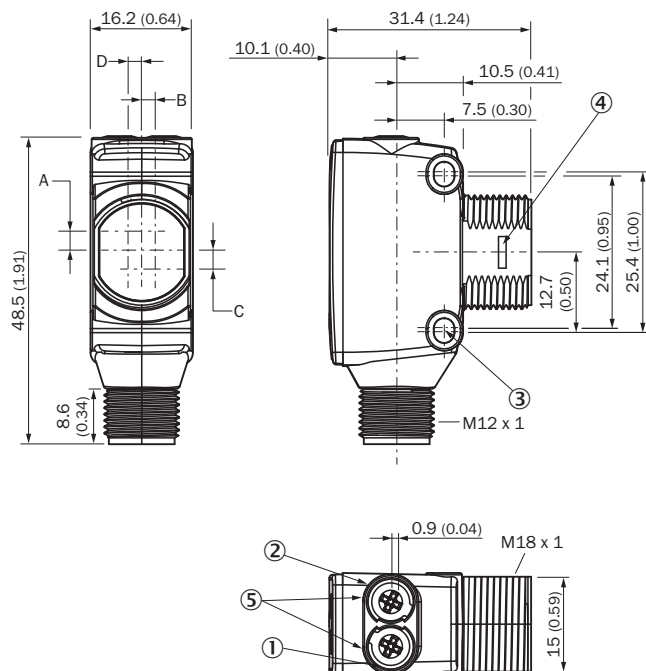

- ① LED indicator yellow: Status of received light beam
- ② LED indicator green: power on
- ③ M3 mounting hole
- ④ Snap Connection for flush ring (sold separately)
- ⑤ Potentiometer (if selected) or LED Indicators

| Dimensions in mm (inch) | Receiver     |            | Sender     |            |
|-------------------------|--------------|------------|------------|------------|
|                         | A            | B          | C          | D          |
| <b>HTB18 / HTF18</b>    | - 1.1 (0.04) | 1.1 (0.04) | 4.7 (0.19) | 0.6 (0.02) |


| Dimensions in mm (inch)             | Receiver  |           | Sender     |           |
|-------------------------------------|-----------|-----------|------------|-----------|
| HTE18 / HL18 / HSE18                | 2.5 (0.1) | 0.0 (0.0) | 4.0 (0.16) | 0.0 (0.0) |
| HTB18L / HTF18L /<br>HL18L / HSE18L | 2.5 (0.1) | 0.0 (0.0) | 3.5 (0.14) | 0.0 (0.0) |

Connection type

See table: **Connection/pin out**




Adjustments possible




- ① LED indicator yellow: Status of received light beam
- ② LED indicator green: power on
- ③ Signal strength light bar


Characteristic curve

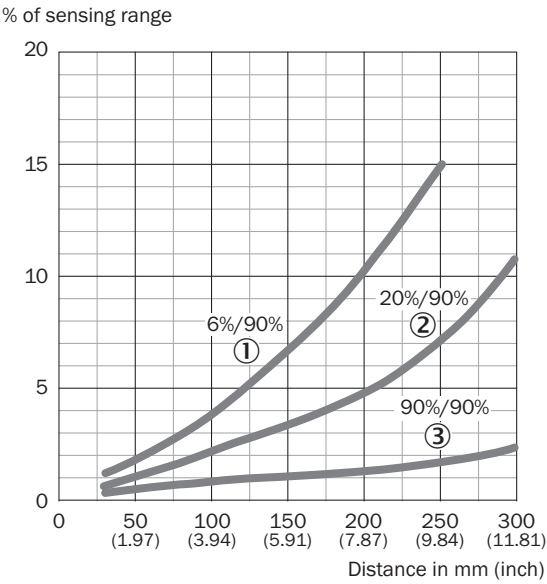


Light spot size

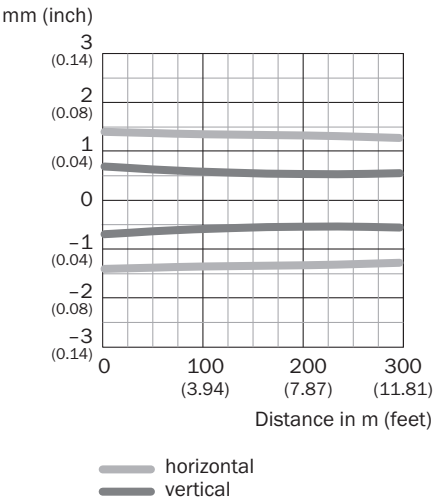

Sensing range diagram

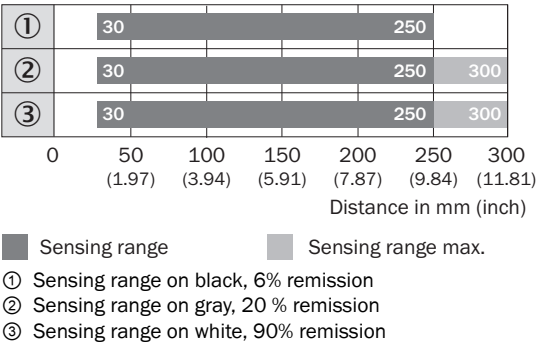

Functions

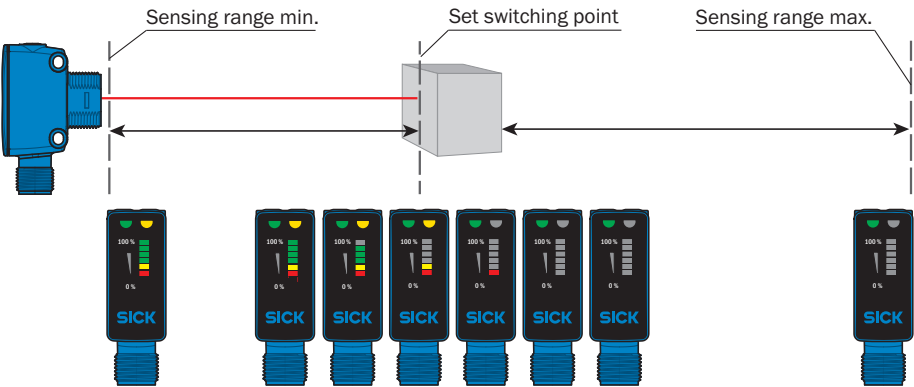

Recommended accessories

Other models and accessories → [www.sick.com/SureSense](http://www.sick.com/SureSense)

|                                                                                     | Brief description                                                                                                                     | Type               | Part no. |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|--------------------|----------|
| Plug connectors and cables                                                          |                                                                                                                                       |                    |          |
|  | Head A: female connector, M12, 4-pin, straight, A-coded<br>Head B: Flying leads<br>Cable: Sensor/actuator cable, PVC, unshielded, 5 m | YF2A14-050VB3XLEAX | 2096235  |
|  | Head A: male connector, M12, 4-pin, straight<br>Head B: -<br>Cable: unshielded                                                        | STE-1204-G         | 6009932  |

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

**For us, that is “Sensor Intelligence.”**

## WORLDWIDE PRESENCE:

Contacts and other locations –[www.sick.com](http://www.sick.com)