


Asset Tracking a Complete Solution from ST



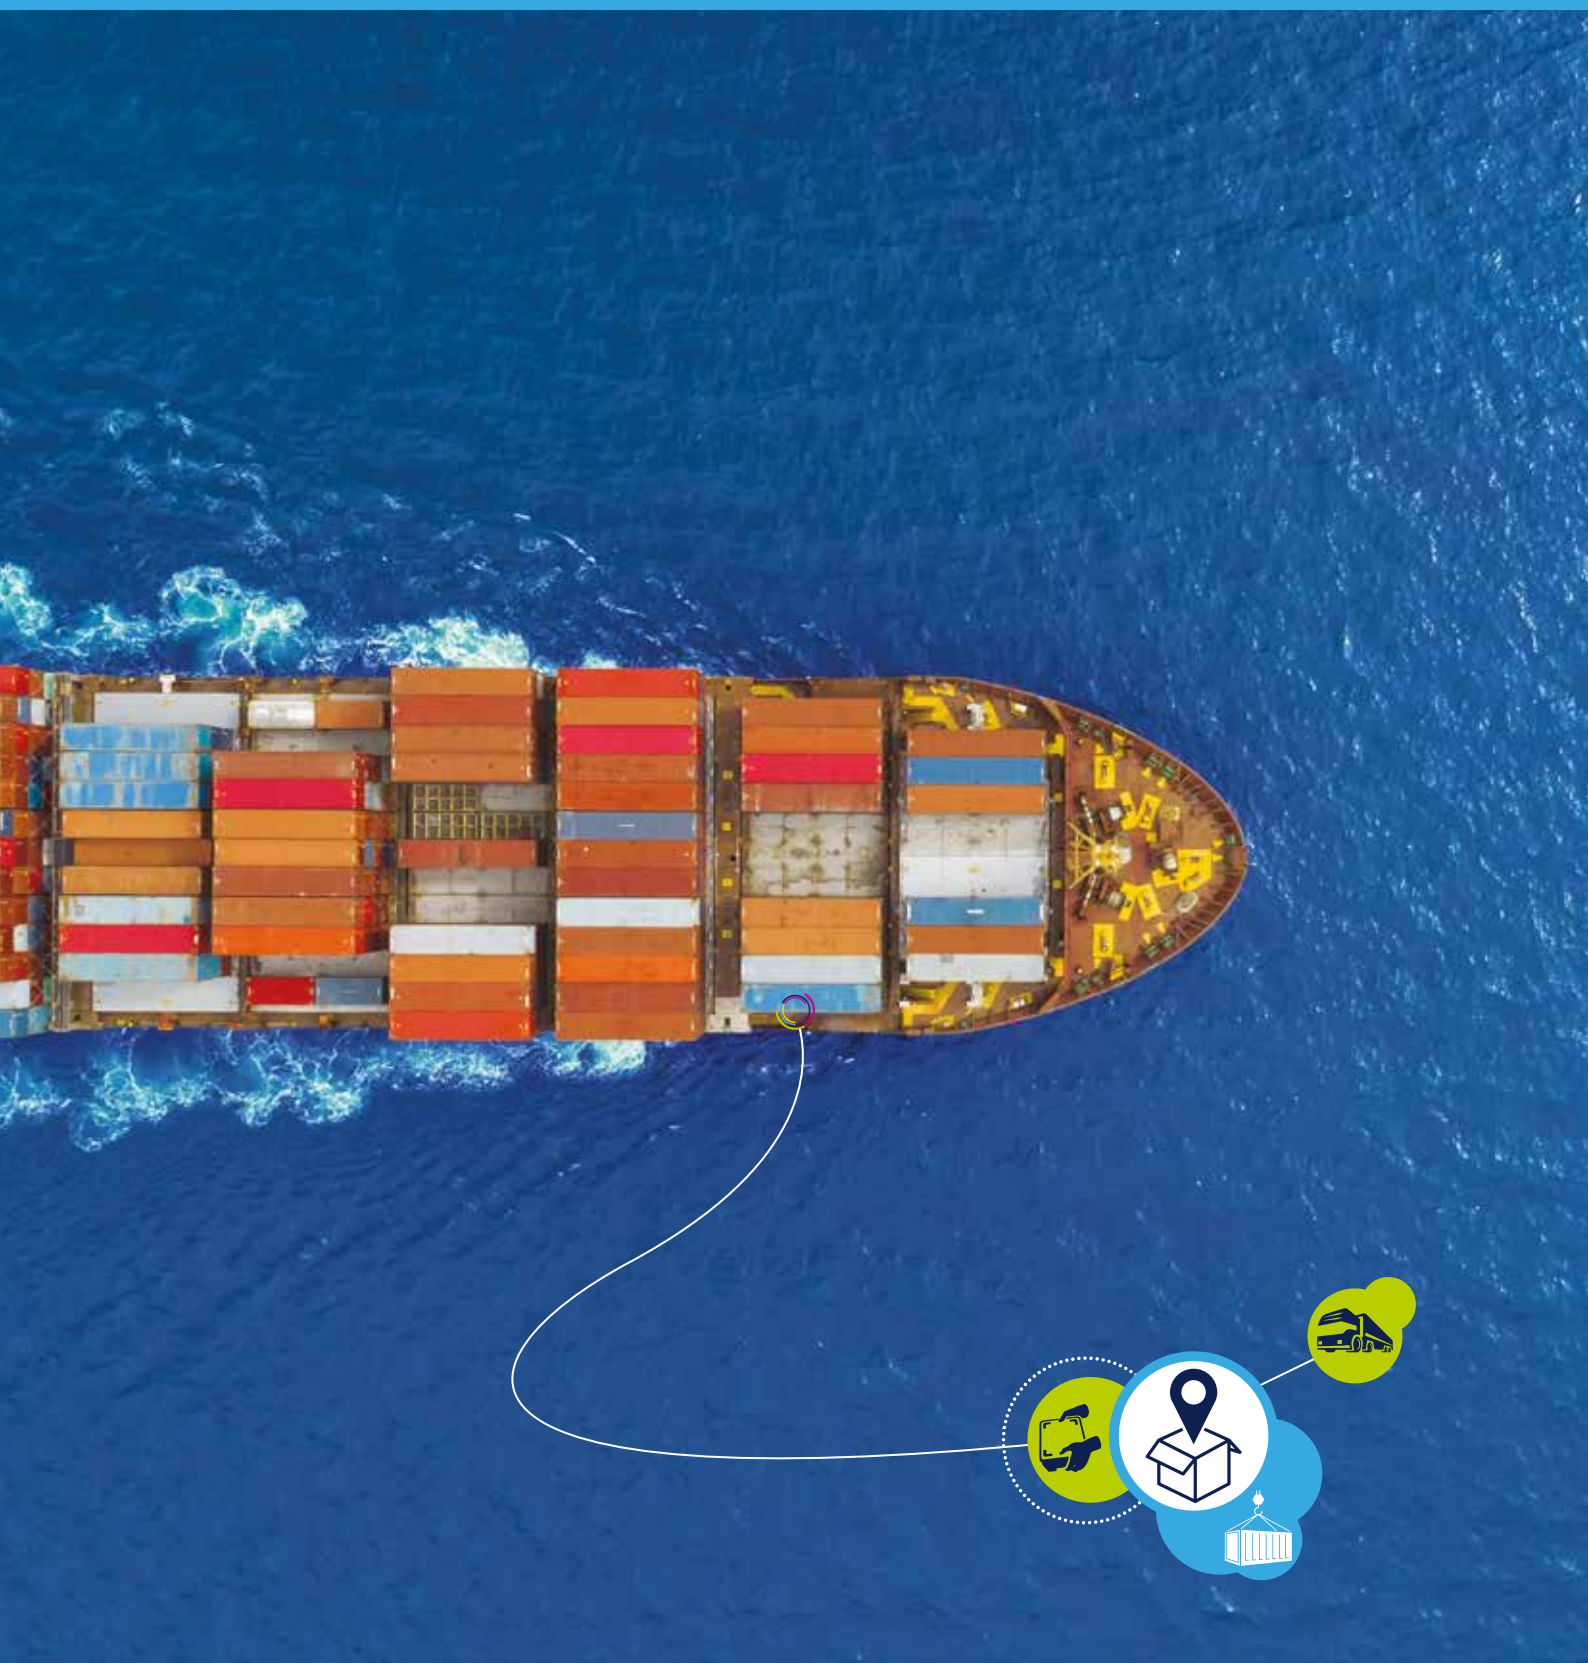

Introduction

In global manufacturing and commerce, raw materials, components and final goods travel long distances before arriving at the final destination. More than often, the value – direct or indirect – of any particular item warrants the cost associated with monitoring its condition – like detecting shocks or recording temperatures in a cold-chain for food storage and transportation – and track it all along the logistics chain.

Tracking relies mostly GNSS location technologies or wireless communications triangulation positioning, while the continuous monitoring of storage conditions is based on an array of sensors depending on the physical variables involved.


APPLICATIONS AND SEGMENTATION

Outdoor Real-Time Monitoring		Containers		Livestock monitoring		e-bike		Fleet management		Pet tracking
Industrial Logistic		Pallets		Racks		Luggage		Smart parcels		
Good Guarantee		Cold chain		Food		Medical				
Disposable		Letters		Packages		Parcels				

ST 360° PORTFOLIO DELIVERS 100% FLEXIBILITY

Sensing & Actuating	Signal Conditioning & Protection	Processing	Connectivity	Power & Energy Management
Accelerometers Vibration Orientation Free Fall detection Temperature & Humidity Shipping Environment Goods Status Pressure Take off and landing detection Ranging sensor Objects presence detection and counting	Analog Including Signal Conditioning, Protections, ...	STM32 Computation by STM32 Family	BLE Bluetooth Low Energy Connectivity to gateway/tablet Sub-1GHz Long Range Connectivity to base stations/gateway Sigfox/LoRa NFC Short Connectivity to handheld devices Positioning Localization	Power Management DC/DC, LDO


TYPICAL ASSET TRACKING APPLICATION DIAGRAM

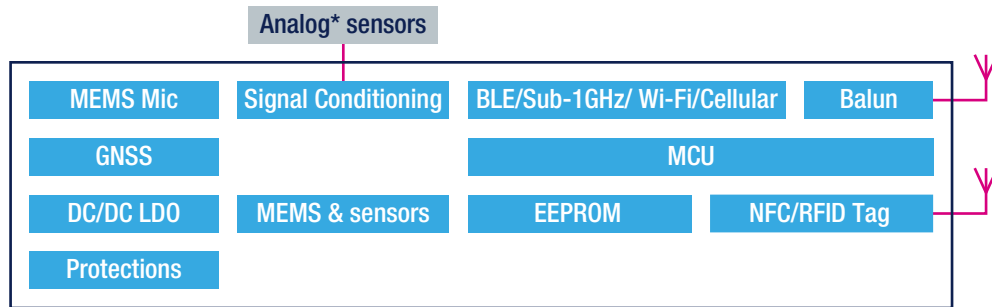




ST offering a wide extensive range of environmental sensors(temperature, humidity and pressure), inertial sensors (accelerometers, gyroscopes and magnetometers), proximity sensors. Besides ST provides a huge product portfolio for low-power wireless connectivity such as Bluetooth Low Energy and NFC as short range solution, UHF Reader, and for Low Power Wide Area Network (LPWAN) as LoRa and Sigfox, and easy to use solution for GNSS positioning receiver, that in addition to a wide range of motion, environmental and proximity sensors, low-power microcontrollers, EEPROM memories and high efficiency power management ICs, allow easily to build ultra low-power tracking solutions for pallets and containers.

PALLETS AND CONTAINER TRACKING END-NODE - APPLICATION EXAMPLES

Tracking Bluetooth Low energy and SigFox

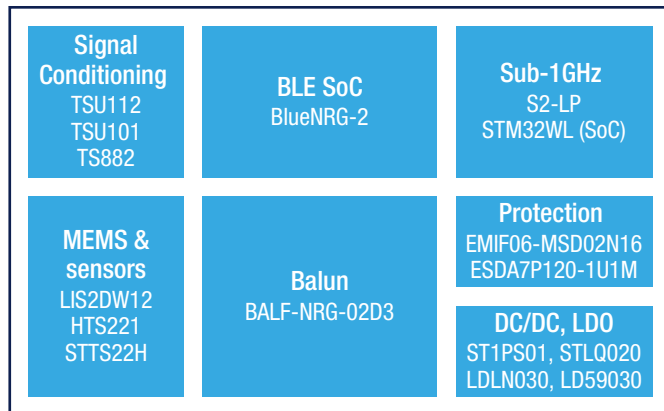


Tracking LTE

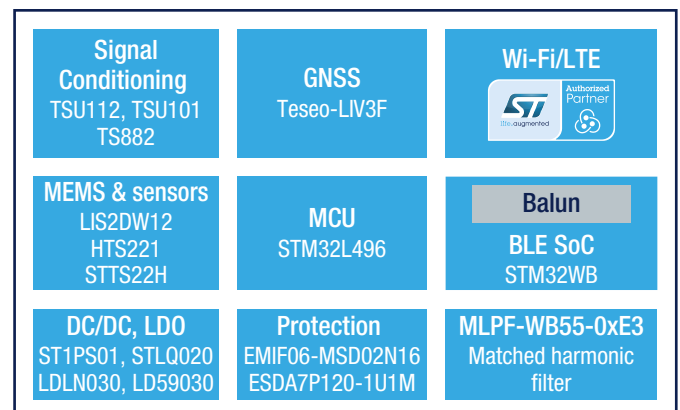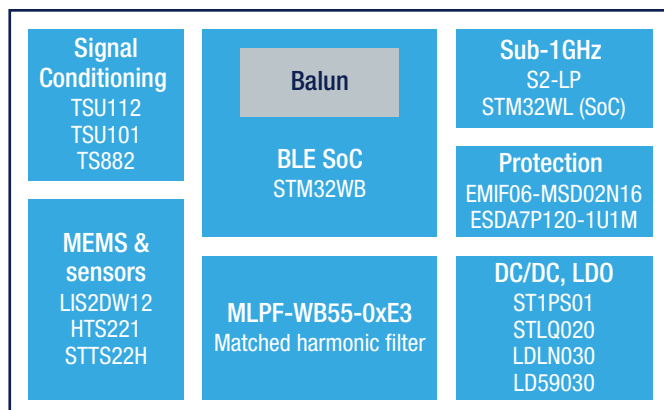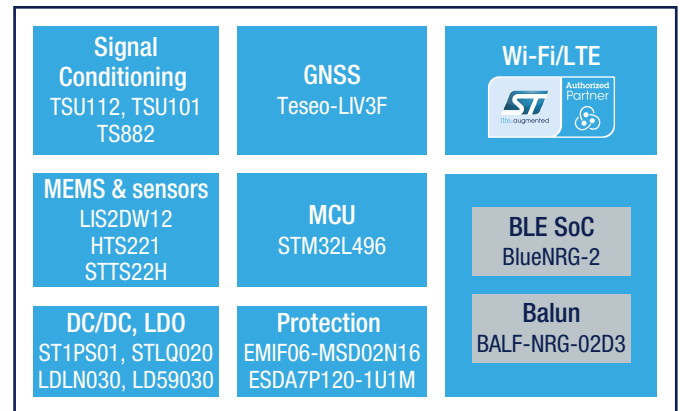

Note: * Also parts not available in ST portfolio
BLE = Bluetooth Low Energy




To support the design of ultra-low-power tracking and monitoring solutions, ST offers an extensive range of temperature, humidity and pressure sensors, inertial measurement units (accelerometers, gyroscopes and magnetometers), proximity sensors.



















 FlightSense™ Ranging sensor	
VL6180X	Proximity sensor and ALS
VL53L0X	Ranging sensor
VL53L1X	Long distance ranging sensor

Note: * Coming soon

MICROCONTROLLERS & MICROPROCESSORS




The wide range of STM32 microcontrollers are based on an industry-standard core and come with a large choice of tools and software, making this product family ideal for both small projects or entire system platforms.

MPUs							
High performance MCUs					 		
Mainstream MCUs	 			 			
Ultra-low power MCUs				 			
Wireless MCUs	MCU series for asset tracking applications				 		
Arm® core	Cortex®-M0/M0+	Cortex®-M3	Cortex®-M33	Cortex®-M4	Cortex®-M7	Dual Cortex®-M7 & Cortex®-M4	Dual Cortex®-A7 & Cortex®-M4

- With Cortex[®]-M0+ radio co-processor

WIRELESS CONNECTIVITY SOLUTIONS


ST's portfolio includes a variety of transceivers, network processors ICs and fully certified modules that support major technologies currently available for wireless connectivity including sub-1 GHz long-range networks (6LoWPan, WMBUS, SigFox and LoRaWAN), Bluetooth-Smart®, 802.15.4 ZigBee and OpenThread.


 NFC & RFID	
ST25TV	NFC/RFID tags
ST25DV	Dynamic NFC/RFID tags
ST25R	NFC Readers
ST25RU3993	NFC Readers for UHF

 Sub-1 GHz	
S2-LP	Sub-1 GHz Transceiver Sigfox compatibility
BALF-SPI2-01D3 BALF-SPI2-02D3	Balun for S2-LP
STM32WL	STM32 Sub-GHz SoC


 Positioning	
TESEO-LIV3	GNSS Module
 GNSS	



 Bluetooth Low Energy	
BlueNRG-2	Highly energy-efficient Bluetooth 5.0 Wireless SoC
BALF-NRG-02D3	Balun & Filter for BlueNRG
BlueNRG-M2	Bluetooth 5.0 Modules
STM32WB	Multi-protocol (BLE 5.0/802.15.4) Wireless SoC
MLPF-WB55-0xE3	STM32WB Filter

 WPAN	
STM32WB	Multi-protocol (BLE 5.0 / 802.15.4) Wireless SOC (balun integrated)
BAL-UWB-x	Balun for UWB



 Cellular	
Cellular connectivity In collaboration with several partners	







Complementary Products

POWER MANAGEMENT

ST is a leading supplier in power management and mixed-signal ICs for mobile applications, offering a wide range of products from simple power management ICs up to highly-integrated devices that mix power management blocks with advanced analog and digital functionalities.

 DC/DC converters		 Voltage regulators	
ST1PS01/02	Synchronous converter, Output voltage flexibility, 400 mA output current, Nano-quiescent current (500 nA) for extended sensors battery life	STLQ020	200 mA ultra-low quiescent current LDO
		LDLN030	Low Iq, ultra low noise 300 mA LDO with power good
		LDLN025	Low Iq, ultra low noise 250 mA LDO
		LD59030	Low Iq, ultra low drop 300 mA LDO

SIGNAL CONDITIONING

STMicroelectronics offers a wide analog portfolio including high-performance amplifiers and comparators dedicated to the challenging industrial, automotive and consumer markets. The main features of our growing portfolio are low power, high precision and tiny packages. The range of products allows easy and fast integration of analog products. For more information visit www.st.com/opamps

6



TSZ12 Series Zero Drift CMOS Amplifier	<ul style="list-style-type: none"> • Very low offset 5 μV max • Very low drift in Temperature 30 nV/°C
TSZ18 Series Zero Drift & Speed Amplifier	<ul style="list-style-type: none"> • Very low offset 25 μV max • Very low drift in Temperature 0.1 μV/°C • Excellent Speed/power ratio 3 MHz/1 mA
TSU11 Series Nano-power Amplifiers Zero Drift	<ul style="list-style-type: none"> • 900 nA current Consumption • Only 150 μV max input offset Voltage • Operating from 1.5 V
TSU10 Series Nano-power Amplifiers	<ul style="list-style-type: none"> • 580 nA current consumption • Operating from 1.5 V
TS88 Series Nano-power Comparator	<ul style="list-style-type: none"> • 200 nA current Consumption • Operating from 0.9 V • Push Pull & Open Drain

PROTECTION

ST's large portfolio of protection devices and ICs have passed all certifications, meeting or exceeding international protection standards for electrical hazards on electronics boards found in the demanding, industrial market. Standard and advanced innovative packages (flow-through μ DFN, WLCSP and PowerQFN) keep board space to a minimum, helping improve layout options. For more info refer to <https://www.st.com/en/protection-devices.html>

Protection	
EMIF06-MSD02N16	SD card protection
ECMF02-4CMX8	USB DATALINE
ESDA7P120-1U1M	DC-DC protection
DSILC6-4P6	ESD protection for NFC Tag
EMIF03-SIM02M8	SIM card ESD protection and filter



Design support

ST provides different hardware and software solutions to help designers in their job. Starting from the Product Evaluation Boards, that can be used to perform a comprehensive evaluation of ST's products, arriving to the **Solution Evaluation Boards** tailored to exploit one or more features of the application. Between these two families of evaluation boards, ST offers a fast and modular prototyping system, namely **STM32 Open Development Environment (ODE)**, which permits to combine STM32 microcontroller with a broad range of expandable boards to reproduce the desired set of functions for sensing, connectivity, power, audio, motor control and more.

The ST Software Development Tools complement the ST hardware ecosystem adding programming tools, firmware libraries, middleware and stacks to reduce the design complexity.

KEY PLATFORMS



NFC & RFID



Smart and flexible NFC Tracker

Solution Board

STEVAL-SMARTAG1

Firmware Packs

FP-SNS-SMARTAG1
ST NFC Sensor mobile app



STM32 ODE Approach

NUCLEO-L053R8
X-NUCLEO-NFC04A1
X-NUCLEO-IKS01A2

Target Applications



Bluetooth Low Energy



BlueNRG-Tile - Bluetooth LE enabled sensor node

Solution Board

STEVAL-BCN002V1B

Firmware Packs

STSW-BLUETILE-DK
STBLESensor

Target Applications



Bluetooth Low Energy



SensorTile.box wireless multi sensor ready-to-go IoT Node

Solution Board

STEVAL-MKSBOX1V1

Firmware Packs

FP-SNS-STBOX1

Target Applications



Sub
1GHz

Sub-1 GHz



Sigfox™ Tracker

Firmware Packs

FR-ATR-SIGFOX1

STM32 ODE Approach

NUCLEO-L053R8/L476RG
X-NUCLEO-S2868A2/915A1
X-NUCLEO-IKS01A2/3

Target Applications



Sub
1GHz

Sub-1 GHz



IoT LoRa® Tracker

Solution Board

STEVAL-STRKT01

Firmware Packs

FP-ATR-LORA1

STM32 ODE Approach

B-L072Z-LRWAN1
X-NUCLEO-GNSS1A1
X-NUCLEO-IKS01A2

Target Applications



Cellular & GNSS



TOMTOM™ Tracker

Firmware Packs

FP-ATR-TOMTOM

STM32 ODE Approach

NUCLEO-F401RE
P-L496G-CELL01 2G/3G
P-L496G-CELL02 LTE

Target Applications



© STMicroelectronics - January 2020 - Printed in United Kingdom - All rights reserved
The STMicroelectronics corporate logo is a registered trademark of the STMicroelectronics group of companies
All other names are the property of their respective owners

