

200mA, 30V Schottky Barrier Diode

FEATURES

- Fast switching speed
- Low forward voltage drop
- Surface mount device type
- Moisture sensitivity level: level 1, per J-STD-020
- RoHS Compliant
- Halogen-free according to IEC 61249-2-21


APPLICATIONS

- Voltage clamping
- Reverse polarity protection
- High speed switching


MECHANICAL DATA

- Case: SOT-363
- Molding compound meets UL 94 V-0 flammability rating
- Terminal: Matte tin plated leads, solderable per J-STD-002
- Meet JESD 201 class 1A whisker test
- Weight: 6 mg (approximately)


KEY PARAMETERS		
PARAMETER	VALUE	UNIT
I_F	200	mA
V_{RRM}	30	V
I_{FSM}	600	mA
V_F at $I_F=100mA$	1	V
$T_{J\ MAX}$	125	°C
Package	SOT-363	

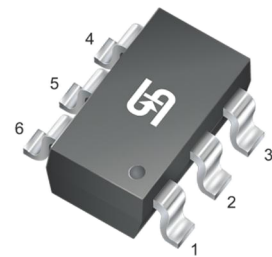


PIN CONFIGURATION




BAT54T




BAT54AD



BAT54CD



BAT54SD



BAT54BR

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise noted)							
PARAMETER	SYMBOL	BAT54 T	BAT54 AD	BAT54 CD	BAT54 SD	BAT54 BR	UNIT
Marking code on the device		KLA	KL6	KL7	KL8	KLB	
Power dissipation	P_D	200					mW
Repetitive peak reverse voltage	V_{RRM}	30					V
Repetitive peak forward current	I_{FRM}	300					mA
Forward current	I_F	200					mA
Non-Repetitive peak forward surge current @ $t < 1.0s$	I_{FSM}	600					mA
Junction temperature range	T_J	-55 to +125					°C
Storage temperature range	T_{STG}	-55 to +125					°C

THERMAL PERFORMANCE

PARAMETER	SYMBOL	TYP	UNIT
Junction-to-ambient thermal resistance	$R_{\theta JA}$	625	°C/W

ELECTRICAL SPECIFICATIONS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

PARAMETER	CONDITIONS	SYMBOL	MIN	MAX	UNIT
Forward voltage per diode ⁽¹⁾	$I_F = 1\text{mA}, T_J = 25^\circ\text{C}$	V_F	-	0.32	V
	$I_F = 10\text{mA}, T_J = 25^\circ\text{C}$			0.40	
	$I_F = 30\text{mA}, T_J = 25^\circ\text{C}$			0.50	
	$I_F = 100\text{mA}, T_J = 25^\circ\text{C}$			1.00	
Reverse voltage	$I_R = 100\ \mu\text{A}, T_J = 25^\circ\text{C}$	V_R	30	-	V
Reverse current @ rated V_R per diode ⁽²⁾	$V_R = 25\text{V}, T_J = 25^\circ\text{C}$	I_R	-	2	μA
Total capacitance	1 MHz, $V_R = 1\text{V}$	C_T	-	10	pF
Reverse recovery time	$I_F = I_R = 10\text{mA}, R_L = 100\Omega, I_{RR} = 1\text{mA}$	t_{rr}	-	5	ns

Notes:

1. Pulse test with $PW = 0.3\text{ ms}$
2. Pulse test with $PW = 30\text{ ms}$

ORDERING INFORMATION

ORDERING CODE	PACKAGE	PACKING
BAT54T RFG	SOT-363	3K / 7" Reel
BAT54AD RFG	SOT-363	3K / 7" Reel
BAT5CD RFG	SOT-363	3K / 7" Reel
BAT54SD RFG	SOT-363	3K / 7" Reel
BAT54BR RFG	SOT-363	3K / 7" Reel
BAT54T RF	SOT-363	3K / 7" Reel
BAT54AD RF	SOT-363	3K / 7" Reel
BAT5CD RF	SOT-363	3K / 7" Reel
BAT54SD RF	SOT-363	3K / 7" Reel
BAT54BR RF	SOT-363	3K / 7" Reel

Note: "G" means green compound (halogen free)

CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig.1 Typical Forward Characteristics

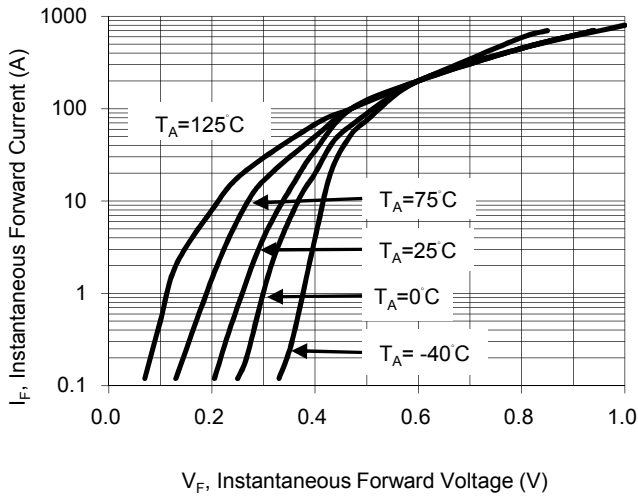


Fig. 2 Typical Reverse Characteristics

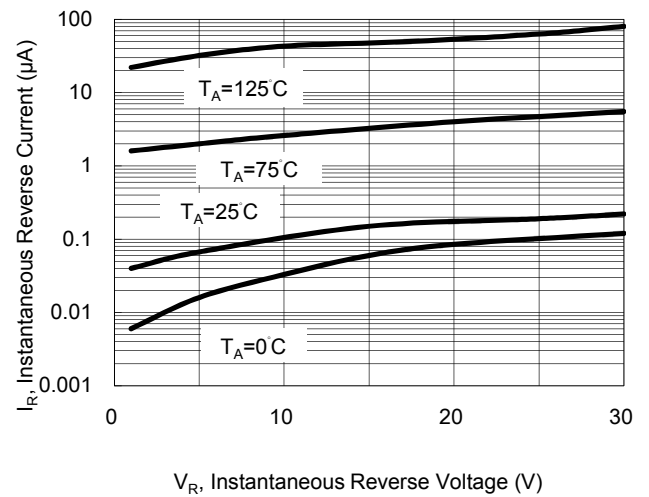


Fig.3 Capacitance Between Terminals Characteristics



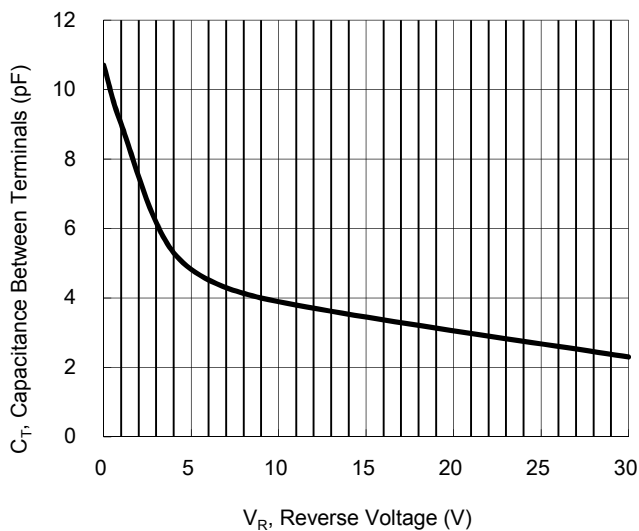


Fig.4 Power Derating Curve

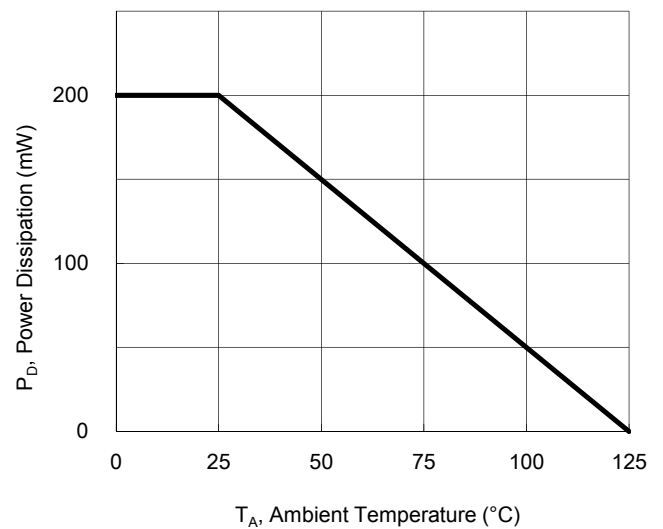


PACKAGE OUTLINE DIMENSION

SOT-363

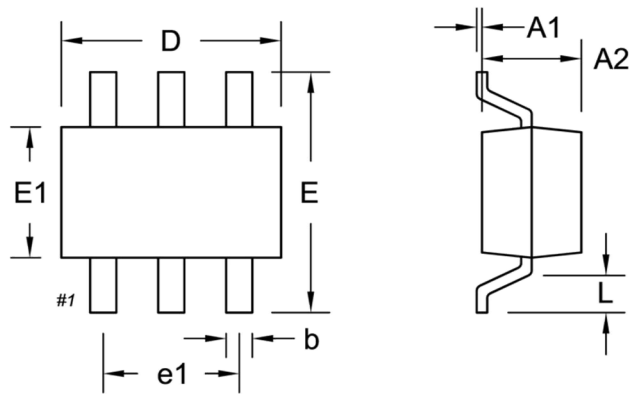

DIM.	Unit (mm)		Unit (inch)	
	Min.	Max.	Min.	Max.
A1	0.00	0.10	0.000	0.004
A2	0.85	1.05	0.033	0.041
b	0.15	0.35	0.006	0.014
D	2.00	2.20	0.079	0.087
E	2.15	2.45	0.085	0.096
E1	1.15	1.35	0.045	0.053
e1	1.20	1.40	0.047	0.055
L	0.25	0.46	0.010	0.018

SUGGEST PAD LAYOUT

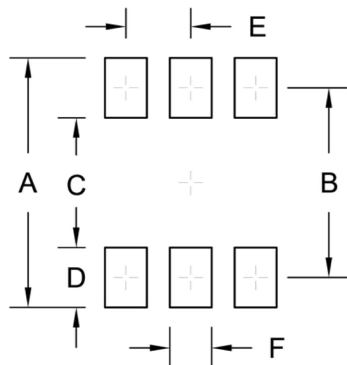

Symbol	Unit (mm)	Unit (inch)
A	2.50	0.098
B	1.90	0.075
C	1.30	0.051
D	0.60	0.024
E	0.65	0.026
F	0.42	0.017

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Purchasers are solely responsible for the choice, selection, and use of TSC products and TSC assumes no liability for application assistance or the design of Purchasers' products.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.