


HMB1201G01P Product Details

Share
Print

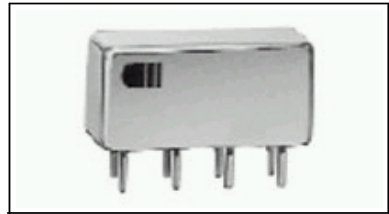

HMB1201G01P
(1 - 1617038 - 9)

Military/Aerospace High Performance Relays

Not EU RoHS or ELV Compliant

Product Highlights:

- ? HMB Half - Size Relay Series
- ? Input Voltage = 12 VDC
- ? Contact Arrangement = 2 Form C, DPDT, 2 C/O
- ? Contact - Rated Current = 2 A
- ? Non Polarized, Monostable Coil - Magnetic System

View all Features

Quick Links

- ? [Check Pricing & Availability](#)
- ? [Search for Tooling](#)
- ? [Product Feature Selector](#)
- ? [Contact Us About This Product](#)

TE Internal Number: 1 - 1617038 - 9

Active

Add to My Part List



Request Sample



Find Similar Products



Buy Product

Documentation & Additional Information	
Product Drawings: <ul style="list-style-type: none"> ? None Available Catalog Pages/Data Sheets: <ul style="list-style-type: none"> ? RELAY (PDF, English) Product Specifications: <ul style="list-style-type: none"> ? None Available Application Specifications: <ul style="list-style-type: none"> ? None Available Instruction Sheets: <ul style="list-style-type: none"> ? None Available CAD Files: <ul style="list-style-type: none"> ? None Available 	Additional Information: <ul style="list-style-type: none"> ? Product Line Information Related Products: <ul style="list-style-type: none"> ? Tooling
List all Documents	

Product Features (Please use the Product Drawing for all design activity)	
Product Type Features: <ul style="list-style-type: none"> ? Series = HMB Half - Size Relay ? Termination Type = PC Pins Electrical Characteristics: <ul style="list-style-type: none"> ? Input Voltage (VDC) = 12 ? Contact - Rated Current (A) = 2 ? Coil Polarity Protection Diode = Without ? Transistor Driver = Without ? Coil Resistance (?) = 160 ? MOSFET Driver = Without ? Coil Power Measurement = Milliwatts ? Coil - Rated Power (mW) = 900 ? Actuating System = DC ? Shock = 100G's, 6ms ? Vibration = 30G's, 10 to 3000Hz Contact Features: <ul style="list-style-type: none"> ? Mounting Options = PC Board ? Enclosure Type = Hermetically Sealed 	Configuration Features: <ul style="list-style-type: none"> ? Contact Arrangement = 2 Form C, DPDT, 2 C/O ? Coil - Magnetic System = Non Polarized, Monostable ? Coil Suppression Diode = Without Industry Standards: <ul style="list-style-type: none"> ? Government/Industry Qualification = Yes ? Government/Industry Part Number = M39016/22 -016P ? RoHS/ELV Compliance = Not ELV/RoHS compliant ? Lead Free Solder Processes = Not suitable for lead free processing ? Approved Standards = M39016 Qualified, P Level Conditions for Usage: <ul style="list-style-type: none"> ? Temperature Range (°C) = -65 - +125 Other: <ul style="list-style-type: none"> ? Brand = CII

Corporate Information

Who We Are

Investors

News Room

Supplier Portal

Careers

Quick Links

Check Distributor Inventory

Cross Reference

Find Documents & Drawings

Product Compliance Support Center

Site Map

Customer Support

Email or Chat With Us

Find a Phone Number

Search Knowledge Base

Manage your Account

Keep Me Informed

Receive TE News, Events & Technology Updates

Enter your email address

