


3SBC2096A2
Product Details

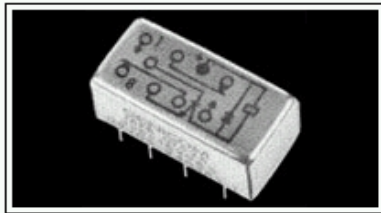

3SBC2096A2
(3-1617073-8)

TE Internal Number: 3-1617073-8


Active

Military/Aerospace High Performance Relays

Not EU RoHS or ELV Compliant

Product Highlights:

- 3SBC 1/5-Size Relay Series
 - Input Voltage = 26.5 VDC
 - Contact Arrangement = 2 Form C, DPDT, 2 C/O
 - Contact Current Rating = 2 A
 - Non Polarized, Monostable Coil Magnetic System

[View all Features](#)

Quick Links

- Check Pricing & Availability
 - Search for Tooling
 - Product Feature Selector
 - Contact Us About This Product

Documentation & Additional Information

Product Drawings:

- None Available

Catalog Pages/Data Sheets:

- [RELAY](#) (PDF, English)

Product Specifications:

- None Available

Application Specifications:

- None Available

Instruction Sheets:

- None Available

CAD Files:

- None Available

Additional Information:

- [Product Line Information](#)

Related Products:

- [Tooling](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- Termination Type = Solder Hook Terminals

Electrical Characteristics:

- Input Voltage (VDC) = 26.5
 - Contact Current Rating (A) = 2
 - Coil Polarity Protection Diode = Without
 - Transistor Driver = Without
 - Coil Resistance (Ω) = 1350
 - MOSFET Driver = Without
 - Coil Power Measurement = Milliwatts
 - Coil Power, Nominal (mW) = 520
 - Actuating System = DC
 - Shock = 75 G's, 6ms
 - Vibration = 30G's, 10 to 3000Hz

Body Related Features:

- [Series](#) = 3SBC 1/5-Size Relay

Contact Related Features:

- Mounting Options = Chassis Mount
 - Enclosure Type = Hermetically Sealed
 - Approved Standards = M39016 Qualified, P Level

Configuration Related Features:

- [Contact Arrangement](#) = 2 Form C, DPDT, 2 C/O
 - Coil Magnetic System = Non Polarized, Monostable
 - Coil Suppression Diode = With

Industry Standards:

- Government/Industry Qualification = Yes
 - Government/Industry Part Number = M39016/37-026P
 - [RoHS/ELV Compliance](#) = Not ELV/RoHS compliant
 - [Lead Free Solder Processes](#) = Not suitable for lead free processing

Conditions for Usage:

- Temperature Range ($^{\circ}\text{C}$) = -65 - +125

Other:

- Brand = CII


BOOKMARK


Corporate Information

Who We Are
Investors
News Room
Supplier Portal
Careers

Quick Links

Check Distributor Inventory
Cross Reference
Find Documents & Drawings
Product Compliance Support Center
Site Map

Customer Support

Email or Chat with Us
Find a Phone Number
Search Knowledge Base
Manage Your Account

Sign up for our eNewsletter

Enter your email address

Follow us on:

