

Specifications and Dimensions

Capacity: AMP-3K/40 — 3,000 lb [1361 kg] max. crimp force
AMP-5K/40 — 5,000 lb [2268 kg] max. crimp force

Noise: 76 dBA maximum at 3,000 lb [1361 kg] full capacity
80 dBA maximum at 5,000 lb [2268 kg] full capacity

Weight: Approx. 150 lb [68 kg]

Height: 20" [510] (without reel support)


Electrical: 100-240 VAC, 50/60 Hz (6A)

- Average <1 A at 120 VAC when used as a bench-top unit at 2 000 cycles per hour operating rate


Air: 90-100 psi [6.21-6.90 bar], 6 scfm [0.00282 m³/s] (when required for use with air-feed applicators)

Note: Optional Air Feed Valve Assembly required (see below).

AMP-3K/40 Terminator

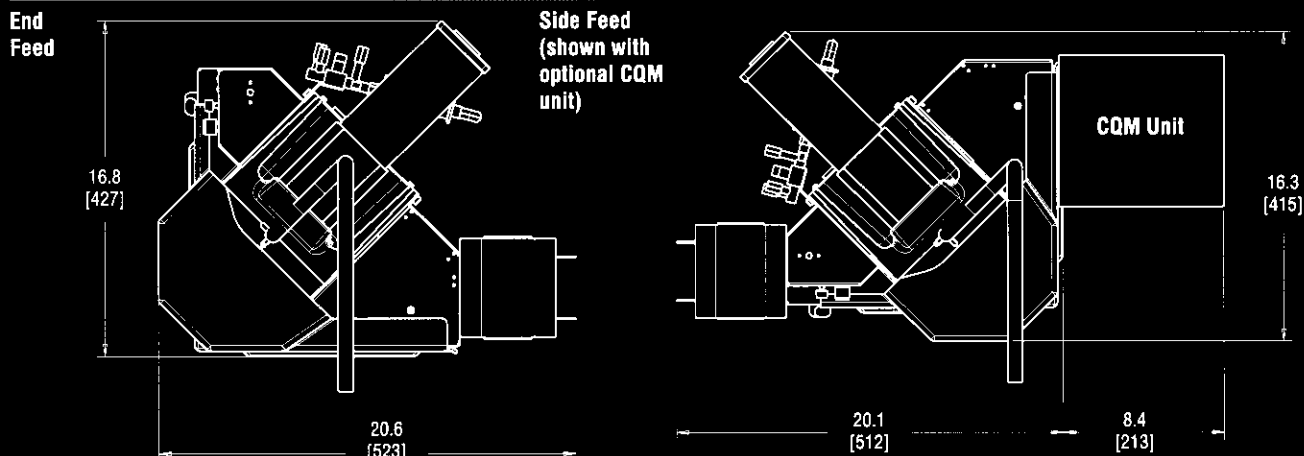

AMP-5K/40 Terminator

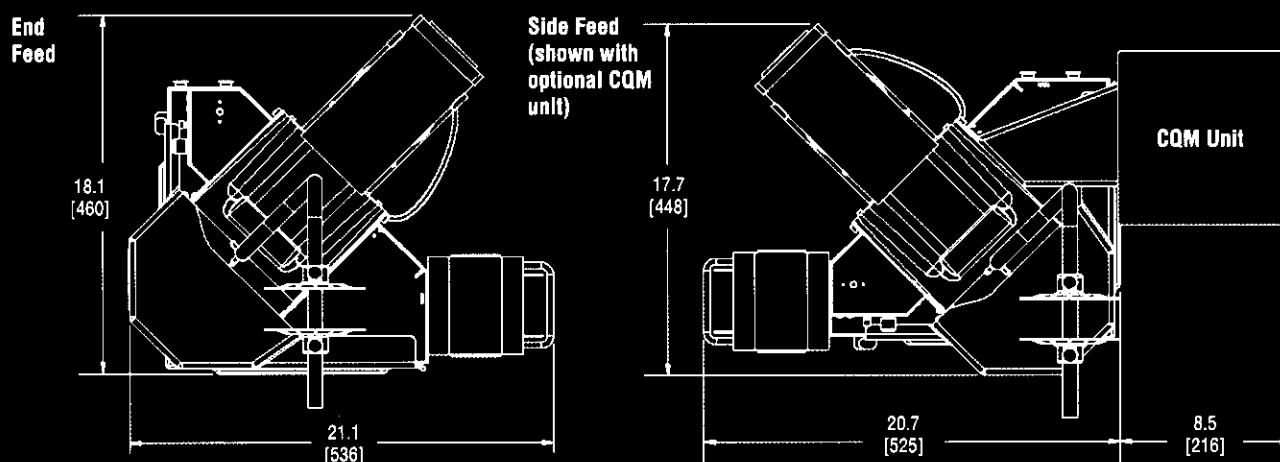

Termination Unit	AMP-3K/40	AMP-5K/40
1 5/8" [40 mm] stroke	1725950-1	1725900-1
1 5/8" [40 mm] stroke with Tool-less Precision Crimp Adjust	1725950-2	1725900-2
1 1/8" [40 mm] stroke with Tool-less Precision Crimp Adjust, CQM Sensors*	1725950-7	1725900-7
1 5/8" [40 mm] stroke, CE	1725950-6	1725900-6
1 5/8" [40 mm] stroke, CE, CQM Sensors*	1725950-9	1725900-9
Optional Features		
Field Retrofit Tool-less Precision Crimp Adjust Kit	1424208-1	1424208-1
Batch Counter	1424267-1	1424267-1
Air Feed Valve Assembly — 1 5/8" [40 mm] stroke	1424266-1	1424266-1
Work Light	1424264-1	1424264-1
Terminal Lubricator Assembly	354550-3	354550-3
CQM Adapter Kit and Sensors*	1424265-1	1424265-1

*Does not include CQM Monitor, P/N 1320420-2 and Cables 1320431-4

Printed on recycled paper.

Tyco Electronics Corporation, Harrisburg, PA 17105; Phone: 717-564-0100; TSC fax: 717-986-3316; www.tooling.tycoelectronics.com