



What can we help you find?



Products

Industries

Resources

About TE

My Account

Innovation

Support Center


[Home](#) > [Products](#) > [Modular Jacks & Plugs](#) > [Product Feature Selector](#) > Product Details

## 1-5406552-4 Product Details

Share

Print

Email

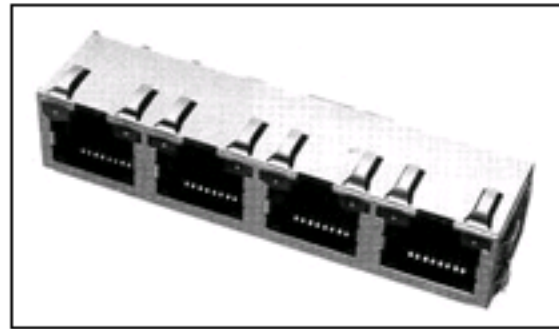

1-5406552-4

TE Internal Number: 1-5406552-4

Active

View 3D PDF

### PCB Mounted Jacks - Single Port, Multi-port and Stacked

Always EU RoHS/ELV Compliant (Statement of Compliance)

#### Product Highlights:

- Connector
- Preloaded
- Multiple Port Configuration
- 1 x 4 Jack Configuration
- Jack Type = RJ45

[View all Features](#)

#### Quick Links

- ▶ [Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

#### Documentation & Additional Information

##### Product Drawings:

- [INVERTED MODULAR JACK ASSEMBLY, 1X4, SHIELED, PANEL...](#) (PDF, English)

##### Catalog Pages/Data Sheets:

- None Available

##### Product Specifications:

- [High Performance Modular Plugs & Jacks, PCB Mounted](#) (PDF, English)

##### Application Specifications:

- [Modular Jacks](#) (PDF, English)

##### Instruction Sheets:

- None Available

##### CAD Files: (CAD Format & Compression Information)

- [2D Drawing](#) (DXF, Version F)
- [3D Model](#) (IGES, Version F)
- [3D Model](#) (STEP, Version F)

##### Additional Information:

- [Product Line Information](#)

##### Related Products:

- [Tooling](#)

[List all Documents](#)

#### Product Features (Please use the Product Drawing for all design activity)

##### Product Type Features:

- Product Type = Connector
- Jack Type = RJ45
- PCB Mounting Orientation = Side Entry (Right Angle)
- PCB Mount Style = Through Hole
- Termination Method to PC Board = Solder
- Performance Category = Cat 5
- LED = With
- Grounding Options = Panel Ground and PCB Ground
- Panel Stops = Without
- Keyed = No
- Profile = Standard
- Color = Black
- Shield Material = Copper Zinc Alloy

##### Mechanical Attachment:

- Panel Mount Retention = Without

##### Electrical Characteristics:

- Shielded = Yes

##### Termination Features:

- Solder Tail Contact Plating = Tin over Nickel

##### Dimensions:

- PCB Tail Length (mm [in]) = 2.54 [0.100]

##### Body Features:

- Inverted Jack Face = Yes
- Shield Plating = Tin over Copper
- Number of Contacts Loaded, RJ45 (8 Positions) = 8
- PCB Ground Tab Location (mm [in]) = -3.43 [-0.135]

##### Contact Features:

- Contact Plating, Mating Area, Material = Gold (50)
- Contact Base Material = Phosphor Bronze

##### Housing Features:

- Housing Material = High Temperature Thermoplastic
- UL Flammability Rating = UL 94V-0

##### Configuration Features:

- Preloaded = Yes
- Port Configuration = Multiple
- Jack Configuration = 1 x 4
- Number of Positions = 8
- Number of Contacts Loaded = 8
- Number of PCB Ground Tabs = 4
- Number of Panel Ground Tabs = 12

##### Industry Standards:

- RoHS/ELV Compliance = RoHS compliant, ELV compliant
- Lead Free Solder Processes = Wave solder capable to 260°C, Wave solder capable to 240°C, Wave solder capable to 265°C
- RoHS/ELV Compliance History = Always was RoHS compliant

##### Identification Marking:

- LED Position 1 Color = Green
- LED Position 2 Color = Red
- LED Position 3 Color = None

##### Packaging Features:

- Packaging Method = Tray
- Packaging Quantity = 32

##### Product Availability:

- Region = Asia, North America

##### Other:

- Brand = AMP
- Comment = Recommended applications: Fast Ethernet, 10Base-T Ethernet, and 10/100 Base-T Ethernet (Cat 5 on two pair 1/2, 3/6).

#### Corporate Information

[About TE](#)

[Investors](#)

[News Room](#)

[Supplier Portal](#)

[Careers](#)

[Terms & Conditions](#)

[Privacy Policy](#)

#### Quick Links

[Distributor Inventory](#)

[Product Cross Reference](#)

[Documents & Drawings](#)

[Product Compliance Support Center](#)

[Site Map](#)

#### Customer Support

[Email or Chat With Us](#)

[Find a Phone Number](#)

[Knowledge Base](#)

[Manage Your Account](#)

#### Keep Me Informed

