


 Live Product Chat US Only
8:30am - 5pm ET, Mon - Fri

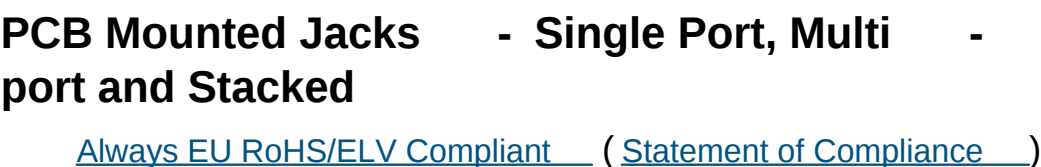

 Active

- ? Jack
- ? Multiple Port Configuration
- ? 1 x 4 Jack Configuration
- ? Jack Type = Combination RJ11, RJ45 and RJ22
- ? Number of Positions = 8/4/4/6

[View all Features](#) | [Find Similar Products](#)

[Check Pricing & Availability](#)
[Search for Tooling](#)
[Product Feature Selector](#)
[Contact Us About This Product](#)

Product Drawings:

- [INVERTED MODULAR JACK ASSEMBLY, 1X4, SHIELDED, PANEL... \(PDF, English\)](#)

Catalog Pages/Data Sheets:

- ? None Available

Product Specifications:

- [High Performance Modular Plugs & Jacks, PCB Mounted](#) (PDF, English)

Application Specifications:

- ? [Modular Jacks](#) (PDF, English)

Instruction Sheets:

- ? None Available

CAD Files: ([CAD Format & Compression Information](#))

- ? 2D Drawing (DXF, Version A)
- ? 3D Model (IGES, Version A)
- ? 3D Model (STEP, Version A)

List all Documents

Additional Information:

- ## ? Product Line Information

Related Products:

- ## ? Tooling

Product Features

Product Type Features:

- ? Product Type = Jack
 ? Jack Type = Combination RJ11, RJ45 and RJ22
 ? Number of Positions = 8/4/4/6
 ? PCB Mount Angle = Side Entry (Right Angle)
 ? PCB Mount Style = Thru Hole
 ? PCB Termination Type = Solder
 ? Shielded = Yes
 ? Performance Category = Cat 5
 ? Number of Contacts Loaded = 8
 ? Grounding Options = Panel Ground and PCB Ground
 ? Panel Stops = Without
 ? Keyed = No
 ? Profile = Low
 ? Color = Black
 ? Shield Material = Copper Zinc Alloy
 ? Comment = Recommended applications: Fast Ethernet, 10Base -T Ethernet, and 10/100 Base -T Ethernet (Cat 5 on two pair 1/2, 3/6). Left jack has 8 positions with 8 positions loaded contacts and is the only jack with LED's.

Mechanical Attachment:

- ? Jack Configuration = 1 x 4
- ? Panel Attachment = Without

Termination Related Features:

- ? Solder Tail Contact Plating = Tin over Nickel

Body Related Features:

- Port Configuration = Multiple
 Inverted Jack Face = Yes
 LED = With
 Shield Plating = Tin over Copper
 Number of PCB Ground Tabs = 4
 PCB Tail Length (mm [in]) = 2.48 [0.097]
 Number of Contacts Loaded, RJ11 (6 Positions) = 6
 Number of Contacts Loaded, RJ45 (8 Positions) = 8
 PCB Ground Tab Location (mm [in]) = -3.43 [-0.135]

Contact Related Features:

- ? Contact Mating Area Plating (RJ11) = Gold (50) over Nickel (50)
- ? Contact Mating Area Plating (RJ22) = Gold (50) over Nickel (50)
- ? Contact Mating Area Plating (RJ45) = Gold (50) over Nickel (50)
- ? Contact Material = Phosphor Bronze

Housing Related Features:

- | | | |
|---|---|----|
| ? | Number of Panel Ground Tabs = 12 | |
| ? | Housing Material = Thermoplastic High Temperature | |
| ? | Housing Flammability Rating = UL 94V | -0 |

Industry Standards:

- ? RoHS/ELV Compliance = RoHS compliant, ELV compliant
- ? Lead Free Solder Processes = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- ? RoHS/ELV Compliance History = Always was RoHS compliant

Identification Marking:

- ? LED Position 1 Color = Orange
 ? LED Position 2 Color = Green
 ? LED Position 3 Color = None

Packaging Related Features:

- ? Packaging Method = Tray
? Packaging Quantity = 128

Other:

- ? Brand = AMP