

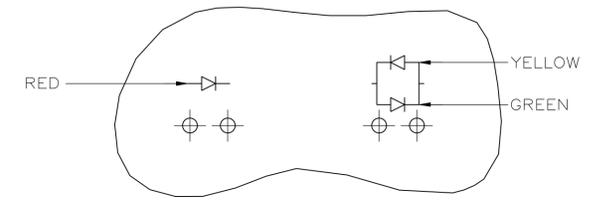
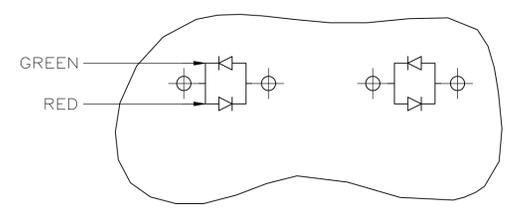
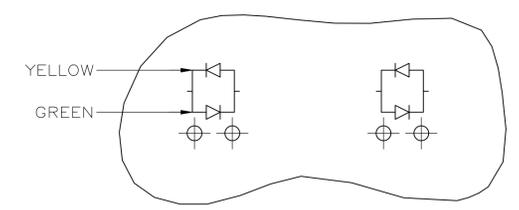
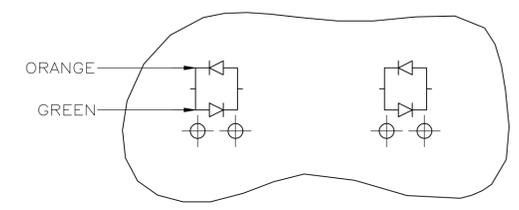
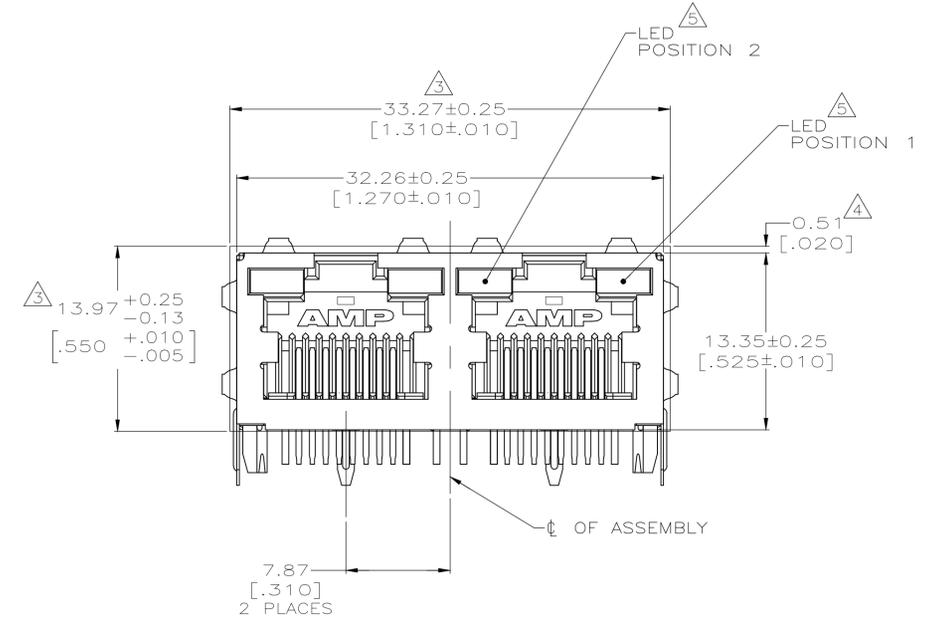


REVISIONS				
REV	DATE	DESCRIPTION	BY	APPV
G3	24OCT2018	ECO-14-018192	LL	SH

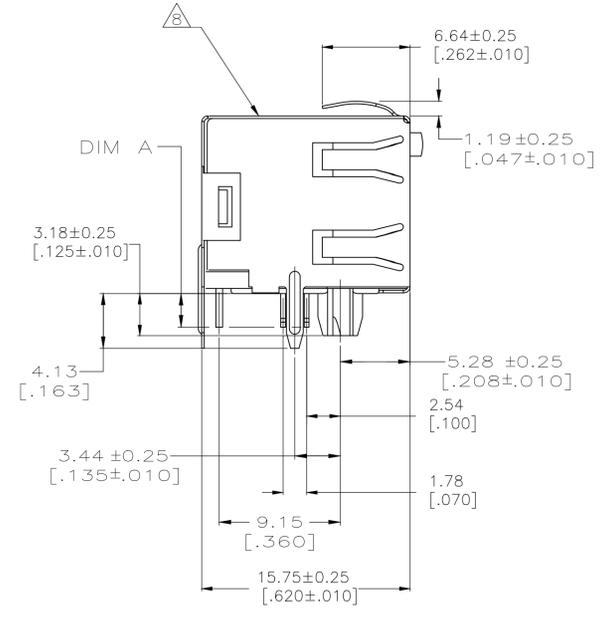

- MATERIAL:  
HOUSING - HIGH TEMPERATURE THERMOPLASTIC, COLOR: BLACK, UL94V-0  
TERMINALS - 0.36[.014] THICK PHOS BRONZE PLATED WITH 3.81µm[.000150] MIN THICK BRIGHT TIN LEAD IN SOLDER AREA, 1.27µm[.000050] MIN GOLD IN LOCALIZED PLATE AREA. ENTIRE TERMINAL PLATED WITH 1.27µm[.000050] MIN THICK NICKEL.  
SHIELD - 0.196[.0077] THICK COPPER ZINC ALLOY PREPLATED WITH 1.27µm[.000050] MIN SATIN NICKEL WITH 2.03µm[.000080] MIN TIN POST DIPPED ON PCB GROUND TABS  
LIGHT EMITTING DIODE (LED) - DIFFUSED EPOXY LENS, 0.51 X 0.51[.020 X .020] CARBON STEEL WIREFRAME LEADS PLATED WITH 8.89µm[.000350] TIN/COPPER OVER 2.03µm[.000080] SILVER OVER 1.02µm[.000040] NICKEL UNDERPLATE OVER 2.03µm[.000080] COPPER UNDERPLATE
  - JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F.
- △ SUGGESTED PANEL OPENING DIMENSIONS.
  - △ SUGGESTED CLEARANCE BETWEEN TOP OF CONNECTOR AND TOP PANEL OPENING.
  - △ SEE TABLE FOR COLOR OF LEDS AND NUMBER REQUIRED.
  - 6. THIS MODULAR JACK WITH INTEGRATED LED IS NOT IR REFLOW SOLDERING PROCESS COMPATIBLE.
  - △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
  - △ MANUFACTURING DATE CODE:  
LOCATED APPROX. AS SHOWN.  
FIRST 2 DIGITS= LAST 2 DIGITS OF YEAR.  
NEXT 2 DIGITS= MANUFACTURING WORK WEEK.  
LAST DIGIT= DAY OF WEEK WITH SUNDAY=1.

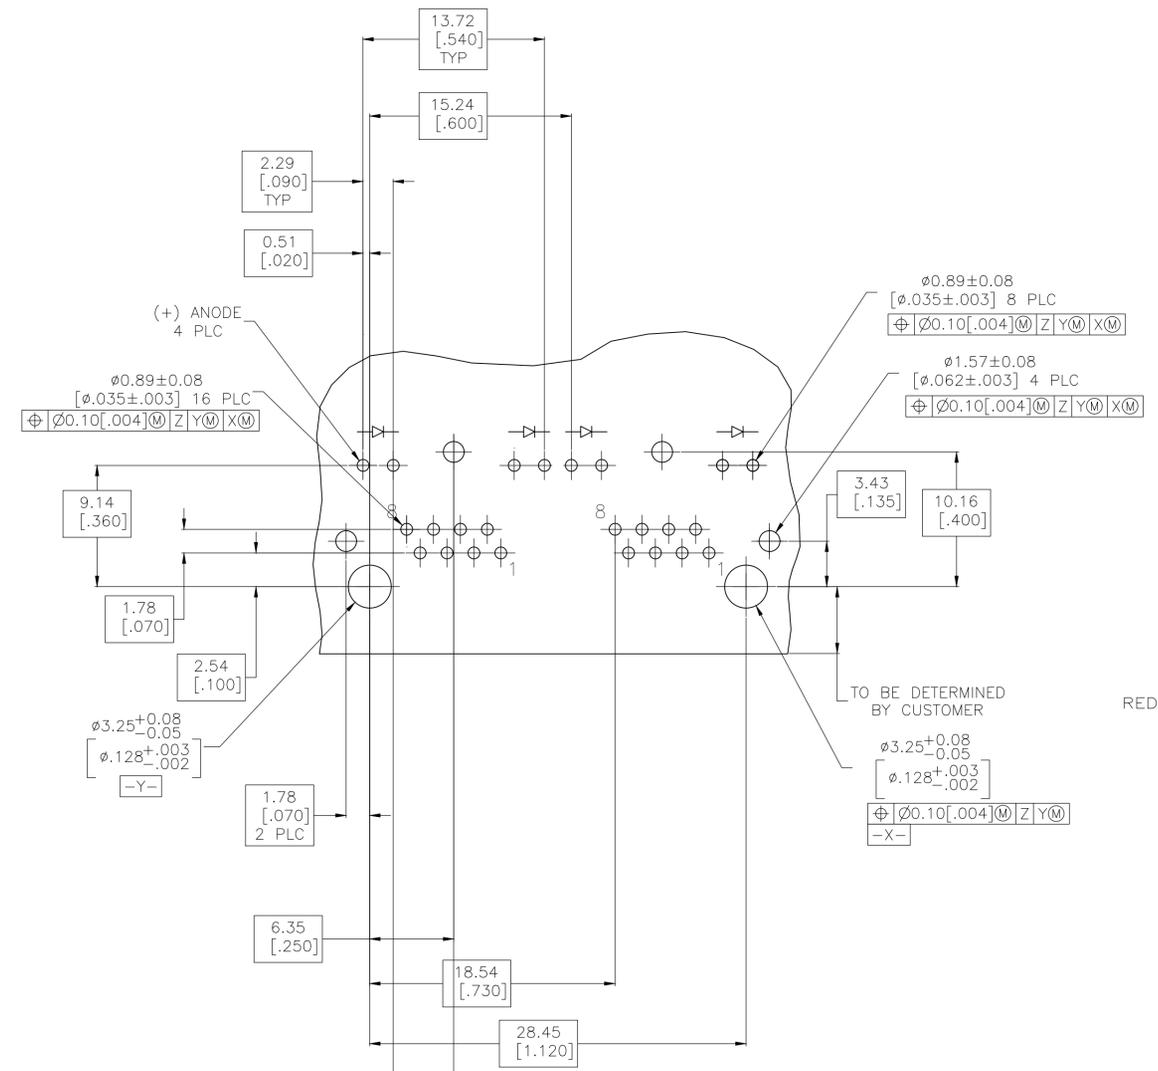

RECOMMENDED PRINTED CIRCUIT BOARD LAYOUT (COMPONENT SIDE)

REVISION	DATE	DESCRIPTION	BY	APPV
△ SUPERSEDED BY 2-6116353-8	3.05 [.120]	YELLOW/GREEN	YELLOW/GREEN	-2- 1116353-8
△ SUPERSEDED BY 2-6116353-4	3.05 [.120]	GREEN	GREEN	-2- 1116353-4
<b>SUPERSEDED</b>	2.54 [.100]	RED	YELLOW/GREEN	2- 1116353-3
△ SUPERSEDED BY 1-6116353-3	2.54 [.100]	RED/GREEN	RED/GREEN	-1- 1116353-3
<b>OBSOLETE</b>	2.54 [.100]	YELLOW/GREEN	YELLOW/GREEN	-1116353-8
△ OBSOLETE	2.54 [.100]	ORANGE/GREEN	ORANGE/GREEN	-1116353-7
<b>OBSOLETE</b>	2.54 [.100]	YELLOW	YELLOW	1116353-6
<b>OBSOLETE</b>	2.54 [.100]	GREEN	GREEN	-1116353-5
<b>OBSOLETE</b>	2.54 [.100]	GREEN	YELLOW	1116353-4
△ OBSOLETE	2.54 [.100]	YELLOW	-	-1116353-3
△ SUPERSEDED BY 6116353-2	2.54 [.100]	-	GREEN	-1116353-2
	2.54 [.100]	YELLOW	GREEN	1116353-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN DLD/L.A.MAYER 09OCT2007		<b>STE</b> TE Connectivity	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:			
0 PLC ± -		1 PLC ± -		APVD S.FLICKINGER 09OCT2007 NAME	
2 PLC ± 0.25[.010]		3 PLC ± -		PRODUCT SPEC	
4 PLC ± -		ANGLES ± -		APPLICATION SPEC	
MATERIAL SEE NOTE 1		FINISH SEE NOTE 1		WEIGHT 0.000000	
				SIZE CASE CODE DRAWING NO. RESTRICTED TO	
				A1 00779 ©=1116353	
				CUSTOMER DRAWING SCALE 4:1 SHEET 1 OF 1 REV G3	