


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
IR	-		A	INITIAL RELEASE	28DEC2012	PKS	RRP
			A1	REVISED PER ECR-16-015261	28OCT2016	RS	TD
			A2	REVISED PER ECR-19-017984	27NOV2019	PC	MK


NOTES:

1. CONTINUOUS STRIP ON REELS
2. WIRE RANGE: 18-14 AWG [0.8-2.0 SQ.mm]
3. INSULATION RANGE: Ø2.67-4.32
4. FEED [PITCH] : 18.0

5 AMP LOGO

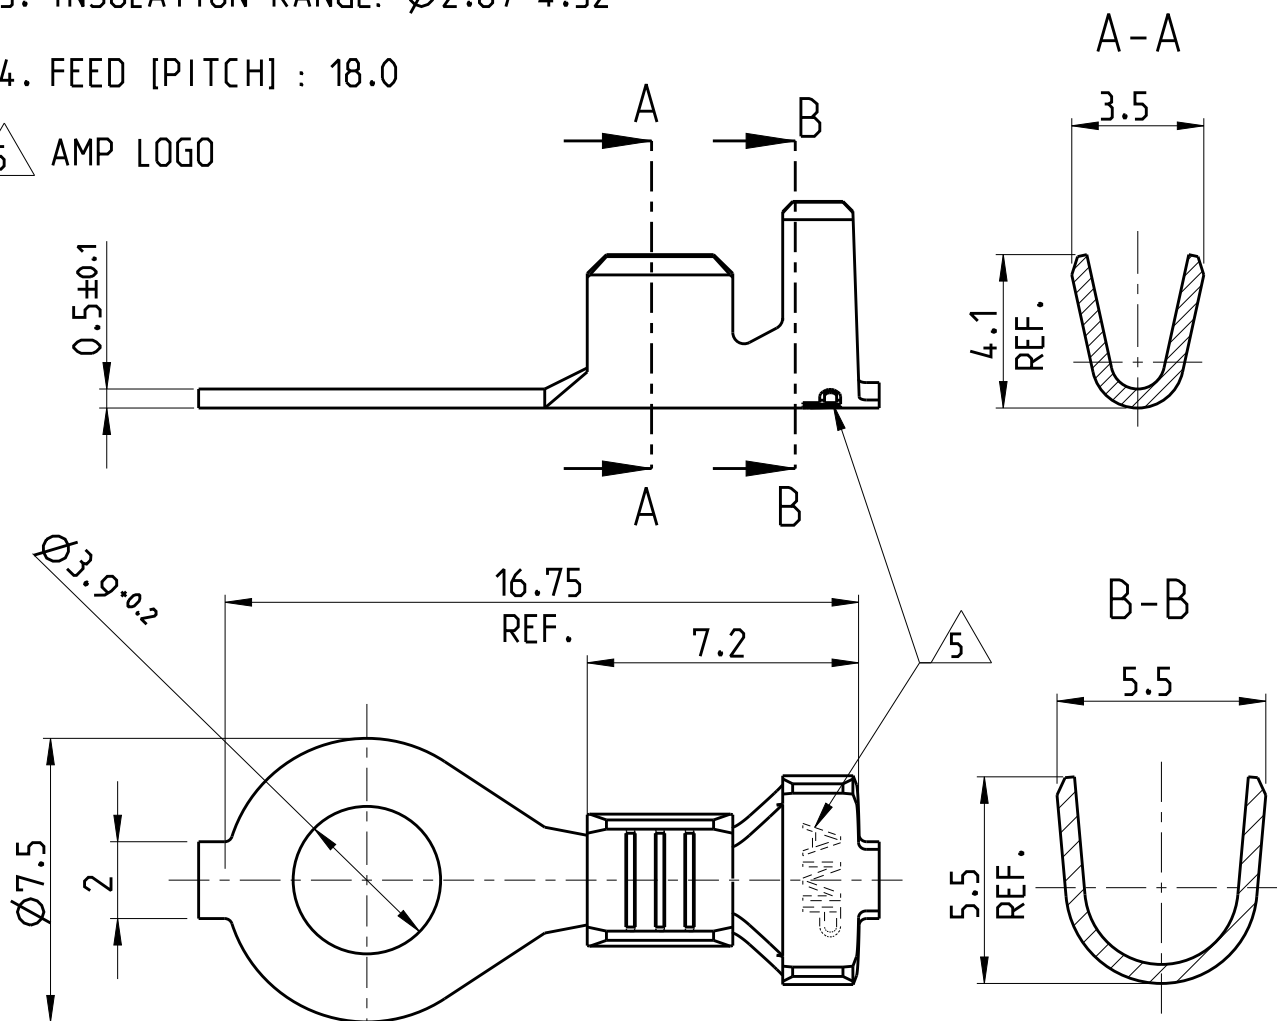

	PRE-TIN; 1-3 μ m	BRASS	2178506-3
OBSOLETE	PRE-TIN; 1-3 μm	BRASS	2178506-2
OBSOLETE	NONE	BRASS	2178506-1
	FINISH	MATERIAL	PART NO

DIMENSIONS:		DWN SENTHIL	28DEC2012	MATERIAL		SEE TABLE		FINISH		SEE TABLE				
mm		CHK SENTHIL	28DEC2012	TE Connectivity										
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD RAJENDRA	28DEC2012											
0 PLC	±0.2	PRODUCT SPEC		NAME										
1 PLC	±0.2													
2 PLC	±0.1	APPLICATION SPEC		RING TONGUE TERMINAL STUD DIA. 3.9; M3.5										
3 PLC	±0.05													
4 PLC	±	114-2084		SIZE	CAGE CODE	DRAWING NO			RESTRICTED TO					
ANGLES	±1°			WEIGHT	0.4g approx.		A 4	00779	C-2178506			-		
		CUSTOMER DRAWING				SCALE		5:1		SHEET 1 OF 1		REV	A2	