


LOC	DIST	REVISIONS				
H	—	P	LTR	DESCRIPTION	DATE	APVD
		D		VENDOR CHANGE ROLL BACK	30DEC2012	SP RP

NOTE:
1 RANGE: Ø21 MAX.
2 MIN. TENSILE STRENGTH 82N.

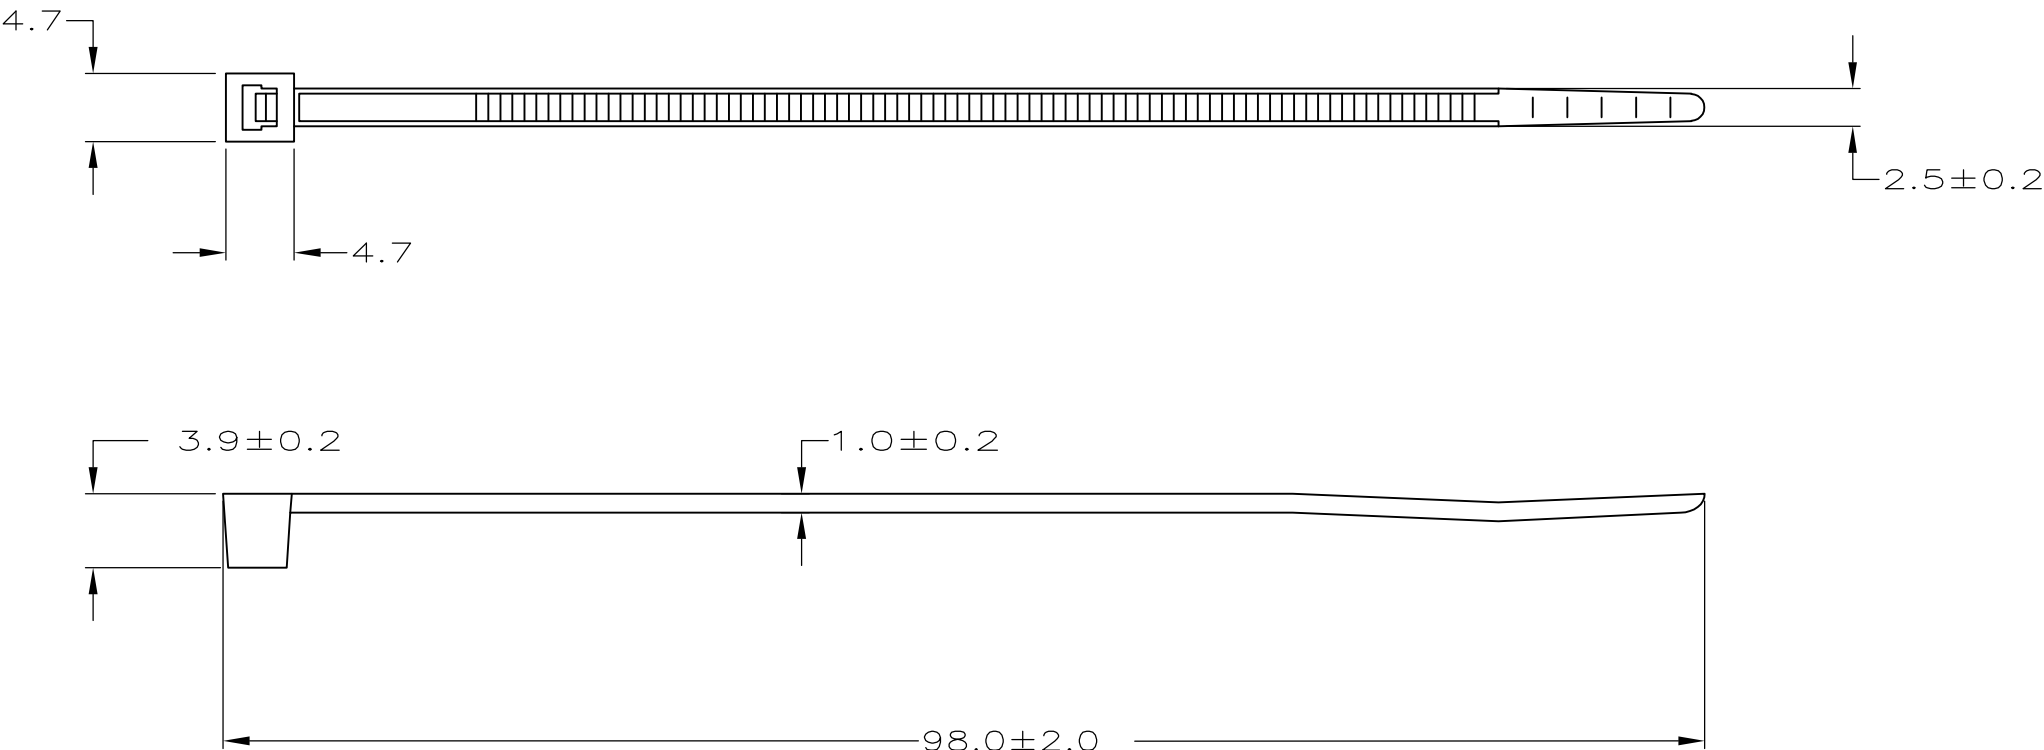

1000	BLACK	POLYAMIDE 6.6	4-160967-2
1000	NATURAL	POLYAMIDE 6.6	4-160967-1
100	BLACK	POLYAMIDE 6.6	2-160967-2
100	NATURAL	POLYAMIDE 6.6	2-160967-1
QTY	FINISH	MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± 0.4
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -

MATERIAL
SEE TABLE

FINISH
SEE TABLE

DWN
J.V.D.HEIJDEN.
27-02-92

CHK
R.VOS.

APVD
L.V.SOEST.

PRODUCT SPEC
—

APPLICATION SPEC
—

WEIGHT
—

TE Connectivity

CABLE TIE

SIZE
A3

CAGE CODE
00779

DRAWING NO
C-160967

RESTRICTED TO
—

CUSTOMER DRAWING

SCALE
NTS

SHEET
1 OF 1

REV
D