

Low-Power, Single-Supply, Fixed-Gain Video Buffer Amplifier

FEATURES

- **HIGH BANDWIDTH:** 80MHz (G = +2)
- **LOW SUPPLY CURRENT:** 3.9mA
- **FLEXIBLE SUPPLY RANGE:**
+2.8V to +11V Single Supply
±1.4V to ±5.5V Dual Supply
- **INPUT RANGE INCLUDES GROUND ON SINGLE SUPPLY**
- **4.9V_{pp} OUTPUT SWING ON +5V SUPPLY**
- **HIGH SLEW RATE:** 350V/μsec
- **LOW INPUT VOLTAGE NOISE:** 9.3nV/√Hz
- **Pb-FREE SOT23 PACKAGE**

APPLICATIONS

- **SINGLE-SUPPLY VIDEO LINE DRIVERS**
- **CCD IMAGING CHANNELS**
- **LOW-POWER ULTRASOUND**
- **PORTABLE CONSUMER ELECTRONICS**

DESCRIPTION


The OPA832 is a low-power, high-speed, fixed-gain amplifier designed to operate on a single +3.3V or +5V supply. Operation on ±5V or +10V supplies is also supported. The input range extends below ground and to within 1V of the positive supply. Using complementary common-emitter outputs provides an output swing to within 30mV of ground and 130mV of the positive supply. The high output drive current and low differential gain and phase errors also make it ideal for single-supply consumer video products.

Low distortion operation is ensured by the high gain bandwidth product (200MHz) and slew rate (850V/μs), making the OPA832 an ideal input buffer stage to 3V and 5V CMOS converters. Unlike other low-power, single-supply amplifiers, distortion performance improves as the signal swing is decreased. A low 9.3nV/√Hz input voltage noise supports wide dynamic range operation.


The OPA832 is available in an industry-standard SO-8 package. The OPA832 is also available in an ultra-small SOT23-5 package. For gains other than +1, -1, or +2, consider using the OPA830.

RELATED PRODUCTS

| DESCRIPTION | SINGLES | DUALS | TRIPLES | QUADS |
|-----------------------------|---------|---------|---------|---------|
| Medium Speed | OPA830 | OPA2830 | — | OPA4830 |
| Medium Speed, Fixed Gain | — | OPA2832 | OPA3832 | — |

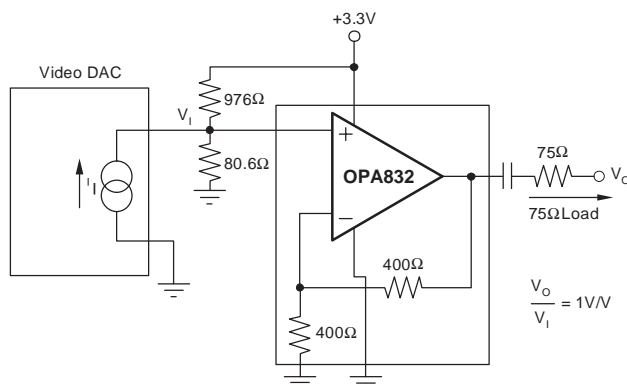

Single-Supply, Low-Cost Video Line Driver

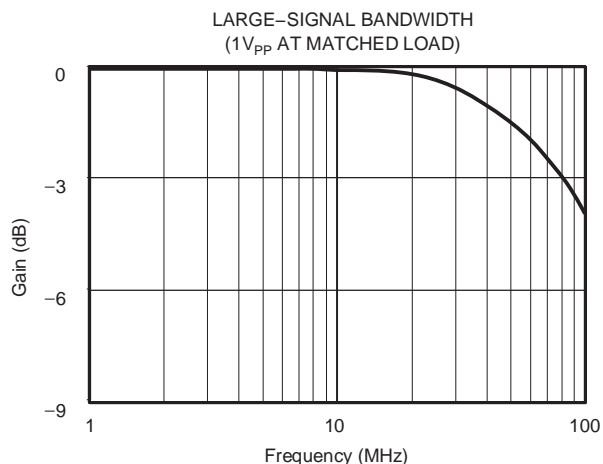

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

All trademarks are the property of their respective owners.

ABSOLUTE MAXIMUM RATINGS⁽¹⁾

| | |
|---|---------------------------------|
| Power Supply | +12V _{DC} |
| Internal Power Dissipation | See Thermal Analysis |
| Differential Input Voltage ⁽²⁾ | ±1.2V |
| Input Voltage Range (Single Supply) | –0.5V to +V _S + 0.3V |
| Storage Temperature Range: D, DBV | –40°C to +125°C |
| Lead Temperature (soldering, 10s) | +300°C |
| Junction Temperature (T _J) | +150°C |
| ESD Rating: | |
| Human Body Model (HBM) | 2000V |
| Charge Device Model (CDM) | 1500V |
| Machine Model (MM) | 200V |

(1) Stresses above these ratings may cause permanent damage. Exposure to absolute maximum conditions for extended periods may degrade device reliability. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those specified is not supported.

(2) Noninverting input to internal inverting node.



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.


ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

PACKAGE/ORDERING INFORMATION⁽¹⁾

| PRODUCT | PACKAGE-LEAD | PACKAGE DESIGNATOR | SPECIFIED TEMPERATURE RANGE | PACKAGE MARKING | ORDERING NUMBER | TRANSPORT MEDIA, QUANTITY |
|---------|--------------------|--------------------|-----------------------------|-----------------|-----------------|---------------------------|
| OPA832 | SO-8 Surface-Mount | D | –40°C to +85°C | OPA832 | OPA832ID | Rails, 100 |
| " | " | " | " | " | OPA832IDR | Tape and Reel, 2500 |
| OPA832 | SOT23-5 | DBV | –40°C to +85°C | A74 | OPA832IDBVT | Tape and Reel, 250 |
| " | " | " | " | " | OPA832IDBVR | Tape and Reel, 3000 |

(1) For the most current package and ordering information, see the Package Option Addendum located at the end of this data sheet.

PIN CONFIGURATIONS

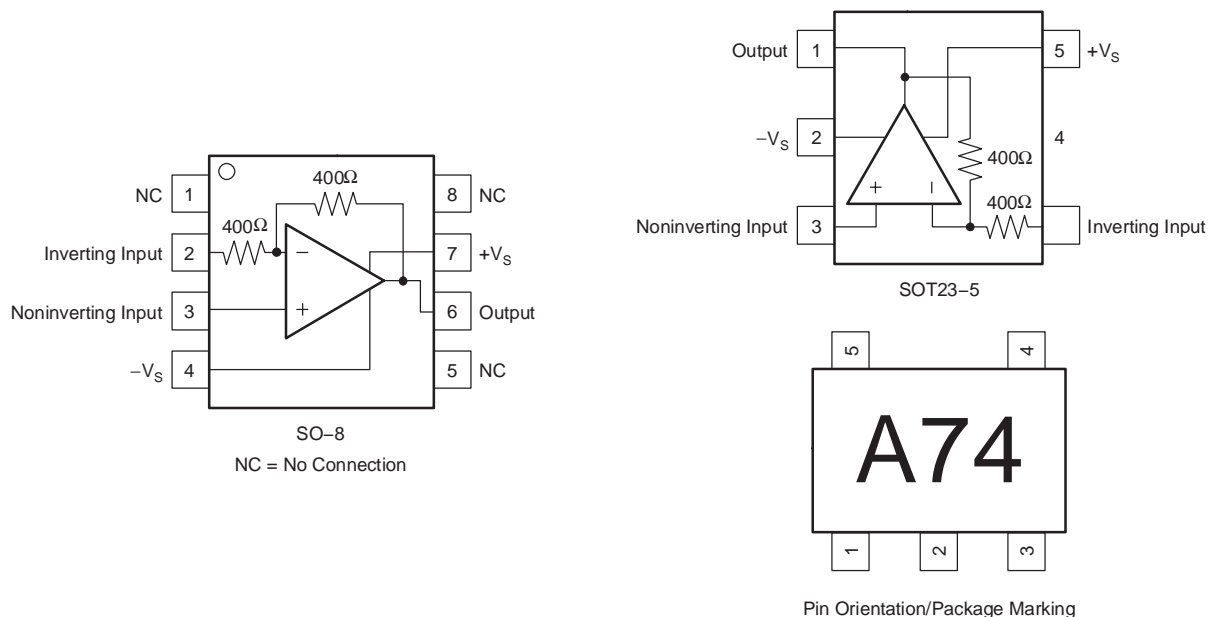

ELECTRICAL CHARACTERISTICS: $V_S = \pm 5V$
Boldface limits are tested at +25°C.

At $T_A = 25^\circ\text{C}$, $G = +2$, and $R_L = 150\Omega$ to GND, unless otherwise noted (see Figure 3).

| PARAMETER | CONDITIONS | OPA832ID, IDBV | | | | UNITS | MIN/ MAX | TEST LEVEL(3) |
|--|---|----------------|--------------------------|-------------------|----------------------|----------|-------------|------------------|
| | | TYP | MIN/MAX OVER TEMPERATURE | | | | | |
| | | +25°C | +25°C(1) | 0°C to 70°C(2) | −40°C to +85°C(2) | | | |
| AC PERFORMANCE (see Figure 3) | | | | | | | | |
| Small-Signal Bandwidth | G = +2, V _O ≤ 0.5V _{pp} | 80 | 55 | 54 | 54 | MHz | min | B |
| | G = −1, V _O ≤ 0.5V _{pp} | 99 | 57 | 56 | 56 | MHz | min | B |
| Peaking at a Gain of +1 | V _O ≤ 0.5V _{pp} | 4.2 | | | | dB | typ | C |
| Slew Rate | G = +2, 2V Step | 350 | 230 | 230 | 220 | V/μs | min | B |
| Rise Time | 0.5V Step | 4.6 | | | | ns | max | B |
| Fall Time | 0.5V Step | 4.9 | | | | ns | max | B |
| Settling Time to 0.1% | G = +2, 1V Step | 45 | | | | ns | max | B |
| Harmonic Distortion | V _O = 2V _{pp} , 5MHz | | | | | | | |
| 2nd-Harmonic | R _L = 150Ω | −64 | −60 | −60 | −60 | dBc | max | B |
| | R _L = 500Ω | −66 | −63 | −63 | −63 | dBc | max | B |
| 3rd-Harmonic | R _L = 150Ω | −57 | −50 | −49 | −48 | dBc | max | B |
| | R _L = 500Ω | −73 | −64 | −61 | −57 | dBc | max | B |
| Input Voltage Noise | f > 1MHz | 9.2 | | | | nV/√Hz | max | B |
| Input Current Noise | f > 1MHz | 2.2 | | | | pA/√Hz | max | B |
| NTSC Differential Gain | R _L = 150Ω | 0.10 | | | | % | typ | C |
| NTSC Differential Phase | R _L = 150Ω | 0.16 | | | | ° | typ | C |
| DC PERFORMANCE(4) | | | | | | | | |
| Gain Error | G = +2 | ±0.3 | ±1.5 | ±1.6 | ±1.7 | % | min | A |
| | G = −1 | ±0.2 | ±1.5 | ±1.6 | ±1.7 | % | max | B |
| Internal R _F and R _G | | | | | | | | |
| Maximum | | 400 | 455 | 460 | 462 | Ω | max | A |
| Minimum | | 400 | 345 | 340 | 338 | Ω | max | A |
| Average Drift | | | | ±0.1 | ±0.1 | %/°C | max | B |
| Input Offset Voltage | | ±1.4 | ±7 | ±8 | ±8.5 | mV | max | A |
| Average Offset Voltage Drift | | — | | ±20 | ±20 | μV/°C | max | B |
| Input Bias Current | | +5.5 | +10 | +12 | +13 | μA | max | A |
| Input Bias Current Drift | | | | ±12 | ±12 | nA/°C | max | B |
| Input Offset Current | | ±0.1 | ±1.5 | ±2 | ±2.5 | μA | max | A |
| Input Offset Current Drift | | — | | ±10 | ±10 | nA/°C | max | B |
| INPUT | | | | | | | | |
| Negative Input Voltage Range | | −5.4 | −5.2 | −5.0 | −4.9 | V | max | B |
| Positive Input Voltage Range | | 3.2 | 3.1 | 3.0 | 2.9 | V | min | A |
| Input Impedance | | | | | | | | |
| Differential Mode | | 10 2.1 | | | | kΩ pF | typ | C |
| Common-Mode | | 400 1.2 | | | | kΩ pF | typ | C |
| OUTPUT | | | | | | | | |
| Output Voltage Swing | R _L = 1kΩ to GND | ±4.9 | ±4.8 | ±4.75 | ±4.75 | V | max | A |
| | R _L = 150Ω to GND | ±4.6 | ±4.5 | ±4.45 | ±4.4 | V | max | A |
| Current Output, Sinking | | 85 | 65 | 60 | 55 | mA | min | A |
| Current Output, Sourcing | | 85 | 65 | 60 | 55 | mA | min | A |
| Short-Circuit Current | Output Shorted to Either Supply | 120 | | | | mA | typ | C |
| Closed-Loop Output Impedance | G = +2, f ≤ 100kHz | 0.2 | | | | Ω | typ | C |
| POWER SUPPLY | | | | | | | | |
| Minimum Operating Voltage | | ±1.4 | | | | V | min | B |
| Maximum Operating Voltage | | — | ±5.5 | ±5.5 | ±5.5 | V | max | A |
| Maximum Quiescent Current | V _S = ±5V | 4.25 | 4.7 | 5.3 | 5.9 | mA | max | A |
| Minimum Quiescent Current | V _S = ±5V | 4.25 | 4.0 | 3.6 | 3.3 | mA | min | A |
| Power-Supply Rejection Ratio (+PSRR) | Input-Referred | 68 | 63 | 62 | 61 | dB | min | A |
| THERMAL CHARACTERISTICS | | | | | | | | |
| Specification: ID, IDBV | | −40 to +85 | | | | °C | typ | C |
| Thermal Resistance | | | | | | | | |
| D SO-8 | | 125 | | | | °C/W | typ | C |
| DBV SOT23-5 | | 150 | | | | °C/W | typ | C |

(1) Junction temperature = ambient for +25°C specifications.

(2) Junction temperature = ambient at low temperature limits; junction temperature = ambient +5°C at high temperature limit for over temperature specifications.

(3) Test levels: (A) 100% tested at +25°C. Over temperature limits by characterization and simulation. (B) Limits set by characterization and simulation. (C) Typical value only for information.

(4) Current is considered positive out of node.

ELECTRICAL CHARACTERISTICS: $V_S = +5V$ **Boldface** limits are tested at **+25°C**.At $T_A = 25^\circ\text{C}$, $G = +2$, and $R_L = 150\Omega$ to $V_{CM} = 2V$, unless otherwise noted (see Figure 1).

| PARAMETER | CONDITIONS | OPA832ID, IDBV | | | | UNITS | MIN/ MAX | TEST LEVEL ⁽³⁾ |
|--|---|----------------|--------------------------|-------------------------------|----------------------------------|----------|-------------|------------------------------|
| | | TYP | MIN/MAX OVER TEMPERATURE | | | | | |
| | | +25°C | +25°C ⁽¹⁾ | 0°C to 70°C ⁽²⁾ | –40°C to +85°C ⁽²⁾ | | | |
| AC PERFORMANCE (see Figure 1) | | | | | | | | |
| Small-Signal Bandwidth | G = +2, V _O ≤ 0.5V _{PP} | 92 | 56 | 55 | 55 | MHz | min | B |
| | G = –1, V _O ≤ 0.5V _{PP} | 103 | 60 | 58 | 58 | MHz | min | B |
| Peaking at a Gain of +1 | V _O ≤ 0.5V _{PP} | 4.2 | | | | dB | typ | C |
| Slew Rate | G = +2, 2V Step | 348 | 230 | 223 | 223 | V/μs | min | B |
| Rise Time | 0.5V Step | 4.3 | | | | ns | max | B |
| Fall Time | 0.5V Step | 4.6 | | | | ns | max | B |
| Settling Time to 0.1% | G = +2, 1V Step | 4.6 | | | | ns | max | B |
| Harmonic Distortion | V _O = 2V _{PP} , 5MHz | | | | | | | |
| 2nd-Harmonic | R _L = 150Ω | –59 | –56 | –56 | –55 | dBc | max | B |
| | R _L = 500Ω | –62 | –59 | –59 | –59 | dBc | max | B |
| 3rd-Harmonic | R _L = 150Ω | –56 | –50 | –49 | –47 | dBc | max | B |
| | R _L = 500Ω | –72 | –65 | –62 | –58 | dBc | max | B |
| Input Voltage Noise | f > 1MHz | 9.3 | | | | nV/√Hz | max | B |
| Input Current Noise | f > 1MHz | 2.3 | | | | pA/√Hz | max | B |
| NTSC Differential Gain | R _L = 150Ω | 0.11 | | | | % | typ | C |
| NTSC Differential Phase | R _L = 150Ω | 0.14 | | | | ° | typ | C |
| DC PERFORMANCE ⁽⁴⁾ | | | | | | | | |
| Gain Error | G = +2 | ±0.3 | ±1.5 | ±1.6 | ±1.7 | % | min | A |
| | G = –1 | ±0.2 | ±1.5 | ±1.6 | ±1.7 | % | max | B |
| Internal R _F and R _G , Maximum | | 400 | 455 | 460 | 462 | Ω | max | A |
| Minimum | | 400 | 345 | 340 | 338 | Ω | max | A |
| Average Drift | | | | 0.1 | 0.1 | %/°C | max | B |
| Input Offset Voltage | | ±0.5 | ±5 | ±6 | ±6.5 | mV | max | A |
| Average Offset Voltage Drift | | — | | ±20 | ±20 | μV/°C | max | B |
| Input Bias Current | V _{CM} = 2.0V | 5.5 | +10 | +12 | +13 | μA | max | A |
| Input Bias Current Drift | | | | ±12 | ±12 | nA/°C | max | B |
| Input Offset Current | V _{CM} = 2.0V | ±0.1 | ±1.5 | ±2 | ±2.5 | μA | max | A |
| Input Offset Current Drift | | — | | ±10 | ±10 | nA/°C | max | B |
| INPUT | | | | | | | | |
| Least Positive Input Voltage | | –0.5 | –0.2 | 0 | +0.1 | V | max | B |
| Most Positive Input Voltage | | 3.3 | 3.2 | 3.1 | 3.0 | V | min | B |
| Input Impedance | | | | | | | | |
| Differential-Mode | | 10 2.1 | | | | kΩ pF | typ | C |
| Common-Mode | | 400 1.2 | | | | kΩ pF | typ | C |
| OUTPUT | | | | | | | | |
| Least Positive Output Voltage | R _L = 1kΩ to 2.0V | 0.03 | 0.16 | 0.18 | 0.20 | V | max | A |
| | R _L = 150Ω to 2.0V | 0.18 | 0.3 | 0.35 | 0.40 | V | max | A |
| Most Positive Output Voltage | R _L = 1kΩ to 2.0V | 4.94 | 4.8 | 4.6 | 4.4 | V | min | A |
| | R _L = 150Ω to 2.0V | 4.86 | 4.6 | 4.5 | 4.4 | V | min | A |
| Current Output, Sourcing | | 80 | 60 | 55 | 52 | mA | min | A |
| Current Output, Sinking | | 80 | 60 | 55 | 52 | mA | min | A |
| Short-Circuit Output Current | Output Shorted to Either Supply | 100 | | | | mA | typ | C |
| Closed-Loop Output Impedance | G = +2, f ≤ 100kHz | 0.2 | | | | Ω | typ | C |
| POWER SUPPLY | | | | | | | | |
| Minimum Operating Voltage | | +2.8 | | | | V | typ | C |
| Maximum Operating Voltage | | — | +11 | +11 | +11 | V | max | A |
| Maximum Quiescent Current | V _S = +5V | 3.9 | 4.1 | 4.8 | 5.5 | mA | max | A |
| Minimum Quiescent Current | V _S = +5V | 3.9 | 3.7 | 3.5 | 3.2 | mA | min | A |
| Power-Supply Rejection Ratio (PSRR) | Input-Referred | 66 | 61 | 60 | 59 | dB | min | A |
| THERMAL CHARACTERISTICS | | | | | | | | |
| Specification: ID, IDBV | | –40 to +85 | | | | °C | typ | C |
| Thermal Resistance | | | | | | | | |
| D SO-8 | | 125 | | | | °C/W | typ | C |
| DBV SOT23-5 | | 150 | | | | °C/W | typ | C |

(1) Junction temperature = ambient for +25°C specifications.

(2) Junction temperature = ambient at low temperature limits; junction temperature = ambient +5°C at high temperature limit for over temperature.

(3) Test levels: (A) 100% tested at +25°C. Over temperature limits by characterization and simulation. (B) Limits set by characterization and simulation. (C) Typical value only for information.

(4) Current is considered positive out of node.

ELECTRICAL CHARACTERISTICS: $V_S = +3.3V$

Boldface limits are tested at **+25°C**.

At $T_A = 25^\circ C$, $G = +2$, and $R_L = 150\Omega$ to $V_{CM} = 0.75V$, unless otherwise noted (see Figure 2).

| PARAMETER | CONDITIONS | OPA832ID, IDBV | | | UNITS | MIN/ MAX | TEST LEVEL ⁽³⁾ |
|--|---|----------------|-----------------------------|-------------------|----------|-------------|------------------------------|
| | | TYP | MIN/MAX OVER TEMPERATURE | | | | |
| | | +25°C | +25°C(1) | 0°C to 70°C(2) | | | |
| AC PERFORMANCE (see Figure 2) | | | | | | | |
| Small-Signal Bandwidth | G = +2, V _O ≤ 0.5V _{pp} | 95 | 59 | 57 | MHz | min | B |
| | G = −1, V _O ≤ 0.5V _{pp} | 103 | 63 | 61 | MHz | min | B |
| Peaking at a Gain of +1 | V _O ≤ 0.5V _{pp} | 4.2 | | | dB | typ | C |
| Slew Rate | 1V Step | 170 | 115 | 115 | V/μs | min | B |
| Rise Time | 0.5V Step | 4 | | | ns | max | B |
| Fall Time | 0.5V Step | 4.2 | | | ns | max | B |
| Settling Time to 0.1% | 1V Step | 48 | | | ns | max | B |
| Harmonic Distortion | 5MHz | | | | | | |
| 2nd-Harmonic | R _L = 150Ω | −71 | −64 | −62 | dBc | max | B |
| | R _L = 500Ω | −74 | −70 | −66 | dBc | max | B |
| 3rd-Harmonic | R _L = 150Ω | −66 | −60 | −55 | dBc | max | B |
| | R _L = 500Ω | −69 | −66 | −62 | dBc | max | B |
| Input Voltage Noise | f > 1MHz | 9.4 | | | nV/√Hz | max | B |
| Input Current Noise | f > 1MHz | 2.4 | | | pA/√Hz | max | B |
| DC PERFORMANCE⁽⁴⁾ | | | | | | | |
| Gain Error | G = +2 | ±0.3 | ±1.5 | ±1.6 | % | min | A |
| | G = −1 | ±0.2 | ±1.5 | ±1.6 | % | max | B |
| Internal R _F and R _G | | | | | | | |
| Maximum | | 400 | 455 | 460 | Ω | max | A |
| Minimum | | 400 | 345 | 340 | Ω | max | A |
| Average Drift | | | | 0.1 | %/°C | max | B |
| Input Offset Voltage | | ±1 | ±7 | ±8 | mV | max | A |
| Average Offset Voltage Drift | | — | | ±20 | μV/°C | max | B |
| Input Bias Current | V _{CM} = 0.75V | 5.5 | +10 | +12 | μA | max | A |
| Input Bias Current Drift | | | | ±12 | nA/°C | max | B |
| Input Offset Current | V _{CM} = 0.75V | ±0.1 | ±1.5 | ±2 | μA | max | A |
| Input Offset Current Drift | | — | | ±10 | nA/°C | max | B |
| INPUT | | | | | | | |
| Least Positive Input Voltage | | −0.5 | −0.3 | −0.2 | V | max | B |
| Most Positive Input Voltage | | 1.5 | 1.4 | 1.3 | V | min | B |
| Input Impedance, Differential-Mode | | 10 2.1 | | | kΩ pF | typ | C |
| Common-Mode | | 400 1.2 | | | kΩ pF | typ | C |
| OUTPUT | | | | | | | |
| Least Positive Output Voltage | R _L = 1kΩ to 0.75V | 0.03 | 0.16 | 0.18 | V | max | B |
| | R _L = 150Ω to 0.75V | 0.1 | 0.3 | 0.35 | V | max | B |
| Most Positive Output Voltage | R _L = 1kΩ to 0.75V | 3 | 2.8 | 2.6 | V | min | B |
| | R _L = 150Ω to 0.75V | 3 | 2.8 | 2.6 | V | min | B |
| Current Output, Sourcing | | 35 | 25 | 20 | mA | min | A |
| Current Output, Sinking | | 35 | 25 | 20 | mA | min | A |
| Short-Circuit Output Current | Output Shorted to Either Supply | 80 | | | mA | typ | C |
| Closed-Loop Output Impedance | See Figure 2, f < 100kHz | 0.2 | | | Ω | typ | C |
| POWER SUPPLY | | | | | | | |
| Minimum Operating Voltage | | +2.8 | | | V | typ | C |
| Maximum Operating Voltage | | — | +11 | +11 | V | max | A |
| Maximum Quiescent Current | V _S = +3.3V | 3.8 | 4.0 | 4.7 | mA | max | A |
| Minimum Quiescent Current | V _S = +3.3V | 3.8 | 3.4 | 3.2 | mA | min | A |
| Power-Supply Rejection Ratio (PSRR) | Input-Referred | 60 | | | dB | typ | C |
| THERMAL CHARACTERISTICS | | | | | | | |
| Specification: ID, IDBV | | −40 to +85 | | | °C | typ | C |
| Thermal Resistance | | | | | | | |
| D SO-8 | | 125 | | | °C/W | typ | C |
| DBV SOT23-5 | | 150 | | | °C/W | typ | C |

(1) Junction temperature = ambient for +25°C specifications.

(2) Junction temperature = ambient at low temperature limits; junction temperature = ambient +5°C at high temperature limit for over temperature.


(3) Test levels: (A) 100% tested at +25°C. Over temperature limits by characterization and simulation. (B) Limits set by characterization and simulation. (C) Typical value only for information.

(4) Current is considered positive out of node.


TYPICAL CHARACTERISTICS: $V_S = \pm 5V$

At $T_A = 25^\circ C$, $G = +2$, and $R_L = 150\Omega$ to GND, unless otherwise noted (see Figure 3).


SMALL-SIGNAL FREQUENCY RESPONSE

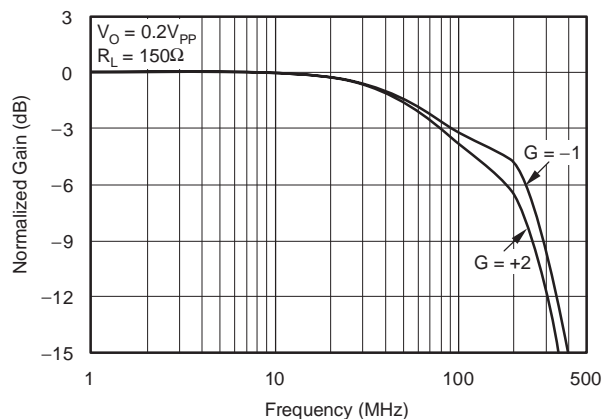



LARGE-SIGNAL FREQUENCY RESPONSE

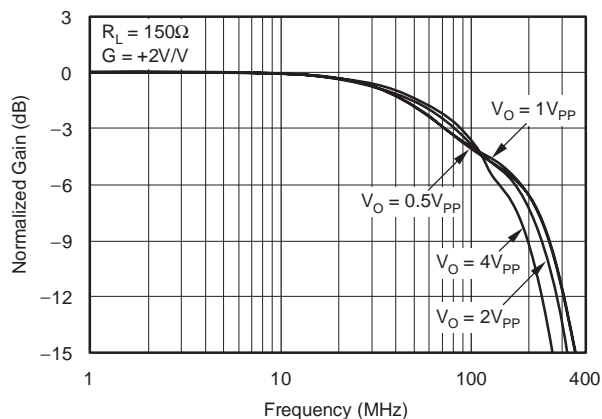


SMALL-SIGNAL PULSE RESPONSE

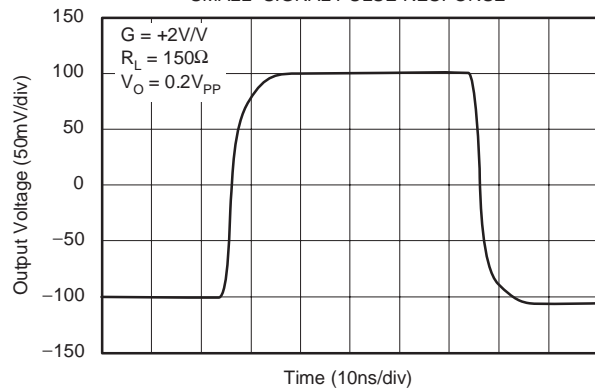

LARGE-SIGNAL PULSE RESPONSE





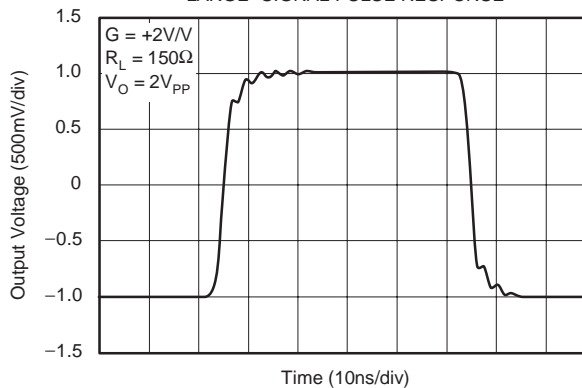
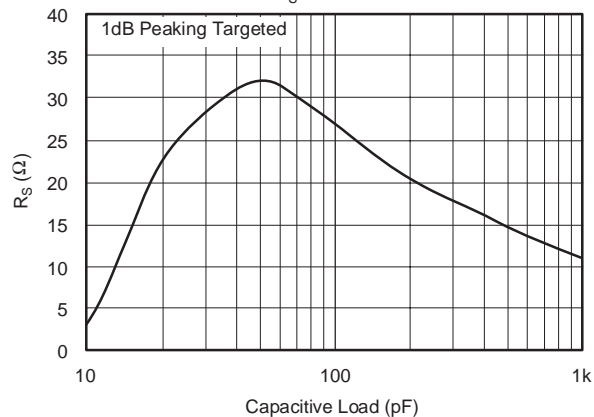
REQUIRED R_S vs CAPACITIVE LOAD

FREQUENCY RESPONSE vs CAPACITIVE LOAD

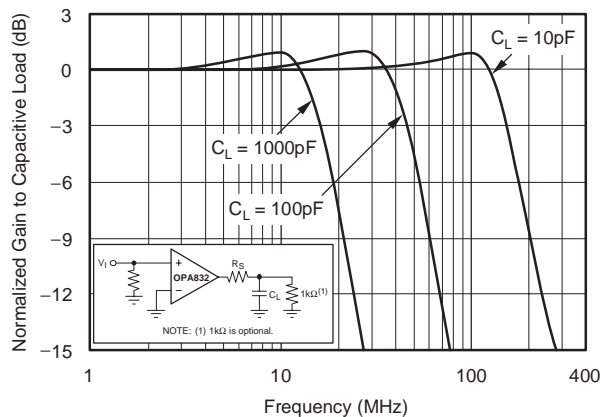

TYPICAL CHARACTERISTICS: $V_S = \pm 5V$ (continued)


At $T_A = 25^\circ C$, $G = +2$, and $R_L = 150\Omega$ to GND, unless otherwise noted (see Figure 3).

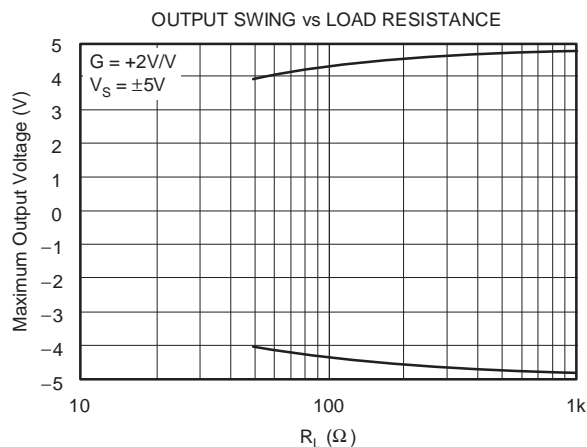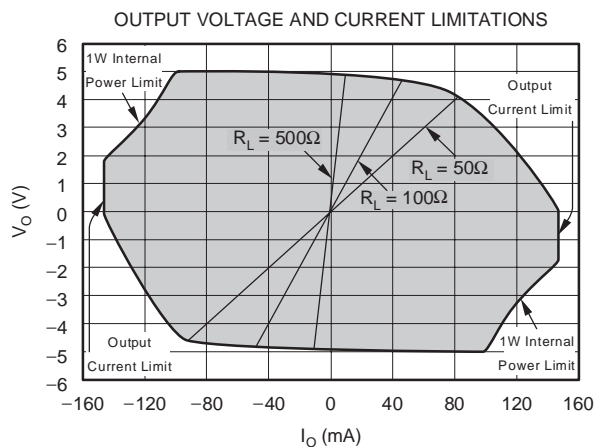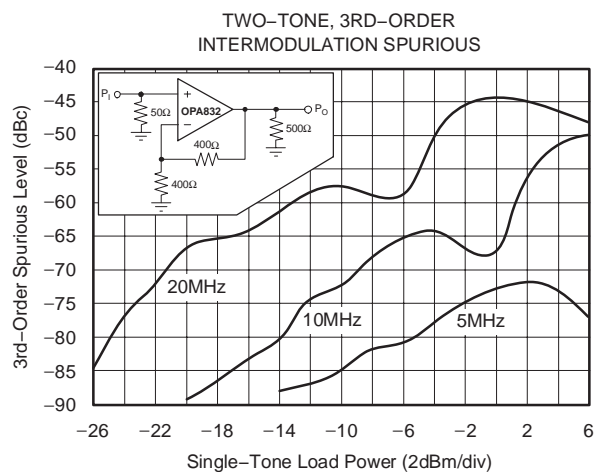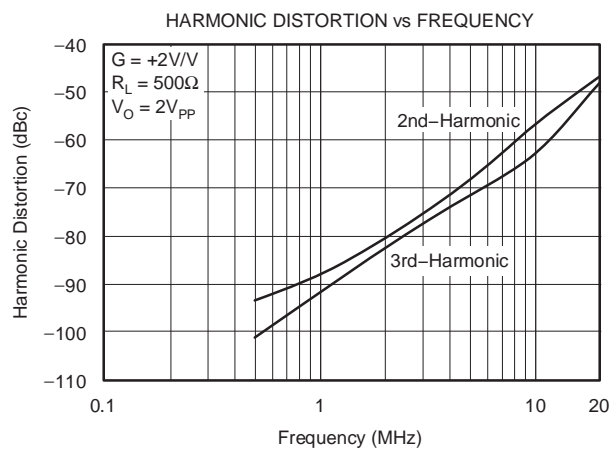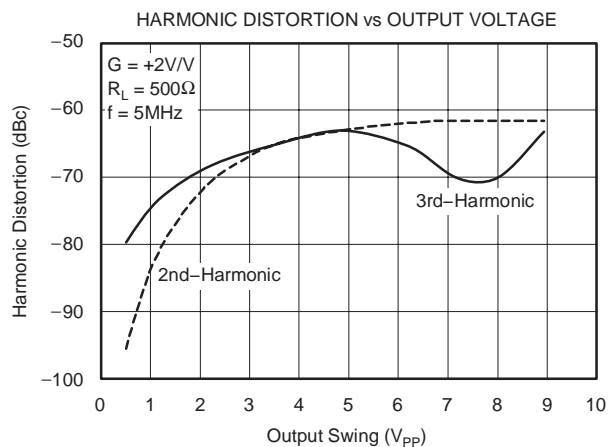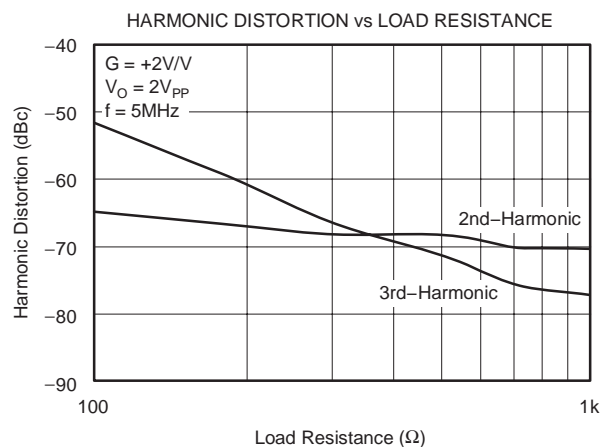


SBOS266D – JUNE 2003 – REVISED MARCH 2006

TYPICAL CHARACTERISTICS: $V_S = +5V$ At $T_A = 25^\circ\text{C}$, $G = +2$, and $R_L = 150\Omega$ to $V_{CM} = 2V$, unless otherwise noted (see Figure 1).


SMALL-SIGNAL FREQUENCY RESPONSE

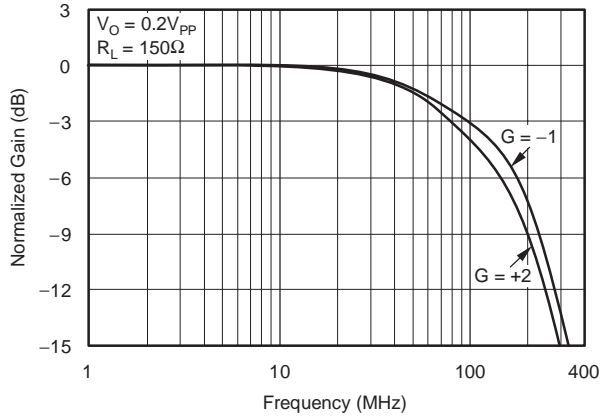



LARGE-SIGNAL FREQUENCY RESPONSE

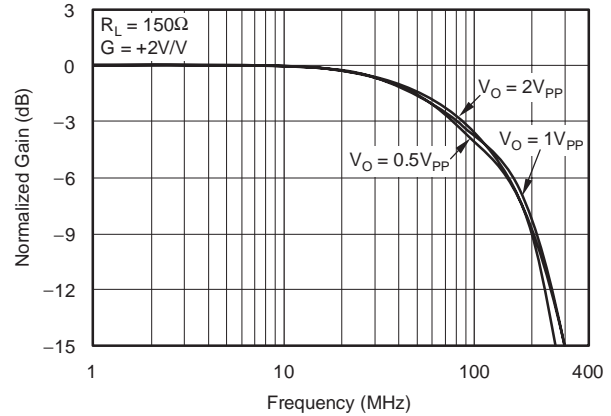


SMALL-SIGNAL PULSE RESPONSE

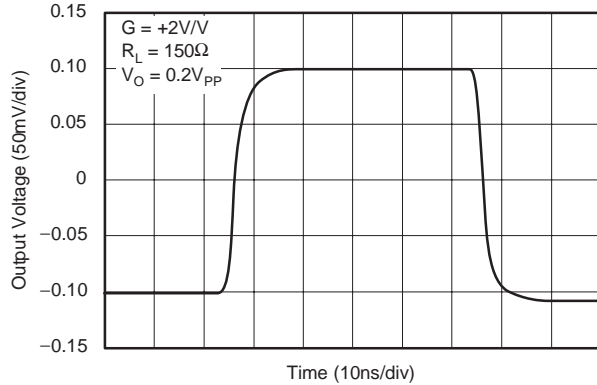

LARGE-SIGNAL PULSE RESPONSE





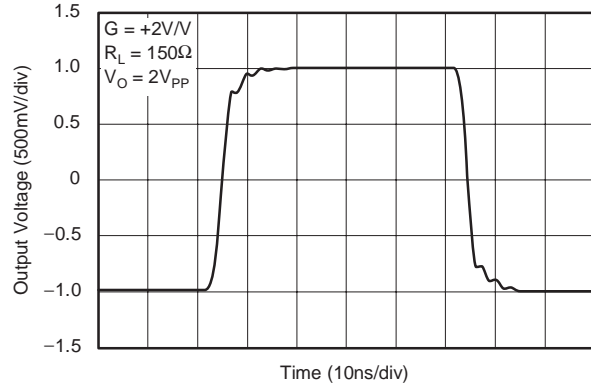
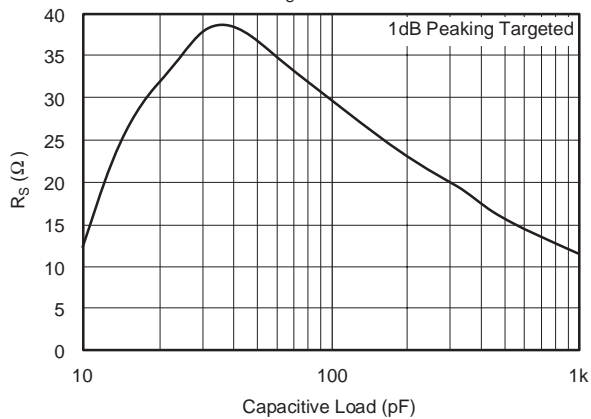
REQUIRED R_S vs CAPACITIVE LOAD

FREQUENCY RESPONSE vs CAPACITIVE LOAD






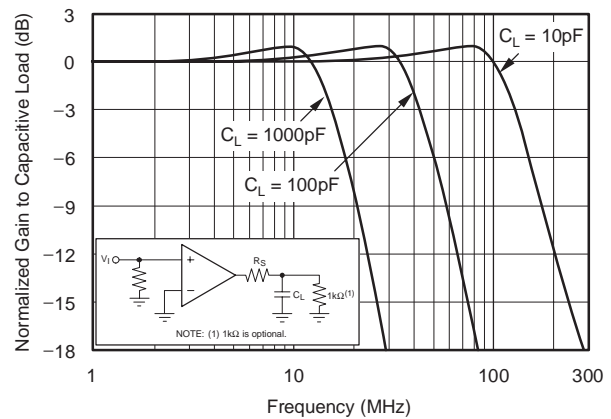


TYPICAL CHARACTERISTICS: $V_S = +5V$ (continued)

At $T_A = 25^\circ C$, $G = +2$, and $R_L = 150\Omega$ to $V_{CM} = 2V$, unless otherwise noted (see Figure 1).

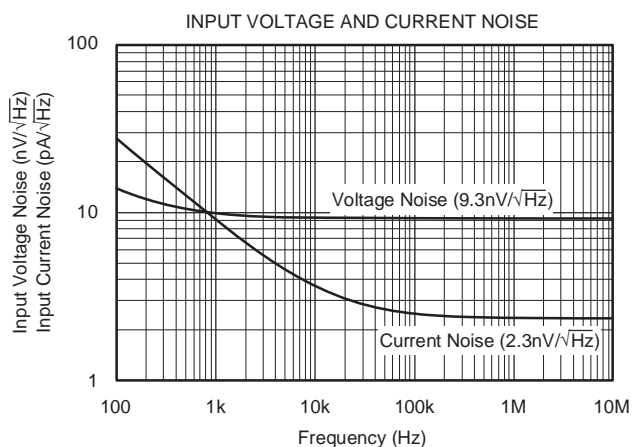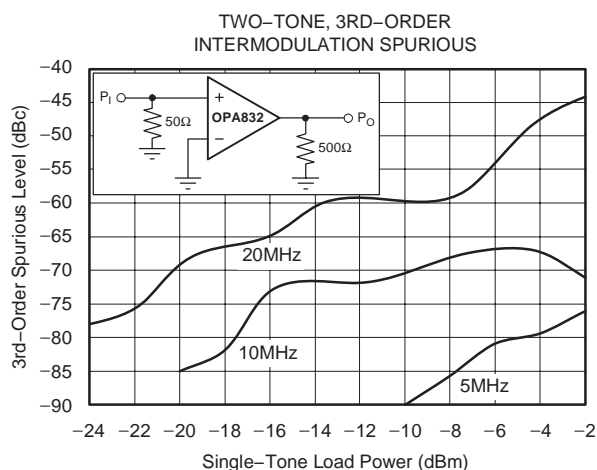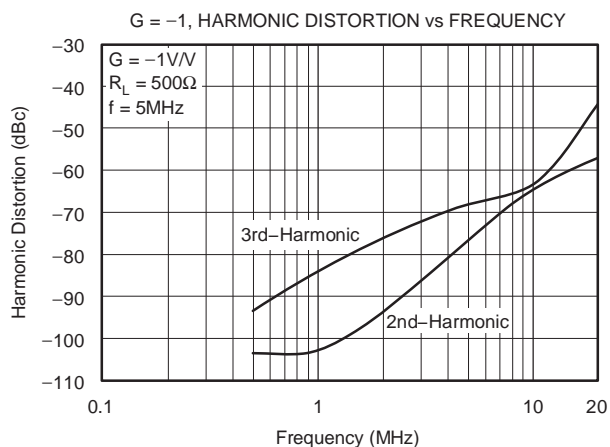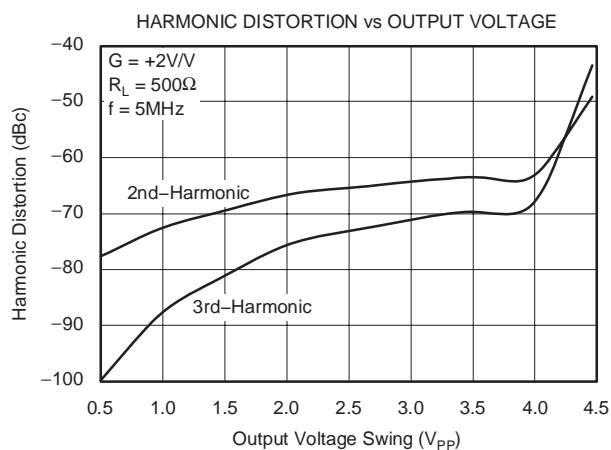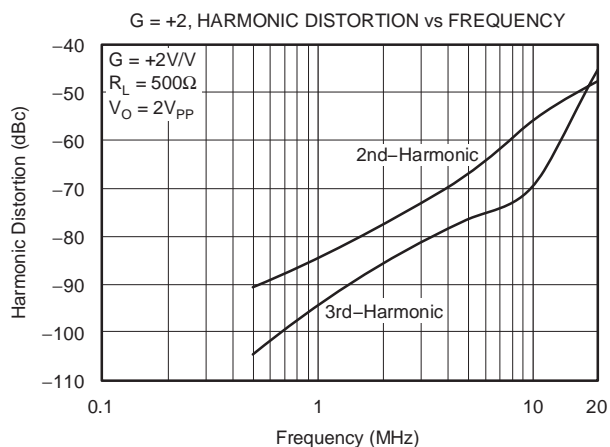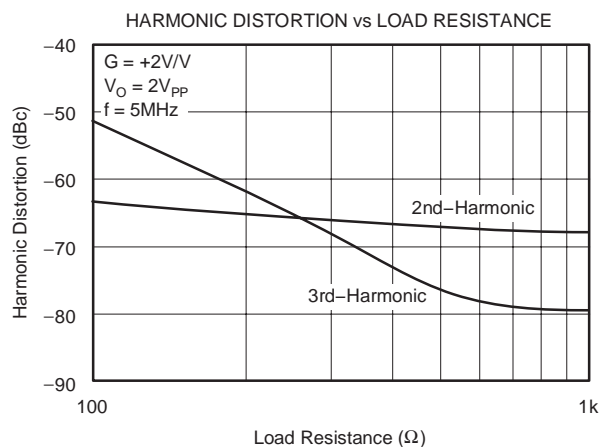


SBOS266D – JUNE 2003 – REVISED MARCH 2006

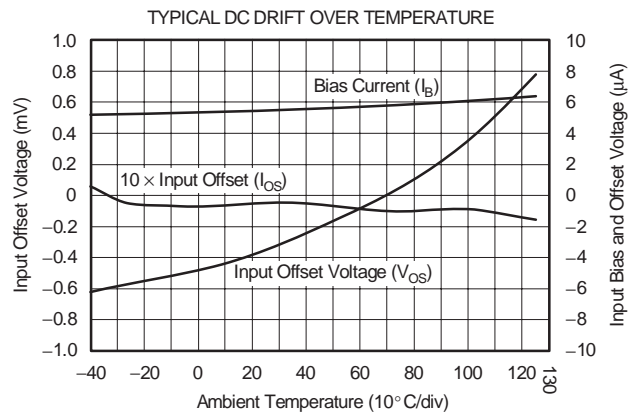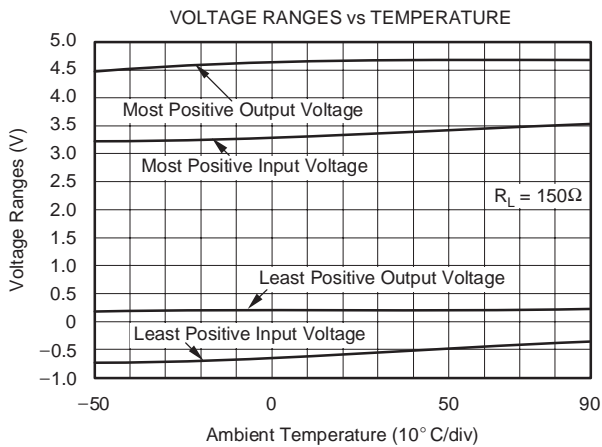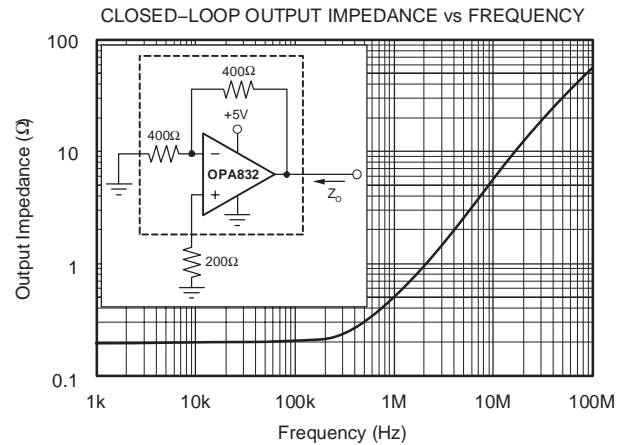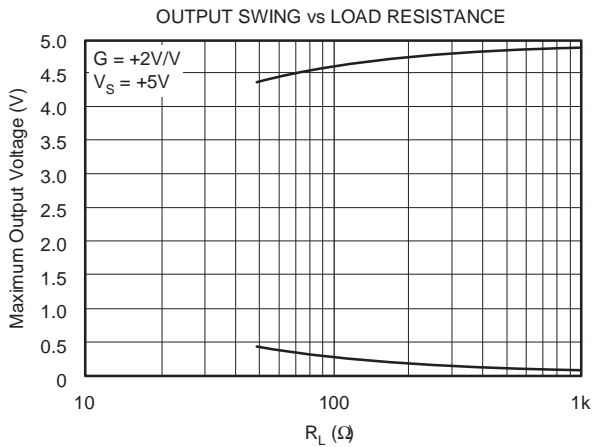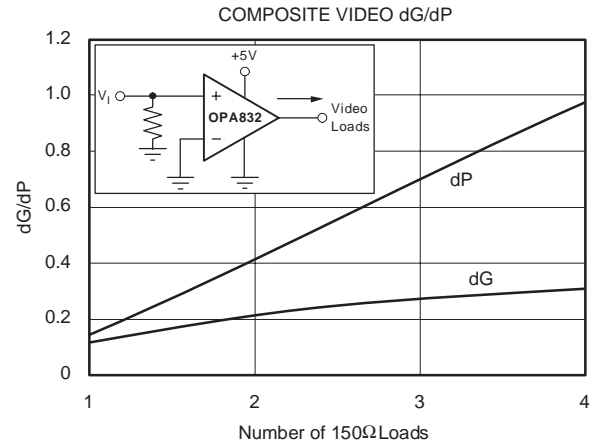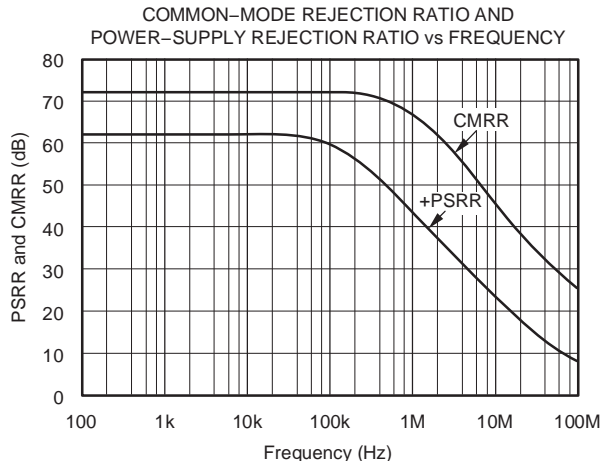TYPICAL CHARACTERISTICS: $V_S = +5V$ (continued)At $T_A = 25^\circ\text{C}$, $G = +2$, and $R_L = 150\Omega$ to $V_{CM} = 2V$, unless otherwise noted (see Figure 1).

TYPICAL CHARACTERISTICS: $V_S = +5V$ (continued)


At $T_A = 25^\circ\text{C}$, $G = +2$, and $R_L = 150\Omega$ to $V_{CM} = 2V$, unless otherwise noted (see Figure 1).

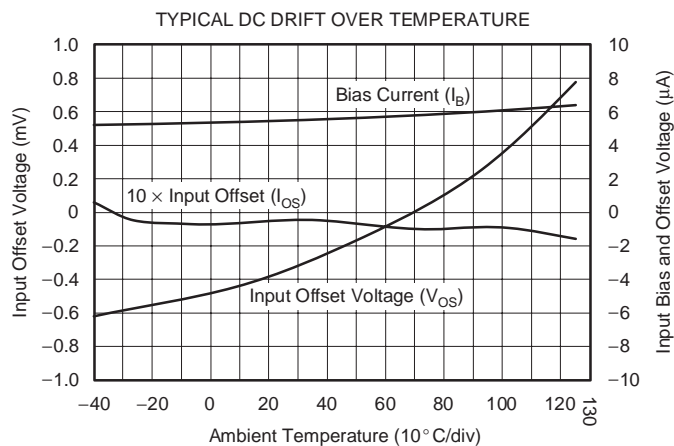


SBOS266D – JUNE 2003 – REVISED MARCH 2006

TYPICAL CHARACTERISTICS: $V_S = +3.3V$ At $T_A = 25^\circ\text{C}$, $G = +2$, and $R_L = 150\Omega$ to $V_{CM} = 0.75V$, unless otherwise noted (see Figure 2).


SMALL-SIGNAL FREQUENCY RESPONSE

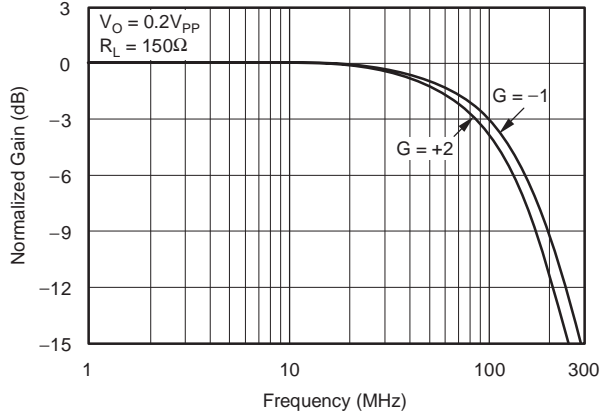



LARGE-SIGNAL FREQUENCY RESPONSE

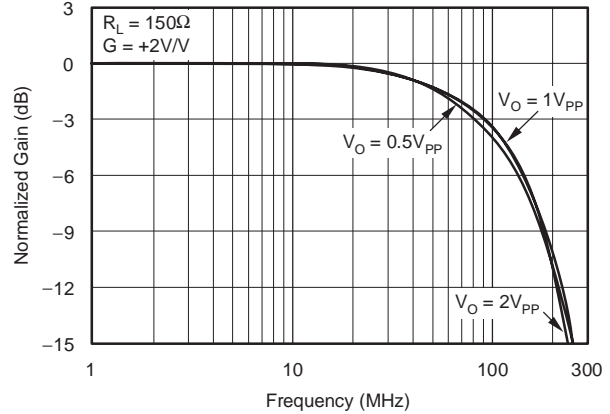


SMALL-SIGNAL PULSE RESPONSE

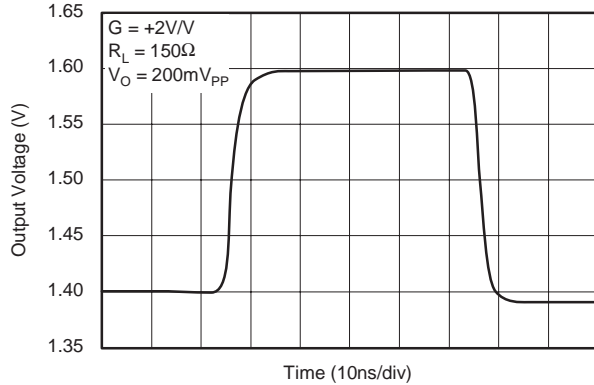

LARGE-SIGNAL PULSE RESPONSE




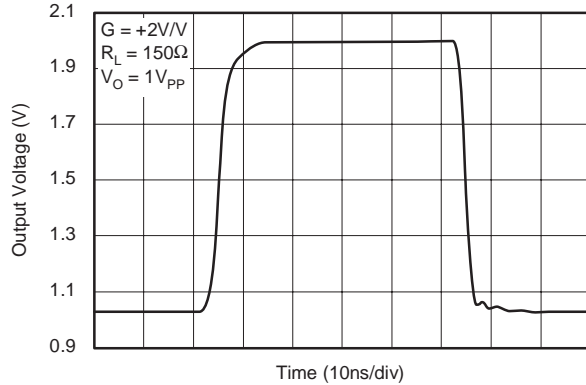
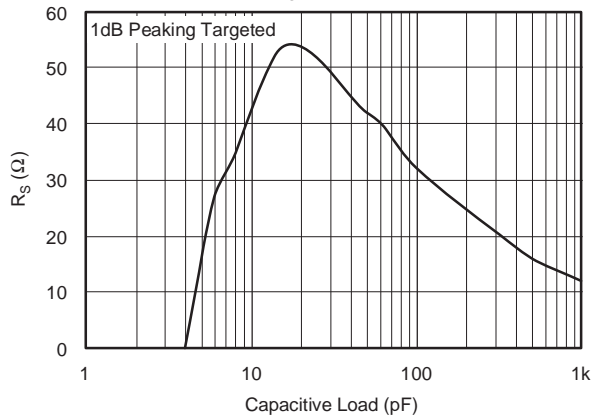
REQUIRED R_S vs CAPACITIVE LOAD

FREQUENCY RESPONSE vs CAPACITIVE LOAD

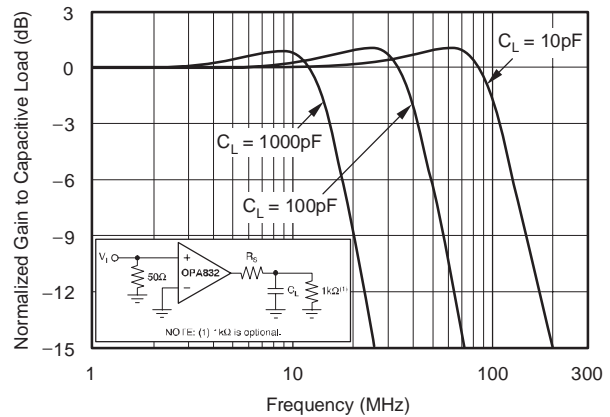

TYPICAL CHARACTERISTICS: $V_S = +3.3V$ (continued)

At $T_A = 25^\circ C$, $G = +2$, and $R_L = 150\Omega$ to $V_{CM} = 0.75V$, unless otherwise noted (see Figure 2).

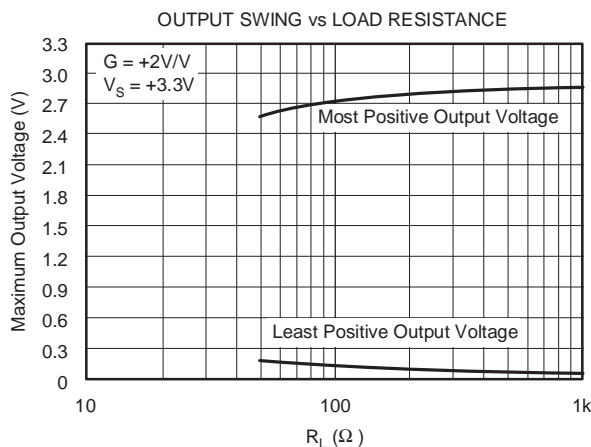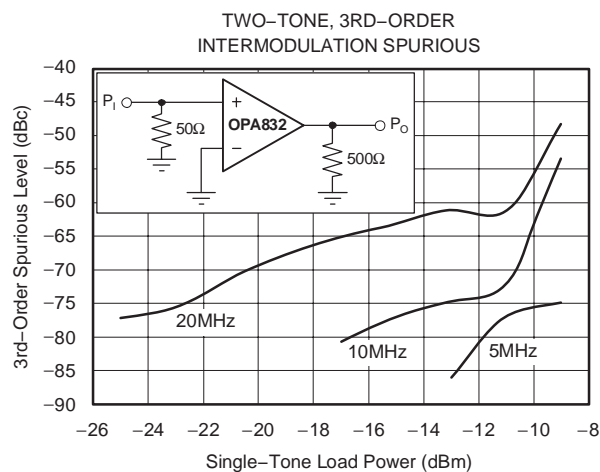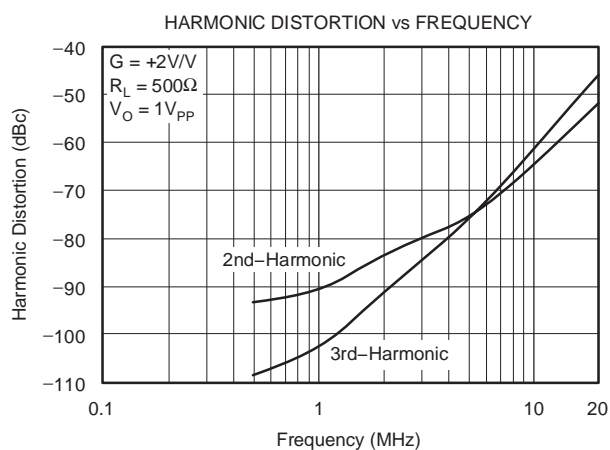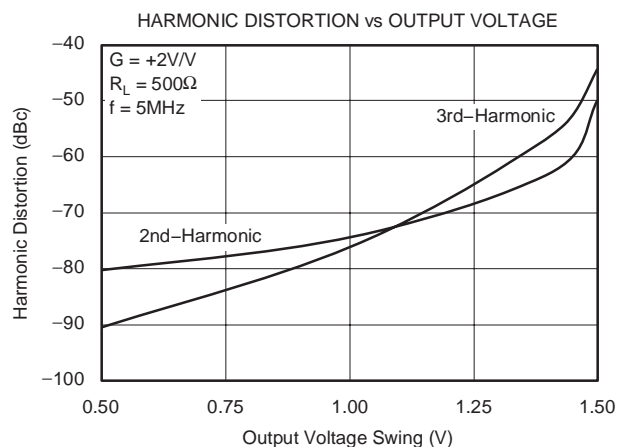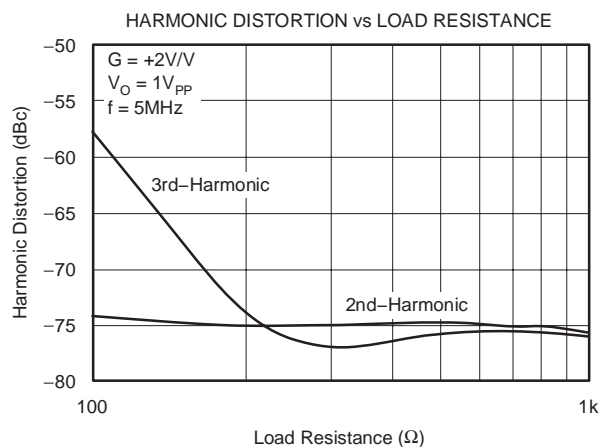

APPLICATIONS INFORMATION

WIDEBAND VOLTAGE-FEEDBACK OPERATION

The OPA832 is a fixed-gain, high-speed, voltage-feedback op amp designed for single-supply operation (+3V to +10V). It features internal R_F and R_G resistors which make it easy to select a gain of +2, +1, and –1 without external resistors. The input stage supports input voltages below ground and to within 1.7V of the positive supply. The complementary common-emitter output stage provides an output swing to within 25mV of either supply pin. The OPA832 is compensated to provide stable operation with a wide range of resistive loads.

Figure 1 shows the AC-coupled, gain of +2 configuration used for the +5V Specifications and Typical Characteristic Curves. The input impedance matching resistor (66.5 Ω) used for testing is adjusted to give a 50 Ω input match when the parallel combination of the biasing divider network is included. Voltage swings reported in the Electrical Characteristics are taken directly at the input and output pins. For the circuit of Figure 1, the total effective load on the output at high frequencies is 150 Ω || 800 Ω . The 332 Ω and 499 Ω resistors at the noninverting input provide the common-mode bias voltage. Their parallel combination equals the DC resistance at the inverting input (R_F || R_G), reducing the DC output offset due to input bias current.

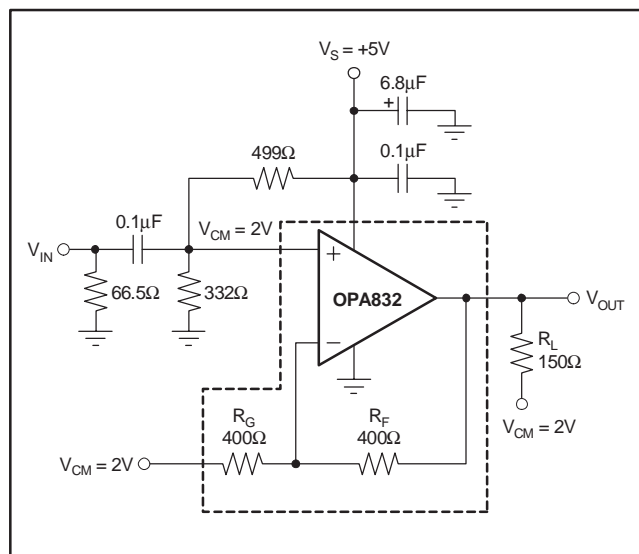


Figure 1. AC-Coupled, G = +2, +5V Single-Supply Specification and Test Circuit

Figure 2 shows the AC-coupled, gain of +2 configuration used for the +3.3V Specifications and Typical Characteristic Curves. The input impedance matching resistor (66.5 Ω) used for testing is adjusted to give a 50 Ω input match when the parallel combination of the biasing divider network is included. Voltage swings reported in the

Electrical Characteristics are taken directly at the input and output pins. For the circuit of Figure 2, the total effective load on the output at high frequencies is 150 Ω || 800 Ω . The 887 Ω and 258 Ω resistors at the noninverting input provide the common-mode bias voltage. Their parallel combination equals the DC resistance at the inverting input (R_F || R_G), reducing the DC output offset due to input bias current.

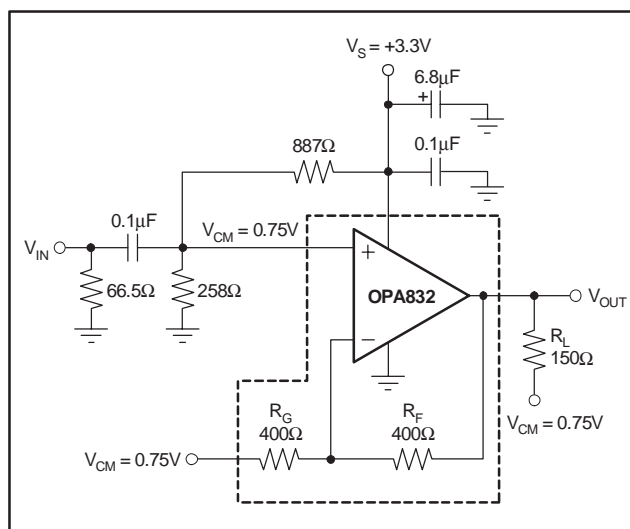


Figure 2. AC-Coupled, G = +2, +3.3V Single-Supply Specification and Test Circuit

Figure 3 shows the DC-coupled, gain of +2, dual power-supply circuit configuration used as the basis of the $\pm 5V$ Electrical Characteristics and Typical Characteristics. For test purposes, the input impedance is set to 50 Ω with a resistor to ground and the output impedance is set to 150 Ω with a series output resistor. Voltage swings reported in the specifications are taken directly at the input and output pins. For the circuit of Figure 3, the total effective load will be 150 Ω || 800 Ω . Two optional components are included in Figure 3. An additional resistor (175 Ω) is included in series with the noninverting input. Combined with the 25 Ω DC source resistance looking back towards the signal generator, this gives an input bias current cancelling resistance that matches the 200 Ω source resistance seen at the inverting input (see the **DC Accuracy and Offset Control** section). In addition to the usual power-supply decoupling capacitors to ground, a 0.01 μF capacitor is included between the two power-supply pins. In practical PC board layouts, this optional capacitor will typically improve the 2nd-harmonic distortion performance by 3dB to 6dB.

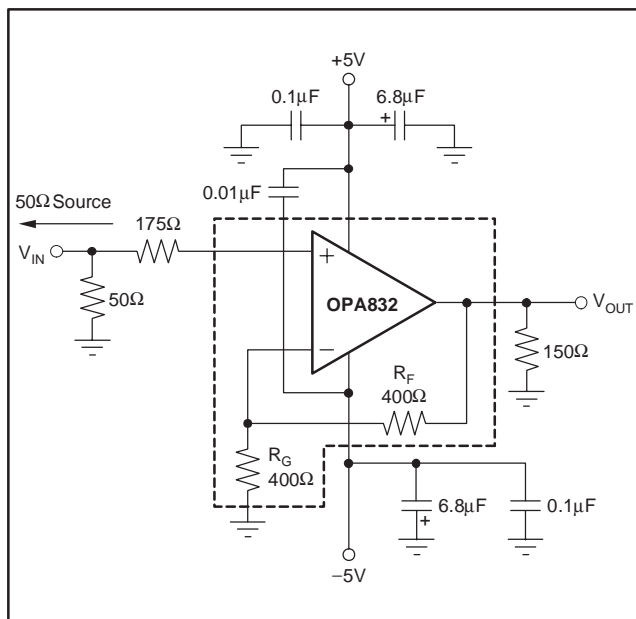


Figure 3. DC-Coupled, $G = +2$, Bipolar Supply Specification and Test Circuit

DESIGN-IN TOOLS

DEMONSTRATION FIXTURES

Two printed circuit boards (PCBs) are available to assist in the initial evaluation of circuit performance using the OPA832 in its two package options. Both of these are offered free of charge as unpopulated PCBs, delivered with a user's guide. The summary information for these fixtures is shown in Table 1.

Table 1. Demonstration Fixtures by Package

| PRODUCT | PACKAGE | ORDERING NUMBER | LITERATURE NUMBER |
|------------|---------|-----------------|-------------------|
| OPA832ID | SO-8 | DEM-OPA-SO-1A | SBOU009 |
| OPA832IDBV | SOT23-5 | DEM-OPA-SOT-1A | SBOU010 |

The demonstration fixtures can be requested at the Texas Instruments web site (www.ti.com) through the OPA832 product folder.

MACROMODEL AND APPLICATIONS SUPPORT

Computer simulation of circuit performance using SPICE is often a quick way to analyze the performance of the OPA832 and its circuit designs. This is particularly true for video and RF amplifier circuits where parasitic capacitance and inductance can play a major role on circuit performance. A SPICE model for the OPA832 is available through the TI web page (www.ti.com). The applications group is also available for design assistance.

These models predict typical small signal AC, transient steps, DC performance, and noise under a wide variety of operating conditions. The models include the noise terms found in the electrical specifications of the data sheet. These models do not attempt to distinguish between the package types in their small-signal AC performance.

GAIN OF +2V/V VIDEO LINE DRIVER

One of the most suitable applications for the OPA832 is a simple gain of +2 video line driver. Figure 4 shows how simple this circuit is to implement, shown as a $\pm 5V$ implementation. Single +5V operation is similar with blocking caps and DC common-mode biasing provided.

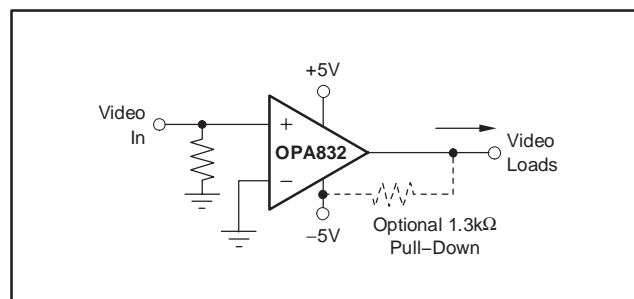


Figure 4. Gain of +2V/V Video Line Driver

One optional element is shown in Figure 4. A 1.3kΩ pull-down to the negative supply will improve the differential phase significantly and the differential gain slightly. Figure 5 shows measured dG/dP with and without that pull-down resistor from 1 to 4 video loads.

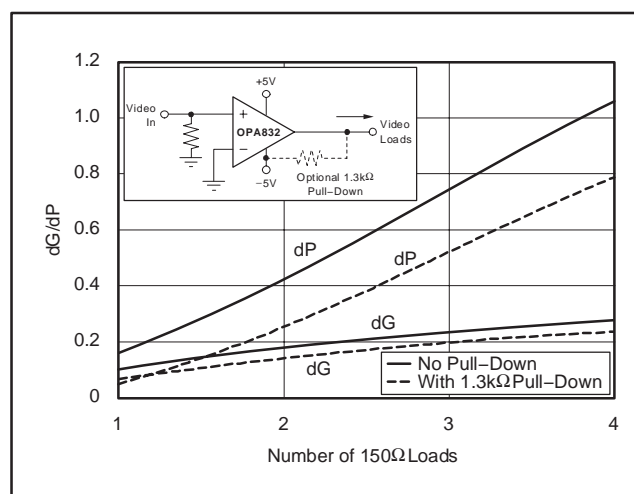


Figure 5. dG/dP vs Video Loads

SINGLE-SUPPLY ADC INTERFACE

The circuit shown in Figure 6 uses the OPA832 as a differential driver followed by an RC filter. In this circuit, the single-ended to differential conversion is realized by a 1:1 transformer driving the noninverting inputs of the two OPA832s. The common-mode level (CML) of the ADS5203 is reduced to the appropriate input level of 0.885V by the network divider composed of R_1 and the

CML output impedance, and connected to the transformer center tap, biasing the OPA832s. This input bias voltage is then amplified to provide the correct common-mode voltage to the input of the ADC. Using only 25.1mW power ($3.8\text{mA} \times 2 \text{ amplifiers} \times 3.3\text{V}$), this configuration (amplifier + ADC) provides greater than 59dB SNR and 70dB SFDR to 2MHz, with all the components running on a low +3.3V supply.

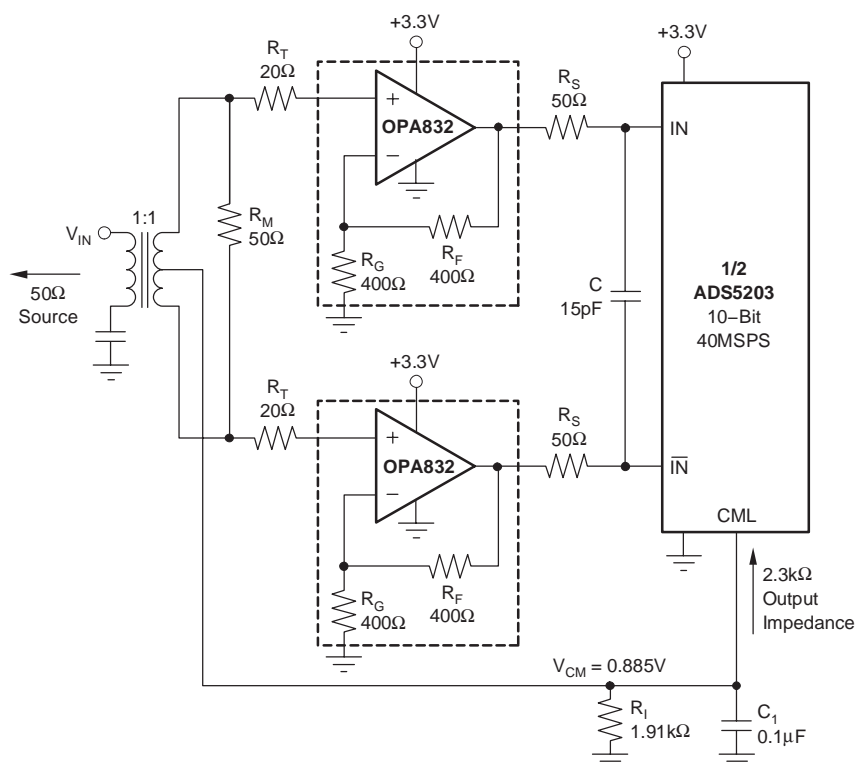


Figure 6. Low-Power, Single-Supply ADC Driver

This circuit removes the peaking by bootstrapping out any parasitic effects on R_G . The input impedance is still set by R_M as the apparent impedance looking into R_G is very high. R_M may be increased to show a higher input impedance, but larger values will start to impact DC output offset voltage. This circuit creates an additional input offset voltage as the difference in the two input bias current times the impedance to ground at V_{IN} . Figure 8 shows a comparison of small-signal frequency response for the unity-gain buffer of Figure 2 (with V_{CM} removed from R_G) compared to the improved approach shown in Figure 7.

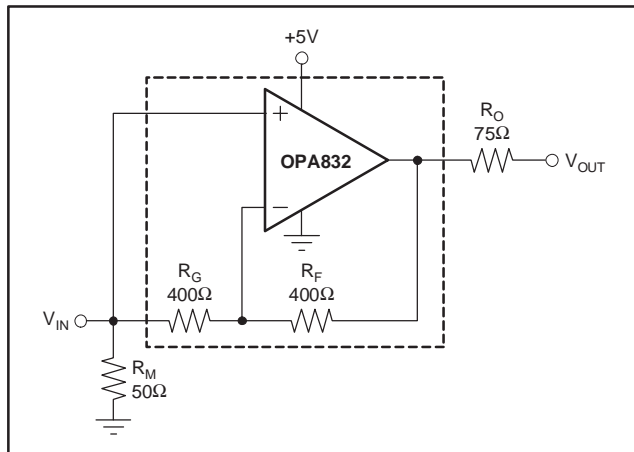


Figure 7. Improved Unity-Gain Buffer

UNITY-GAIN BUFFER

This buffer can simply be realized by not connecting R_G to ground. This type of realization shows a peaking in the frequency response. A similar circuit that holds a flat frequency response giving improved pulse fidelity is shown in Figure 7.

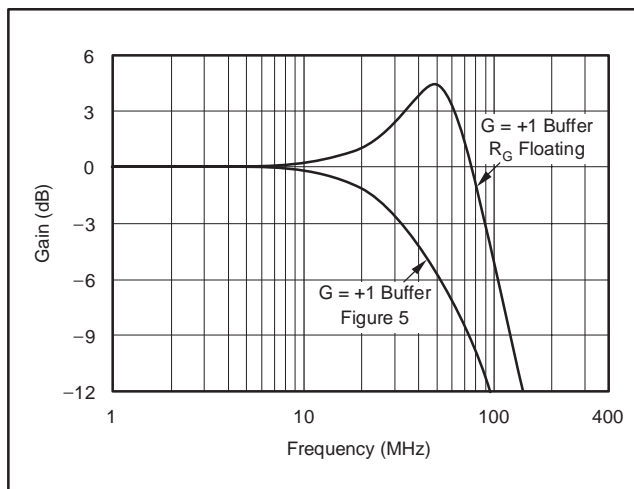


Figure 8. Buffer Frequency Response Comparison

OPERATING SUGGESTIONS

GAIN SETTING

Setting the gain for the OPA832 is very easy. For a gain of +2, ground the $-IN$ pin and drive the $+IN$ pin with the signal. For a gain of +1, either leave the $-IN$ pin open and drive the $+IN$ pin or drive both the $+IN$ and $-IN$ pins as shown in Figure 7. For a gain of -1 , ground the $+IN$ pin and drive the $-IN$ pin with the input signal. An external resistor may be used in series with the $-IN$ pin to reduce the gain. However, since the internal resistors (R_F and R_G) have a tolerance and temperature drift different than the external resistor, the absolute gain accuracy and gain drift over temperature will be relatively poor compared to the previously described standard gain connections using no external resistor.

OUTPUT CURRENT AND VOLTAGES

The OPA832 provides outstanding output voltage capability. For the +5V supply, under no-load conditions at +25°C, the output voltage typically swings closer than 60mV to either supply rail.

The minimum specified output voltage and current specifications over temperature are set by worst-case simulations at the cold temperature extreme. Only at cold startup will the output current and voltage decrease to the numbers shown in the min/max tables. As the output transistors deliver power, their junction temperatures will increase, decreasing their V_{BES} (increasing the available output voltage swing) and increasing their current gains (increasing the available output current). In steady-state operation, the available output voltage and current will always be greater than that shown in the over-temperature specifications, since the output stage junction temperatures will be higher than the minimum specified operating ambient.

To maintain maximum output stage linearity, no output short-circuit protection is provided. This will not normally be a problem, since most applications include a series matching resistor at the output that will limit the internal power dissipation if the output side of this resistor is shorted to ground. However, shorting the output pin directly to the adjacent positive power-supply pin (8-pin packages) will possibly destroy the amplifier. If additional short-circuit protection is required, consider a small series resistor in the power-supply leads. This will reduce the available output voltage swing under heavy output loads.

DRIVING CAPACITIVE LOADS

One of the most demanding and yet very common load conditions for an op amp is capacitive loading. Often, the capacitive load is the input of an ADC—including additional external capacitance which may be recommended to improve ADC linearity. A high-speed, high open-loop gain amplifier like the OPA832 can be very susceptible to decreased stability and closed-loop response peaking when a capacitive load is placed directly on the output pin. When the primary considerations are frequency response flatness, pulse response fidelity,

and/or distortion, the simplest and most effective solution is to isolate the capacitive load from the feedback loop by inserting a series isolation resistor between the amplifier output and the capacitive load.

The Typical Characteristic curves show the recommended R_S versus capacitive load and the resulting frequency response at the load. Parasitic capacitive loads greater than 2pF can begin to degrade the performance of the OPA832. Long PC board traces, unmatched cables, and connections to multiple devices can easily exceed this value. Always consider this effect carefully, and add the recommended series resistor as close as possible to the output pin (see the **Board Layout Guidelines** section).

The criterion for setting this R_S resistor is a 1dB peaked frequency response at the load. Increasing the noise gain will also reduce the peaking (see Figure 7).

DISTORTION PERFORMANCE

The OPA832 provides good distortion performance into a 150Ω load. Relative to alternative solutions, it provides exceptional performance into lighter loads and/or operating on a single +3.3V supply. Generally, until the fundamental signal reaches very high frequency or power levels, the 2nd-harmonic will dominate the distortion with a negligible 3rd-harmonic component. Focusing then on the 2nd-harmonic, increasing the load impedance improves distortion directly. Remember that the total load includes the feedback network; in the noninverting configuration (see Figure 3) this is sum of $R_F + R_G$, while in the inverting configuration, only R_F needs to be included in parallel with the actual load.

Figure 9 shows the 2nd- and 3rd-harmonic distortion versus supply voltage. In order to maintain the input signal within acceptable operating range, the input common-mode voltage is adjusted for each supply voltage. For example, the common-mode voltage is +2V for a single +5V supply, and the distortion is –66.5dBc for the 2nd-harmonic and –74.6dBc for the 3rd-harmonic.

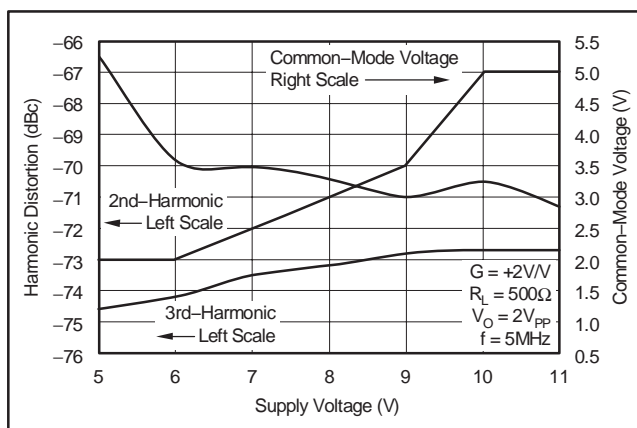


Figure 9. 5MHz Harmonic Distortion vs Supply Voltage

NOISE PERFORMANCE

Unity-gain stable, rail-to-rail (RR) output, voltage-feed-back op amps usually show a higher input noise voltage. The 9.2nV/√Hz input voltage noise for the OPA832 however, is much lower than comparable amplifiers. The input-referred voltage noise and the two input-referred current noise terms (2.8pA/√Hz) combine to give low output noise under a wide variety of operating conditions. Figure 10 shows the op amp noise analysis model with all the noise terms included. In this model, all noise terms are taken to be noise voltage or current density terms in either nV/√Hz or pA/√Hz.

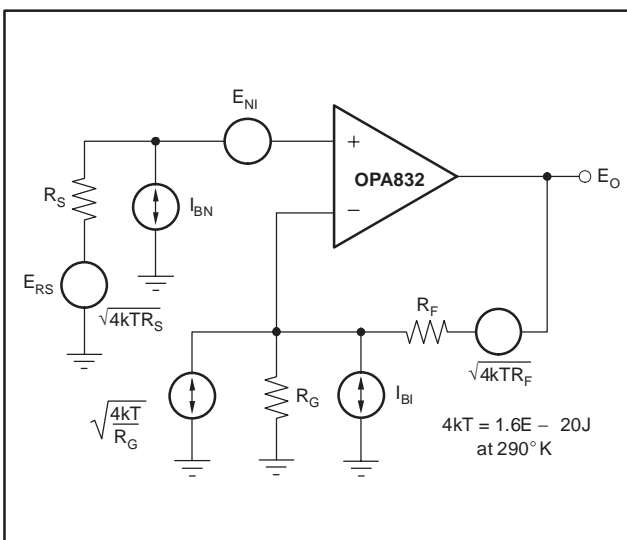


Figure 10. Noise Analysis Model

The total output spot noise voltage can be computed as the square root of the sum of all squared output noise voltage contributors. Equation 1 shows the general form for the output noise voltage using the terms shown in Figure 10:

$$E_O = \sqrt{\left(E_{NI}^2 + (I_{BN}R_S)^2 + 4kTR_S\right)NG^2 + (I_{BI}R_F)^2 + 4kTR_FNG} \quad (1)$$

Dividing this expression by the noise gain ($NG = (1 + R_F/R_G)$) will give the equivalent input-referred spot noise voltage at the noninverting input, as shown in Equation 2:

$$E_N = \sqrt{E_{NI}^2 + (I_{BN}R_S)^2 + 4kTR_S + \left(\frac{I_{BI}R_F}{NG}\right)^2 + \frac{4kTR_F}{NG}} \quad (2)$$

Evaluating these two equations for the circuit and component values shown in Figure 1 will give a total output spot noise voltage of 19.3nV/√Hz and a total equivalent input spot noise voltage of 9.65nV/√Hz. This is including the noise added by the resistors. This total input-referred spot noise voltage is not much higher than the 9.2nV/√Hz specification for the op amp voltage noise alone.

DC ACCURACY AND OFFSET CONTROL

The balanced input stage of a wideband voltage-feedback op amp allows good output DC accuracy in a wide variety of applications. The power-supply current trim for the OPA832 gives even tighter control than comparable products. Although the high-speed input stage does require relatively high input bias current (typically 5μA out of each input terminal), the close matching between them may be used to reduce the output DC error caused by this current. This is done by matching the DC source resistances appearing at the two inputs. Evaluating the configuration of Figure 3 (which has matched DC input resistances), using worst-case +25°C input offset voltage and current specifications, gives a worst-case output offset voltage equal to:

$$\begin{aligned} &(\text{NG} = \text{noninverting signal gain at DC}) \\ &\pm(\text{NG} \times \text{V}_{\text{OS}(\text{MAX})}) \pm (\text{R}_{\text{F}} \times \text{I}_{\text{OS}(\text{MAX})}) \\ &= \pm(2 \times 10\text{mV}) \pm (400\Omega \times 1.5\mu\text{A}) \\ &= \pm 10.6\text{mV} \end{aligned}$$

A fine-scale output offset null, or DC operating point adjustment, is often required. Numerous techniques are available for introducing DC offset control into an op amp circuit. Most of these techniques are based on adding a DC current through the feedback resistor. In selecting an offset trim method, one key consideration is the impact on the desired signal path frequency response. If the signal path is intended to be noninverting, the offset control is best applied as an inverting summing signal to avoid interaction with the signal source. If the signal path is intended to be inverting, applying the offset control to the noninverting input may be considered. Bring the DC offsetting current into the inverting input node through resistor values that are much larger than the signal path resistors. This will insure that the adjustment circuit has minimal effect on the loop gain and hence the frequency response.

THERMAL ANALYSIS

Maximum desired junction temperature will set the maximum allowed internal power dissipation, as described below. In no case should the maximum junction temperature be allowed to exceed 150°C.

Operating junction temperature (T_J) is given by $T_A + P_D \times \theta_{JA}$. The total internal power dissipation (P_D) is the sum of quiescent power (P_{DQ}) and additional power dissipated in the output stage (P_{DL}) to deliver load power. Quiescent power is simply the specified no-load supply current times the total supply voltage across the part. P_{DL} will depend on the required output signal and load; though, for resistive loads connected to mid-supply ($V_S/2$), P_{DL} is at a maximum when the output is fixed at a voltage equal to $V_S/4$ or $3V_S/4$. Under this condition, $P_{DL} = V_S^2/(16 \times R_L)$, where R_L includes feedback network loading.

Note that it is the power in the output stage, and not into the load, that determines internal power dissipation.

As a worst-case example, compute the maximum T_J using an OPA832 (SOT23-5 package) in the circuit of Figure 3 operating at the maximum specified ambient temperature of +85°C and driving a 150Ω load at mid-supply.

$$P_D = 10\text{V} \times 3.9\text{mA} + 5^2/(16 \times (150\Omega \parallel 400\Omega)) = 53.3\text{mW}$$

$$\text{Maximum } T_J = +85^\circ\text{C} + (0.053\text{W} \times 150^\circ\text{C/W}) = 93^\circ\text{C}.$$

Although this is still well below the specified maximum junction temperature, system reliability considerations may require lower ensured junction temperatures. The highest possible internal dissipation will occur if the load requires current to be forced into the output at high output voltages or sourced from the output at low output voltages. This puts a high current through a large internal voltage drop in the output transistors.

BOARD LAYOUT GUIDELINES

Achieving optimum performance with a high-frequency amplifier like the OPA832 requires careful attention to board layout parasitics and external component types. Recommendations that will optimize performance include:

a) Minimize parasitic capacitance to any AC ground for all of the signal I/O pins. Parasitic capacitance on the output and inverting input pins can cause instability: on the noninverting input, it can react with the source impedance to cause unintentional bandlimiting. To reduce unwanted capacitance, a window around the signal I/O pins should be opened in all of the ground and power planes around those pins. Otherwise, ground and power planes should be unbroken elsewhere on the board.

b) Minimize the distance ($< 0.25''$) from the power-supply pins to high-frequency 0.1μF decoupling capacitors. At the device pins, the ground and power-plane layout should not be in close proximity to the signal I/O pins. Avoid narrow power and ground traces to minimize inductance between the pins and the decoupling capacitors. Each power-supply connection should always be decoupled with one of these capacitors. An optional supply decoupling capacitor (0.1μF) across the two power supplies (for bipolar operation) will improve 2nd-harmonic distortion performance. Larger (2.2μF to 6.8μF) decoupling capacitors, effective at lower frequency, should also be used on the main supply pins. These may be placed somewhat farther from the device and may be shared among several devices in the same area of the PC board.

c) Careful selection and placement of external components will preserve the high-frequency performance. Resistors should be a very low reactance type. Surface-mount resistors work best and allow a tighter overall layout. Metal film or carbon composition axially-leaded resistors can also provide good high-frequency performance. Again, keep their leads and PC

board traces as short as possible. Never use wire-wound type resistors in a high-frequency application. Since the output pin is the most sensitive to parasitic capacitance, always position the series output resistor, if any, as close as possible to the output pin. Other network components, such as noninverting input termination resistors, should also be placed close to the package.

d) Connections to other wideband devices on the board may be made with short direct traces or through onboard transmission lines. For short connections, consider the trace and the input to the next device as a lumped capacitive load. Relatively wide traces (50mils to 100mils) should be used, preferably with ground and power planes opened up around them. Estimate the total capacitive load and set R_S from the typical characteristic curve *Recommended R_S vs Capacitive Load*. Low parasitic capacitive loads ($< 5\text{pF}$) may not need an R_S since the OPA832 is nominally compensated to operate with a 2pF parasitic load. Higher parasitic capacitive loads without an R_S are allowed as the signal gain increases (increasing the unloaded phase margin). If a long trace is required, and the 6dB signal loss intrinsic to a doubly-terminated transmission line is acceptable, implement a matched impedance transmission line using microstrip or stripline techniques (consult an ECL design handbook for microstrip and stripline layout techniques). A 50Ω environment is normally not necessary onboard, and in fact, a higher impedance environment will improve distortion as shown in the distortion versus load plots. With a characteristic board trace impedance defined (based on board material and trace dimensions), a matching series resistor into the trace from the output of the OPA832 is used as well as a terminating shunt resistor at the input of the destination device. Remember also that the terminating impedance will be the parallel combination of the shunt resistor and the input impedance of the destination device; this total effective impedance should be set to match the trace impedance. If the 6dB attenuation of a doubly-terminated transmission line is unacceptable, a long trace can be series-terminated at the source end only. Treat the trace as a capacitive load in this case and set the series resistor value as shown in the typical characteristic curve *Recommended R_S vs Capacitive Load*. This will not preserve signal integrity as well as a doubly-terminated line. If the input impedance of the destination device is low, there will be some signal attenuation due to the voltage divider formed by the series output into the terminating impedance.

e) Socketing a high-speed part is not recommended. The additional lead length and pin-to-pin capacitance introduced by the socket can create an extremely troublesome parasitic network which can make it almost impossible to achieve a smooth, stable frequency response. Best results are obtained by soldering the OPA832 onto the board.

INPUT AND ESD PROTECTION

The OPA832 is built using a very high-speed complementary bipolar process. The internal junction breakdown voltages are relatively low for these very small geometry devices. These breakdowns are reflected in the **Absolute Maximum Ratings** table. All device pins are protected with internal ESD protection diodes to the power supplies, as shown in Figure 11.

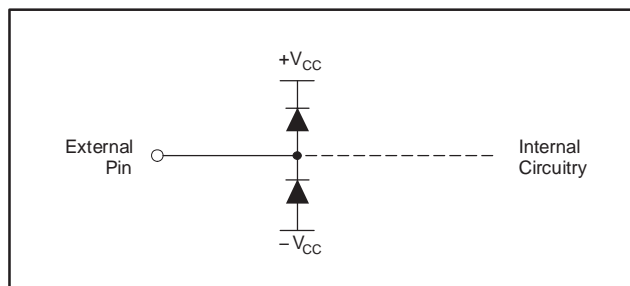


Figure 11. Internal ESD Protection

These diodes provide moderate protection to input overdrive voltages above the supplies as well. The protection diodes can typically support 30mA continuous current. Where higher currents are possible (that is, in systems with $\pm 15\text{V}$ supply parts driving into the OPA832), current-limiting series resistors should be added into the two inputs. Keep these resistor values as low as possible, since high values degrade both noise performance and frequency response.

Revision History

| DATE | REV | PAGE | SECTION | DESCRIPTION |
|---------|-----|------|-----------------|----------------------------|
| 3/24/06 | D | 15 | Design-In Tools | Board part number changed. |

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

PACKAGING INFORMATION

| Orderable Device | Status ⁽¹⁾ | Package Type | Package Drawing | Pins | Package Qty | Eco Plan ⁽²⁾ | Lead/Ball Finish | MSL Peak Temp ⁽³⁾ |
|------------------|-----------------------|--------------|-----------------|------|-------------|-------------------------|------------------|------------------------------|
| OPA832ID | ACTIVE | SOIC | D | 8 | 100 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR |
| OPA832IDBVR | ACTIVE | SOT-23 | DBV | 5 | 3000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM |
| OPA832IDBVRG4 | ACTIVE | SOT-23 | DBV | 5 | 3000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM |
| OPA832IDBVT | ACTIVE | SOT-23 | DBV | 5 | 250 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM |
| OPA832IDBVTG4 | ACTIVE | SOT-23 | DBV | 5 | 250 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM |
| OPA832IDG4 | ACTIVE | SOIC | D | 8 | 100 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR |
| OPA832IDR | ACTIVE | SOIC | D | 8 | 2500 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR |
| OPA832IDRG4 | ACTIVE | SOIC | D | 8 | 2500 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR |

⁽¹⁾ The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSELETE: TI has discontinued the production of the device.

⁽²⁾ Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

⁽³⁾ MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION



*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| OPA832IDBVR | SOT-23 | DBV | 5 | 3000 | 180.0 | 8.4 | 3.2 | 3.1 | 1.39 | 4.0 | 8.0 | Q3 |
| OPA832IDBVT | SOT-23 | DBV | 5 | 250 | 180.0 | 8.4 | 3.2 | 3.1 | 1.39 | 4.0 | 8.0 | Q3 |
| OPA832IDR | SOIC | D | 8 | 2500 | 330.0 | 12.4 | 6.4 | 5.2 | 2.1 | 8.0 | 12.0 | Q1 |

TAPE AND REEL BOX DIMENSIONS



*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|-------------|--------------|-----------------|------|------|-------------|------------|-------------|
| OPA832IDBVR | SOT-23 | DBV | 5 | 3000 | 190.5 | 212.7 | 31.8 |
| OPA832IDBVT | SOT-23 | DBV | 5 | 250 | 190.5 | 212.7 | 31.8 |
| OPA832IDR | SOIC | D | 8 | 2500 | 346.0 | 346.0 | 29.0 |

DBV (R-PDSO-G5)


PLASTIC SMALL-OUTLINE PACKAGE



- NOTES:
- All linear dimensions are in millimeters.
 - This drawing is subject to change without notice.
 - Body dimensions do not include mold flash or protrusion. Mold flash and protrusion shall not exceed 0.15 per side.
 - Falls within JEDEC MO-178 Variation AA.

D (R-PDSO-G8)

PLASTIC SMALL-OUTLINE PACKAGE

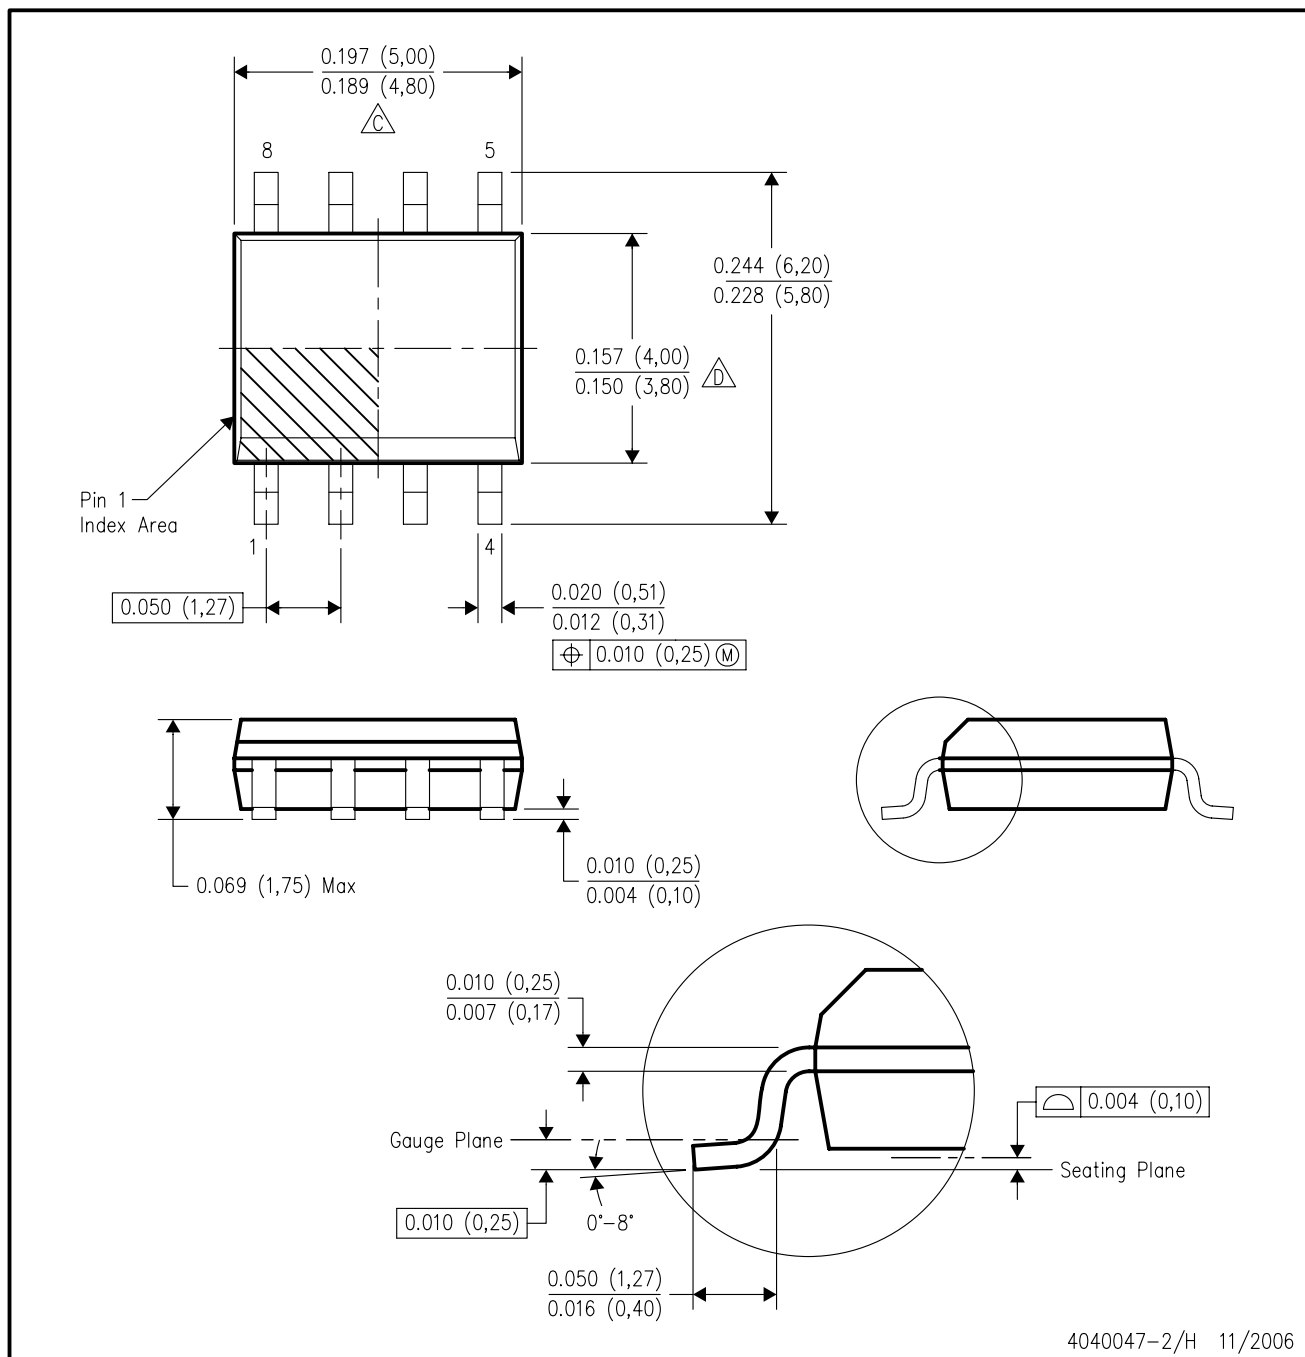

NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 (0,15) per end.
- D. Body width does not include interlead flash. Interlead flash shall not exceed .017 (0,43) per side.
- E. Reference JEDEC MS-012 variation AA.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

| | |
|-----------------------------|--|
| Amplifiers | amplifier.ti.com |
| Data Converters | dataconverter.ti.com |
| DSP | dsp.ti.com |
| Clocks and Timers | www.ti.com/clocks |
| Interface | interface.ti.com |
| Logic | logic.ti.com |
| Power Mgmt | power.ti.com |
| Microcontrollers | microcontroller.ti.com |
| RFID | www.ti-rfid.com |
| RF/IF and ZigBee® Solutions | www.ti.com/lprf |

Applications

| | |
|--------------------|--|
| Audio | www.ti.com/audio |
| Automotive | www.ti.com/automotive |
| Broadband | www.ti.com/broadband |
| Digital Control | www.ti.com/digitalcontrol |
| Medical | www.ti.com/medical |
| Military | www.ti.com/military |
| Optical Networking | www.ti.com/opticalnetwork |
| Security | www.ti.com/security |
| Telephony | www.ti.com/telephony |
| Video & Imaging | www.ti.com/video |
| Wireless | www.ti.com/wireless |

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2008, Texas Instruments Incorporated