

30-A, 5.5-V to 14-V INPUT, NON-ISOLATED, WIDE OUTPUT ADJUST, POWER MODULE w/*TurboTrans*[™] **POLA**[™]

FEATURES

- Up to 30-A Output Current
- 5.5-V to 14-V Input Voltage
- Wide-Output Voltage Adjust (0.7 V to 3.6 V)
- Efficiencies up to 96%
- $\pm 1.5\%$ Total Output Voltage Variation
- On/Off Inhibit
- Differential Output Voltage Remote Sense
- Adjustable Undervoltage Lockout
- Output Overcurrent Protection (Nonlatching, Auto-Reset)
- Operating Temperature: -40°C to 85°C
- POLA[™] Compatible
- TurboTrans[™] Technology
- Designed to meet Ultra-Fast Transient Requirements up to 300 A/ μs
- Auto-Track[™] Sequencing
- Multi-Phase, Switch-Mode Topology
- Safety Agency Approvals:
 - UL/IEC/CSA-22.2 60950-1

APPLICATIONS

- Complex Multi-Voltage Systems
- Microprocessors
- Bus Drivers

DESCRIPTION

The PTH08T210W is a high-performance 30-A rated, non-isolated power module which utilizes a multi-phase, switch-mode topology. This module represents the 2nd generation of the PTH series power modules which include a reduced footprint and improved features.

Operating from an input voltage range of 5.5 V to 14 V, the PTH08T210W requires a single resistor to set the output voltage to any value over the range, 0.7 V to 3.6 V. The wide input voltage range makes the PTH08T210W particularly suitable for advanced computing and server applications that uses a loosely regulated 8-V to 12-V intermediate distribution bus. The module uses double-sided surface mount construction to provide a low profile and compact footprint. Package options include both through-hole and surface mount configurations that are lead (Pb) – free and RoHS compatible.

A new feature included in this 2nd generation of PTH and PTV modules is TurboTrans[™] technology (patent pending). TurboTrans allows the transient response of the regulator to be optimized externally, resulting in a reduction of output voltage deviation following a load transient and a reduction in required output capacitance. This feature also offers enhanced stability when used with ultra-low ESR output capacitors.

The PTH08T210W incorporates a comprehensive list of standard features. They include on/off inhibit, a differential remote output voltage sense which ensures tight load regulation, and an output overcurrent and overtemperature shutdown to protect against load faults. A programmable undervoltage lockout allows the turn-on voltage threshold to be customized. AutoTrack[™] sequencing is a feature which simplifies the simultaneous power-up and power-down of multiple modules in a power system by allowing the outputs to track a common voltage.




Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

POLA, TurboTrans, Auto-Track, AutoTrack, TMS320 are trademarks of Texas Instruments.



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

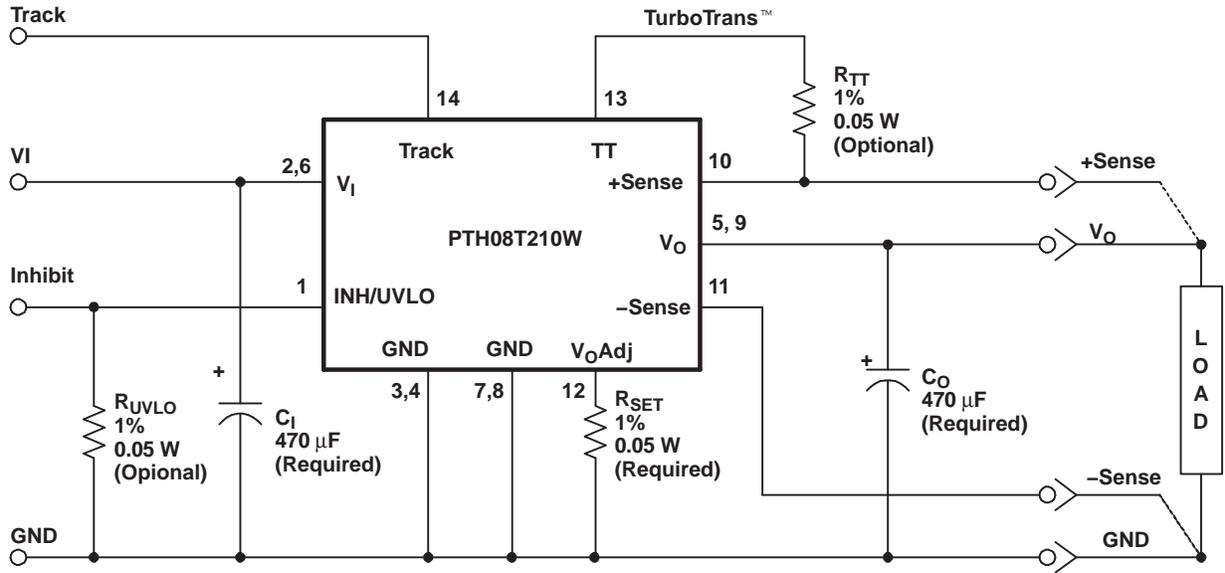

UDG-05097

A. R_{SET} is required to set the output voltage higher than 0.7 V. See the *Electrical Characteristics* table.

ORDERING INFORMATION

For the most current package and ordering information, see the Package Option Addendum at the end of this datasheet, or see the TI website at www.ti.com.

DATASHEET TABLE OF CONTENTS

| DATASHEET SECTION | PAGE NUMBER |
|---|-------------|
| ENVIRONMENTAL AND ABSOLUTE MAXIMUM RATINGS | 3 |
| ELECTRICAL CHARACTERISTICS TABLE (PTH08T210W) | 4 |
| TERMINAL FUNCTIONS | 6 |
| TYPICAL CHARACTERISTICS ($V_I = 12V$) | 7 |
| TYPICAL CHARACTERISTICS ($V_I = 8V$) | 8 |
| INPUT & OUTPUT CAPACITOR RECOMMENDATIONS | 9 |
| TURBOTRANS™ INFORMATION | 13 |
| ADJUSTING THE OUTPUT VOLTAGE | 18 |
| UNDERVOLTAGE LOCKOUT (UVLO) | 20 |
| SOFT-START POWER-UP | 21 |
| REMOTE SENSE | 21 |
| OUTPUT INHIBIT | 22 |
| OVER-CURRENT PROTECTION | 22 |
| OVER-TEMPERATURE PROTECTION | 23 |
| AUTO-TRACK SEQUENCING | 23 |
| TAPE & REEL AND TRAY DRAWINGS | 26 |

ENVIRONMENTAL AND ABSOLUTE MAXIMUM RATINGS

(Voltages are with respect to GND)

| | | | UNIT | UNIT |
|--------------|-----------------------------|---|---------------------|-------|
| | Signal input voltage | Track control (pin 14) | –0.3 to $V_I + 0.3$ | V |
| T_A | Operating temperature range | Over V_I range | –40 to 85 | °C |
| T_{wave} | Wave soldering temperature | Surface temperature of module body or pins (5 second maximum) | 260 | |
| T_{reflow} | Solder reflow temperature | Surface temperature of module body or pins | PTH08T210WAD | |
| | | | PTH08T210WAH | |
| T_{stg} | Storage temperature | Storage temperature of module removed from shipping package | PTH08T210WAS | |
| | | | PTH08T210WAZ | |
| T_{pkg} | Packaging temperature | Shipping Tray or Tape and Reel storage or bake temperature | 45 | G |
| | Mechanical shock | Per Mil-STD-883D, Method 2002.3 1 msec, sine, mounted | 250 | |
| | Mechanical vibration | Mil-STD-883D, Method 2007.2 20-2000 Hz | 15 | |
| | Weight | | 8.5 | |
| | Flammability | Meets UL94V-O | | grams |

(1) During reflow of surface mount package version do not elevate peak temperature of the module, pins or internal components above the stated maximum.

ELECTRICAL CHARACTERISTICS

$T_A = 25^\circ\text{C}$, $V_I = 12\text{ V}$, $V_O = 3.3\text{ V}$, $C_I = 470\text{ }\mu\text{F}$, $C_O = 470\text{ }\mu\text{F OS-CON}$, and $I_O = I_O\text{ max}$ (unless otherwise stated)

| PARAMETER | | TEST CONDITIONS | | MIN | TYP | MAX | UNIT |
|--|---|--|---|--|--------------------|---------------------|------------------|
| I_O | Output current | 25°C, natural convection | | 0 | | 25 | A |
| | | 60°C, 200 LFM | | 0 | | 30 | |
| V_I | Input voltage range | Over I_O range | | 5.5 | | 14 | V |
| V_O | Output adjust range | Over I_O range | | 0.7 | | 3.6 | V |
| | Set-point voltage tolerance | | | | | $\pm 1^{(1)}$ | $\%V_O$ |
| | Temperature variation | $-40^\circ\text{C} < T_A < 85^\circ\text{C}$ | | | ± 0.3 | | $\%V_O$ |
| | Line regulation | Over V_I range | | | ± 4 | | mV |
| | Load regulation | Over I_O range | | | ± 7 | | mV |
| | Total output variation | Includes set-point, line, load, $-40^\circ\text{C} \leq T_A \leq 85^\circ\text{C}$ | | | | $\pm 1.5^{(1)}$ | $\%V_O$ |
| | η | Efficiency | $I_O = 26\text{ A}$ | $R_{SET} = 1.62\text{ k}\Omega$, $V_O = 3.3\text{ V}$ | | 93% | |
| $R_{SET} = 5.23\text{ k}\Omega$, $V_O = 2.5\text{ V}$ | | | | | 91% | | |
| $R_{SET} = 12.7\text{ k}\Omega$, $V_O = 1.8\text{ V}$ | | | | | 89% | | |
| $R_{SET} = 19.6\text{ k}\Omega$, $V_O = 1.5\text{ V}$ | | | | | 89% | | |
| $R_{SET} = 35.7\text{ k}\Omega$, $V_O = 1.2\text{ V}$ | | | | | 87% | | |
| $R_{SET} = 63.4\text{ k}\Omega$, $V_O = 1.0\text{ V}$ | | | | | 84% | | |
| | | | Open, $V_O = 0.7\text{ V}$ | | 80% | | |
| V_O Ripple (peak-to-peak) | | 20-MHz bandwidth | | | 25 | | mV _{pp} |
| I_{LIM} Overcurrent threshold | | Reset, followed by auto-recovery | | | 55 | | A |
| t_{tr} | Transient response | 2.5 A/ μs load step 50 to 100% I_{Omax} | w/o TurboTrans $C_O = 470\mu\text{F}$ | Recovery time | 50 | | μs |
| ΔV_{tr} | | | | V_O over/undershoot | 150 | | mV |
| t_{tr} | | | w/o TurboTrans $C_O = 940\mu\text{F}$, Type C | Recovery time | 50 | | μs |
| ΔV_{tr} | | | | V_O over/undershoot | 125 | | mV |
| t_{trTT} | | | w/ TurboTrans $C_O = 940\mu\text{F}$, Type C | Recovery time | 50 | | μs |
| ΔV_{trTT} | | | | V_O over/undershoot | 85 | | mV |
| I_{IL} | Track input current (pin 14) | Pin to GND | | | | $-130^{(2)}$ | μA |
| dV_{track}/dt | Track slew rate capability | $C_O \leq C_O$ (max) | | | | 1 | V/ms |
| $UVLO_{ADJ}$ | Adjustable Undervoltage lockout (pin 1) | Pin 1 open | V_I increasing | | 5 | 5.5 | V |
| | | | V_I decreasing | | 4.1 | | |
| | Inhibit control (pin 1) | Input high voltage (V_{IH}) | | | | Open ⁽³⁾ | V |
| | | Input low voltage (V_{IL}) | | | -0.2 | 0.6 | |
| | | Input low current (I_{IL}) | | | 125 | | |
| I_{in} | Input standby current | Inhibit (pin 1) to GND, Track (pin 14) open | | | 3 | | mA |
| f_s | Switching frequency | Over V_I and I_O ranges | | | 480 | | kHz |
| C_I | External input capacitance | | | | 470 ⁽⁴⁾ | | μF |


- (1) The set-point voltage tolerance is affected by the tolerance and stability of R_{SET} . The stated limit is unconditionally met if R_{SET} has a tolerance of 1% with 100 ppm/C or better temperature stability.
- (2) A low-leakage (<100 nA), open-drain device, such as MOSFET or voltage supervisor IC, is recommended to control pin 14. The open-circuit voltage is less than 5 Vdc.
- (3) This control pin has an internal pullup. If it is left open-circuit, the module operates when input power is applied. A small, low-leakage (<100 nA) MOSFET is recommended for control. The open-circuit voltage is less than 5 Vdc. For additional information, see the related application note.
- (4) A 470 μF electrolytic input capacitor is required for proper operation. The capacitor must be rated for a minimum of 500 mA rms of ripple current.

ELECTRICAL CHARACTERISTICS (continued)
 $T_A = 25^\circ\text{C}$, $V_I = 12\text{ V}$, $V_O = 3.3\text{ V}$, $C_I = 470\ \mu\text{F}$, $C_O = 470\ \mu\text{F OS-CON}$, and $I_O = I_O\ \text{max}$ (unless otherwise stated)

| PARAMETER | | TEST CONDITIONS | | MIN | TYP | MAX | UNIT | |
|--|-----------------------------|---|---|------------|-----------------------------|-------------------------------------|-----------------------|------------------|
| C_O | External output capacitance | w/out TurboTrans | Capacitance Value | Nonceramic | | 470 ⁽⁵⁾ | 12,000 ⁽⁶⁾ | μF |
| | | | | Ceramic | | | 5000 | |
| | | | Equivalent series resistance (nonceramic) | | | | 3 ⁽⁷⁾ | $\text{m}\Omega$ |
| | | w/ TurboTrans | Capacitance Value | | See TT chart ⁽⁸⁾ | | 12,000 ⁽⁹⁾ | μF |
| Capacitance \times ESR product ($C_O \times \text{ESR}$) | | | | | 10,000 ⁽¹⁰⁾ | $\mu\text{F} \times \text{m}\Omega$ | | |
| MTBF | Reliability | Per Bellcore TR-332, 50% stress, $T_A = 40^\circ\text{C}$, ground benign | | | | 3.6 | $10^6\ \text{Hr}$ | |

- (5) A minimum value of external output capacitor is required for proper operation. Adding additional capacitance at the load further improves transient response. See the Capacitor Application Information section for more guidance.
- (6) This is the calculated maximum. This value includes both ceramic and non-ceramic capacitors. The minimum ESR requirement often results in a lower value. See the related Application Information for more guidance.
- (7) This is the minimum ESR for all the electrolytic (nonceramic) capacitance. Use 5 $\text{m}\Omega$ as the minimum when using manufacturer's max-ESR values to calculate.
- (8) Minimum capacitance will be determined by your transient deviation requirement. A corresponding resistor, R_{TT} is required for proper operation. See the TurboTrans Selection section for guidance in selecting the capacitance and R_{TT} value.
- (9) This is the calculated maximum. This value includes both ceramic and non-ceramic capacitors.
- (10) When calculating the Capacitance \times ESR product use the capacitance and ESR values of a single capacitor. For an output capacitor bank of several capacitor types and values, calculate the $C \times \text{ESR}$ product using the values of the capacitor that makes up the majority of the capacitance.

PTH08T210W
(TOP VIEW)

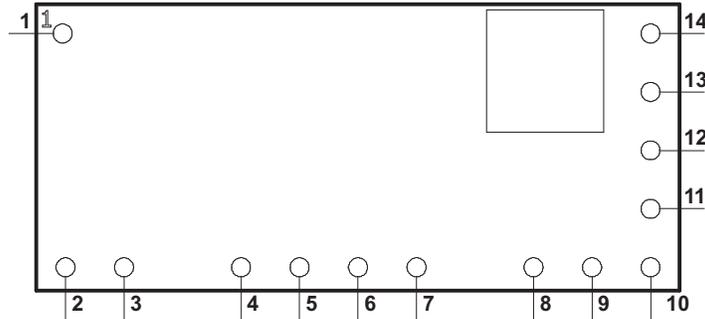

TERMINAL FUNCTIONS

| TERMINAL | | DESCRIPTION |
|---|--------------|--|
| NAME | NO. | |
| V_I | 2, 6 | The positive input voltage power node to the module, which is referenced to common GND. |
| V_O | 5, 9 | The regulated positive power output with respect to the GND. |
| GND | 3, 4 7, 8 | This is the common ground connection for the V_I and V_O power connections. It is also the 0 V_{dc} reference for the control inputs. |
| Inhibit ⁽¹⁾ / UVLO adjust | 1 | <p>The Inhibit pin is an open-collector/drain, negative logic input that is referenced to GND. Applying a low level ground signal to this input disables the module's output and turns off the output voltage. When the Inhibit control is active, the input current drawn by the regulator is significantly reduced. If the Inhibit pin is left open-circuit, the module produces an output whenever a valid input source is applied. This input is not compatible with TTL logic devices and should not be tied to V_I or any other voltage.</p> <p>This pin is also used for input undervoltage lockout (UVLO) programming. Connecting a resistor from this pin to GND (pin 3) allows the ON threshold of the UVLO to be adjusted higher than the default value. For more information, see the Application Information section.</p> |
| V_O Adjust | 12 | A 0.1 W 1% resistor must be directly connected between this pin and pin 8 (GND) to set the output voltage to a value higher than 0.7 V. The temperature stability of the resistor should be 100 ppm/°C (or better). The setpoint range for the output voltage is from 0.7 V to 3.6 V. If left open circuit, the output voltage will default to its lowest value. For further information, on output voltage adjustment see the related application note. The specification table gives the preferred resistor values for a number of standard output voltages. |
| + Sense | 10 | The sense input allows the regulation circuit to compensate for voltage drop between the module and the load. For optimal voltage accuracy, +Sense must be connected to V_O , very close to the load. |
| – Sense | 11 | The sense input allows the regulation circuit to compensate for voltage drop between the module and the load. For optimal voltage accuracy, –Sense must be connected to GND (pin 8), very close to the load. |
| Track | 14 | <p>This is an analog control input that enables the output voltage to follow an external voltage. This pin becomes active typically 20 ms after the input voltage has been applied, and allows direct control of the output voltage from 0 V up to the nominal set-point voltage. Within this range the module's output voltage follows the voltage at the Track pin on a volt-for-volt basis. When the control voltage is raised above this range, the module regulates at its set-point voltage. The feature allows the output voltage to rise simultaneously with other modules powered from the same input bus. If unused, this input should be connected to V_I.</p> <p>NOTE: Due to the undervoltage lockout feature, the output of the module cannot follow its own input voltage during power up. For more information, see the related application note.</p> |
| TurboTrans™ | 13 | This input pin adjusts the transient response of the regulator. To activate the TurboTrans™ feature, a 1%, 50 mW resistor must be connected between this pin and pin 10 (+Sense) very close to the module. For a given value of output capacitance, a reduction in peak output voltage deviation is achieved by using this feature. If unused, this pin must be left open-circuit. External capacitance must never be connected to this pin. The resistance requirement can be selected from the TurboTrans™ resistor table in the Application Information section. |

(1) Denotes negative logic: Open = Normal operation, Ground = Function active

TYPICAL CHARACTERISTICS⁽¹⁾⁽²⁾

CHARACTERISTIC DATA ($V_I = 12\text{ V}$)

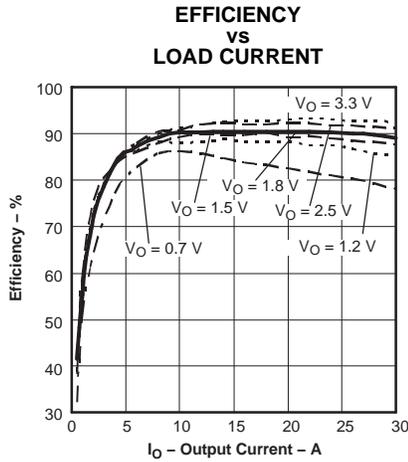


Figure 1.

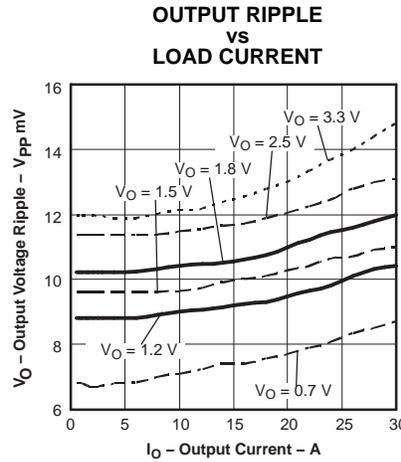


Figure 2.

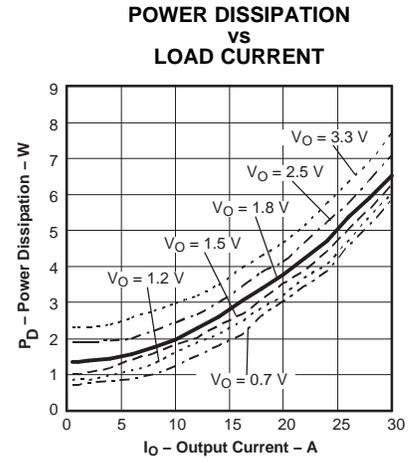


Figure 3.

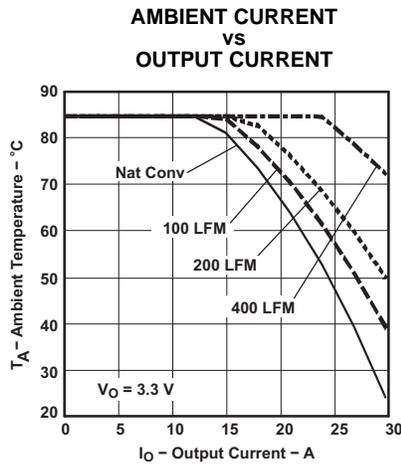


Figure 4.

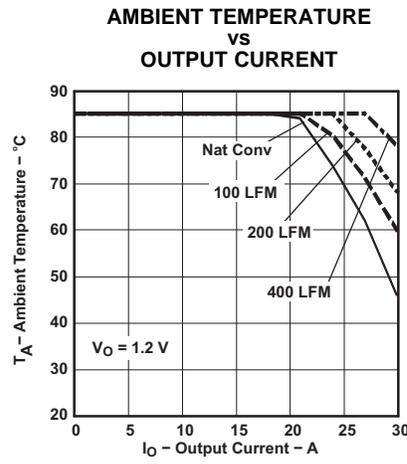


Figure 5.

- (1) The electrical characteristic data has been developed from actual products tested at 25°C. This data is considered typical for the converter. Applies to [Figure 1](#), [Figure 2](#), and [Figure 3](#).
- (2) The temperature derating curves represent the conditions at which internal components are at or below the manufacturer's maximum operating temperatures. Derating limits apply to modules soldered directly to a 100 mm x 100 mm double-sided PCB with 2 oz. copper. Applies to [Figure 5](#) and [Figure 4](#).

TYPICAL CHARACTERISTICS⁽¹⁾⁽²⁾

CHARACTERISTIC DATA ($V_I = 8\text{ V}$)

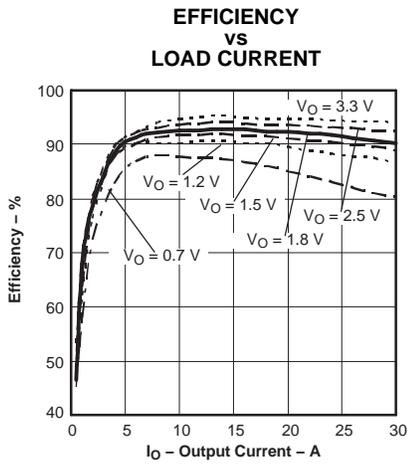


Figure 6.

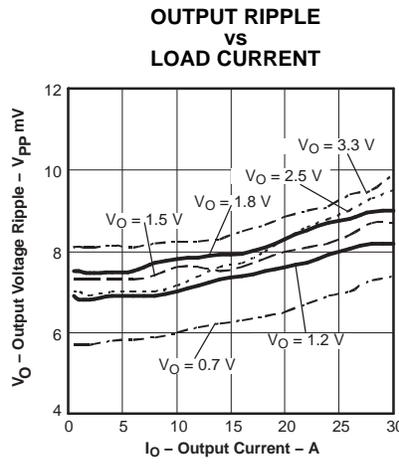


Figure 7.

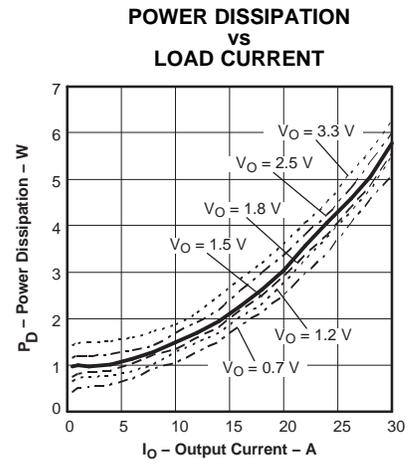


Figure 8.

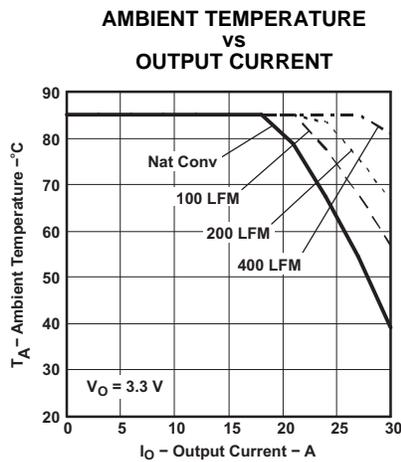


Figure 9.

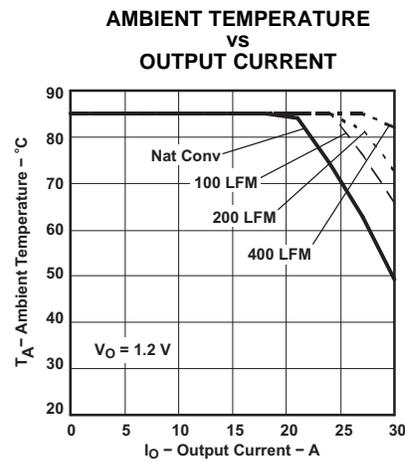


Figure 10.

- (1) The electrical characteristic data has been developed from actual products tested at 25°C. This data is considered typical for the converter. Applies to [Figure 6](#), [Figure 7](#), and [Figure 8](#).
- (2) The temperature derating curves represent the conditions at which internal components are at or below the manufacturer's maximum operating temperatures. Derating limits apply to modules soldered directly to a 100 mm x 100 mm double-sided PCB with 2 oz. copper. Applies to [Figure 9](#) and [Figure 10](#).

APPLICATION INFORMATION

CAPACITOR RECOMMENDATIONS FOR THE PTH08T210W POWER MODULE

Input Capacitor (Required)

The size and value of the input capacitor is determined by the converter's transient performance capability. The minimum amount of required input capacitance is 470 μF , with an RMS ripple current rating of 500 mA. This minimum value assumes that the converter is supplied with a responsive, low inductance input source. This source should have ample capacitive decoupling, and be distributed to the converter via PCB power and ground planes.

For high-performance/transient applications, or wherever the input source performance is degraded, 1000 μF of input capacitance is recommended. The additional input capacitance above the minimum level insures an optimized performance.

Ripple current (rms) rating, less than 100 m Ω of equivalent series resistance (ESR), and temperature are the main considerations when selecting input capacitors. The ripple current reflected from the input of the PTH08T210W module is moderate to low. Therefore any good quality, computer-grade electrolytic capacitor will have an adequate ripple current rating.

Regular tantalum capacitors are not recommended for the input bus. These capacitors require a recommended minimum voltage rating of $2 \times$ (maximum dc voltage + ac ripple). This is standard practice to ensure reliability. No tantalum capacitors were found with a sufficient voltage rating to meet this requirement. When the operating temperature is below 0°C, the ESR of aluminum electrolytic capacitors increases. For these applications, Os-Con, poly-aluminum, and polymer-tantalum types should be considered. Adding one or two ceramic capacitors to the input attenuates high-frequency reflected ripple current.

TurboTrans Output Capacitor

The PTH08T210W requires a minimum output capacitance of 470 μF . The required capacitance above 470 μF will be determined by actual transient deviation requirements.

TurboTrans allows the designer to optimize the capacitance load according to the system transient design requirement. High quality, ultra-low ESR capacitors are required to maximize TurboTrans effectiveness. Capacitors with a capacitance (μF) \times ESR (m Ω) product of $\leq 10,000\text{m}\Omega \times \mu\text{F}$ are required.

Working Example:

A bank of 6 identical capacitors, each with a capacitance of 680 μF and 5m Ω ESR, has a $C \times \text{ESR}$ product of 3400 $\mu\text{F} \times \text{m}\Omega$ (680 $\mu\text{F} \times 5\text{m}\Omega$).

Using TurboTrans in conjunction with the high quality capacitors (capacitance (μF) \times ESR (m Ω)) reduces the overall capacitance requirement while meeting the minimum transient amplitude level.

[Table 1](#) includes a preferred list of capacitors by type and vendor. See the Output Bus / TurboTrans column.

Note: See the TurboTrans Technology Application Notes within this document for selection of specific capacitance.

Non-TurboTrans Output Capacitor

The PTH08T210W requires a minimum output capacitance of 470 μF . Non-TurboTrans applications must observe minimum output capacitance ESR limits.

A combination of 200 μF of ceramic capacitors plus low ESR (15m Ω to 30m Ω) Os-Con electrolytic/tantalum type capacitors can be used. When using Polymer tantalum types, tantalum type, or Oscon types only, the capacitor ESR bank limit is 3m Ω to 5m Ω . (Note: no ceramic capacitors are required). This is necessary for the stable operation of the regulator. Additional capacitance can be added to improve the module's performance to load transients. High quality computer-grade electrolytic capacitors are recommended. Aluminum electrolytic capacitors provide adequate decoupling over the frequency range, 2 kHz to 150 kHz, and are suitable when ambient temperatures are above -20°C. For operation below -20°C, tantalum, ceramic, or Os-Con type capacitors are necessary.

When using a combination of one or more non-ceramic capacitors, the calculated equivalent ESR should be no lower than $2\text{m}\Omega$ ($4\text{m}\Omega$ when calculating using the manufacturer's maximum ESR values). A list of preferred low-ESR type capacitors, are identified in [Table 1](#).

Ceramic Capacitors

Above 150 kHz the performance of aluminum electrolytic capacitors is less effective. Multilayer ceramic capacitors have very low ESR and a resonant frequency higher than the bandwidth of the regulator. They can be used to reduce the reflected ripple current at the input as well as improve the transient response of the output.

When used on the output their combined ESR is not critical as long as the total value of ceramic capacitors, with values between $10\ \mu\text{F}$ and $100\ \mu\text{F}$, does not exceed $5000\ \mu\text{F}$ (non-TurboTrans). In TurboTrans applications, when ceramic capacitors are used on the output bus, total capacitance including bulk and ceramic types is not to exceed $12,000\ \mu\text{F}$.

Tantalum, Polymer-Tantalum Capacitors

Tantalum type capacitors are only used on the output bus, and are recommended for applications where the ambient operating temperature is less than 0°C . The AVX TPS series and Kemet capacitor series are suggested over many other tantalum types due to their higher rated surge, power dissipation, and ripple current capability. As a caution, many general-purpose tantalum capacitors have higher ESR, reduced power dissipation, and lower ripple current capability. These capacitors are also less reliable due to their reduced power dissipation and surge current ratings. Tantalum capacitors that have no stated ESR or surge current rating are not recommended for power applications.

Capacitor Table

[Table 1](#) identifies the characteristics of capacitors from a number of vendors with acceptable ESR and ripple current (rms) ratings. The recommended number of capacitors required at both the input and output buses is identified for each capacitor type.

This is not an extensive capacitor list. Capacitors from other vendors are available with comparable specifications. Those listed are for guidance. The RMS ripple current rating and ESR (at 100 kHz) are critical parameters necessary to ensure both optimum regulator performance and long capacitor life.

Designing for Fast Load Transients

The transient response of the dc/dc converter has been characterized using a load transient with a di/dt of $2.5\text{A}/\mu\text{s}$. The typical voltage deviation for this load transient is given in the Electrical Characteristics table using the minimum required value of output capacitance. As the di/dt of a transient is increased, the response of a converter's regulation circuit ultimately depends on its output capacitor decoupling network. This is an inherent limitation with any dc/dc converter once the speed of the transient exceeds its bandwidth capability.

If the target application specifies a higher di/dt or lower voltage deviation, the requirement can only be met with additional low ESR ceramic capacitor decoupling. Generally, with 50% load steps at $> 100\text{A}/\mu\text{s}$, adding multiple $10\ \mu\text{F}$ ceramic capacitors, 3225 case size, plus $10\times 1\ \mu\text{F}$, including numerous high frequency ceramics ($\leq 0.1\ \mu\text{F}$) are all that is required to soften the transient higher frequency edges. Special attention is essential with regards to location, types, and position of higher frequency ceramic and lower ESR bulk capacitors. DSP, FPGA and ASIC vendors identify types, location and capacitance required for optimum performance of the high frequency devices. The details regarding the PCB layout and capacitor/component placement are important at these high frequencies. Low impedance buses and unbroken PCB copper planes with components located as close to the high frequency processor are essential for optimizing transient performance. In many instances additional capacitors may be required to insure and minimize transient aberrations.

Table 1. Input/Output Capacitors⁽¹⁾

| Capacitor Vendor, Type Series (Style) | Capacitor Characteristics | | | | | Quantity | | | Vendor Part No. |
|--|---------------------------|------------|---------------------|-----------------------------------|--------------------|--------------------|----------------------|--------------------------------------|---|
| | Working Voltage | Value (µF) | Max. ESR at 100 kHz | Max Ripple Current at 85°C (Irms) | Physical Size (mm) | Input Bus | Output Bus | | |
| | | | | | | | No TurboTrans | TurboTrans (Cap Type) ⁽²⁾ | |
| Panasonic | 25 V | 1000 | 0.043Ω | >1690 mA | 16 × 15 | 1 | ≥ 2 ⁽³⁾ | N/R ⁽⁴⁾ | EEUFC1E102S |
| FC (Radial) | 25 V | 1800 | 0.029Ω | 2205 mA | 16 × 20 | 1 | ≥ 1 ⁽³⁾ | N/R ⁽⁴⁾ | EEUFC1E182 |
| FC(SMD) | 25 V | 2200 | 0.028Ω | >2490 mA | 18 × 21,5 | 1 | ≥ 1 ⁽³⁾ | N/R ⁽⁴⁾ | EEVFC1E222N |
| FK(SMD) | 25 V | 1000 | 0.060Ω | 1100 mA | 12,5×13,5 | 1 | ≥ 2 ⁽⁵⁾ | N/R ⁽⁴⁾ | EEVFK1V102Q |
| United Chemi-Con | | | | | | | | | |
| PTB, Poly-Tantalum(SMD) | 6.3 V | 470 | 0.025Ω | 2600 mA | 7,3x4,3x2.8 | N/R ⁽⁶⁾ | 2 - 4 ⁽³⁾ | C ≥ 2 ⁽²⁾ | 6PTB477MD8TER |
| LXZ, Aluminum (Radial) | 25 V | 680 | 0.068Ω | 1050 mA | 10 × 16 | 1 | 1 - 3 ⁽³⁾ | N/R ⁽⁴⁾ | LXZ25VB681M10X20LL |
| PS, Poly-Alum(Radial) | 16 V | 330 | 0.014Ω | 5060 mA | 10 × 12,5 | 2 | 2 - 3 | B ≥ 2 ⁽²⁾ | 16PS330MJ12 |
| PXA, Poly-Alum(SMD) | 16 V | 330 | 0.014Ω | 5050 mA | 10 × 12,2 | 2 | 2 - 3 | B ≥ 2 ⁽²⁾ | PXA16VC331MJ12TP |
| PS, Poly-Alum(Radial) | 6.3 V | 680 | 0.010Ω | 5500 mA | 10 × 12,5 | N/R ⁽⁶⁾ | 1 - 2 | C ≥ 1 ⁽²⁾ | 6PS680MJ12 |
| PXA, Poly-Alum(Radial) | 6.3 V | 470 | 0.012Ω | 4770 mA | 8 × 12,2 | N/R ⁽⁶⁾ | 1 - 2 | C ≥ 1 ⁽²⁾ | PXA6.3VC471MH12TP |
| Nichicon, Aluminum | 25 V | 470 | 0.070Ω | 985 mA | 12,5 × 15 | 1 | ≥ 2 ⁽³⁾ | N/R ⁽⁴⁾ | UPM1E471MHH6 |
| HD (Radial) | 25 V | 470 | 0.038Ω | 1430 mA | 10 × 16 | 1 | ≥ 2 ⁽³⁾ | N/R ⁽⁴⁾ | UHD1E471MHR |
| PM (Radial) | 35 V | 560 | 0.048Ω | 1360 mA | 16 × 15 | 1 | ≥ 2 ⁽³⁾ | N/R ⁽⁴⁾ | UPM1V561MHH6 |
| Panasonic, Poly-Alum | 2.0 V | 390 | 0.005Ω | 4000 mA | 7,3x4,3x4,2 | N/R ⁽⁶⁾ | N/R ⁽⁶⁾ | B ≥ 2 ⁽²⁾ | EEFSE0J391R(V _O ≤1.6V) ⁽⁷⁾ |
| Sanyo | | | | | | | | | |
| TPE, Poscap (SMD) | 6.3 V | 470 | 0.018Ω | 3500 mA | 7,3 × 4,3 | N/R ⁽⁶⁾ | 1 - 3 | C ≥ 1 ⁽²⁾ | 6TPE470MI |
| TPE Poscap(SMD) | 2.5 V | 470 | 0.007Ω | 4400 mA | 7,3 × 4,3 | N/R ⁽⁶⁾ | 1 - 2 | B ≥ 2 ⁽²⁾ | 2R5TPE470M7(V _O ≤ 1.8 V) ⁽⁷⁾ |
| TPD Poscap (SMD) | 2.5 V | 1000 | 0.005Ω | 6100 mA | 7,3 × 4,3 | N/R ⁽⁶⁾ | 1 | B ≥ 1 ⁽²⁾ | 2R5TPD1000M5(V _O ≤ 1.8 V) ⁽⁷⁾ |
| SA, Os-Con (Radial) | 16 V | 470 | 0.020Ω | >6080 mA | 16 × 23 | 1 | 1 - 4 | N/R ⁽⁴⁾ | 16SA470M |
| SP Oscon (Radial) | 10 V | 470 | 0.015 | >4500 mA | 10 × 11,5 | N/R ⁽⁶⁾ | 1 - 3 | C ≥ 2 ⁽²⁾ | 10SP470M |
| SEPC, Os-Con (Radial) | 16 V | 470 | 0.010Ω | >4700 mA | 10 × 13 | 1 | 1 - 2 | B ≥ 1 ⁽²⁾ | 16SEPC470M |
| SVPA, Os-Con (SMD) | 6.3 V | 470 | 0.020Ω | 4700mA | 10 × 10,3 | N/R ⁽⁶⁾ | 1 - 4 ⁽³⁾ | C ≥ 1 ⁽²⁾⁽³⁾ | 6SVPA470M |

(1) Capacitor Supplier Verification

Please verify availability of capacitors identified in this table. Capacitor suppliers may recommend alternative part numbers because of limited availability or obsolete products. In some instances, the capacitor product life cycle may be in decline and have short-term consideration for obsolescence.

RoHS, Lead-free and Material Details

See the capacitor suppliers regarding material composition, RoHS status, lead-free status, and manufacturing process requirements. Component designators or part number deviations can occur when material composition or soldering requirements are updated.

(2) Required capacitors with TurboTrans. See the TransTrans Application information for Capacitor Selection

Capacitor Type Groups by ESR (Equivalent Series Resistance) :

- Type A = (100 < capacitance × ESR ≤ 1000)
- Type B = (1,000 < capacitance × ESR ≤ 5,000)
- Type C = (5,001 < capacitance × ESR ≤ 10,000)

(3) Total bulk nonceramic capacitors on the output bus with ESR of ≥ 15mΩ to ≤ 30mΩ requires an additional ≥ 200 µF of ceramic capacitor.
(4) Aluminum Electrolytic capacitor not recommended for the TurboTrans due to higher ESR × capacitance products. Aluminum and higher ESR capacitors can be used in conjunction with lower ESR capacitance.
(5) Output bulk capacitor's maximum ESR is ≥ 30 mΩ. Additional ceramic capacitance of ≥ 200 µF is required.
(6) N/R – Not recommended. The voltage rating does not meet the minimum operating limits.
(7) The voltage rating of this capacitor only allows it to be used for output voltage that is equal to or less than 80% of the working voltage.

Table 1. Input/Output Capacitors (continued)

| Capacitor Vendor, Type Series (Style) | Capacitor Characteristics | | | | | Quantity | | | Vendor Part No. |
|---------------------------------------|---------------------------|------------|---------------------|-----------------------------------|--------------------|--------------------|----------------------|--------------------------------------|---|
| | Working Voltage | Value (µF) | Max. ESR at 100 kHz | Max Ripple Current at 85°C (Irms) | Physical Size (mm) | Input Bus | Output Bus | | |
| | | | | | | | No TurboTrans | TurboTrans (Cap Type) ⁽²⁾ | |
| AVX, Tantalum, Series III | 6.3 V | 680 | 0.035Ω | >2400 mA | 7,3x4,3x4,1 | N/R ⁽⁸⁾ | 2 - 7 ⁽⁹⁾ | N/R ⁽¹⁰⁾ | TPSE477M010R0045 |
| TPM Multianode | 6.3 V | 470 | 0.018Ω | >3800 mA | 7,3x4,3x4,1 | N/R ⁽⁸⁾ | 2 - 3 ⁽⁹⁾ | C ≥ 2 ⁽¹¹⁾⁽⁹⁾ | TPME687M006#0018 |
| TPS Series III (SMD) | 4 V | 1000 | 0.035Ω | 2405 mA | 7,3 × 5,7 | N/R ⁽⁸⁾ | 2 - 7 ⁽⁹⁾ | N/R ⁽¹⁰⁾ | TPSV108K004R0035 (V _O ≤ 2.2 V) ⁽¹²⁾ |
| Kemet, Poly-Tantalum | 6.3 V | 470 | 0.018Ω | 2700 mA | 7,3x4.3x4 | N/R ⁽⁸⁾ | 1 - 3 ⁽⁹⁾ | C ≥ 2 ⁽¹¹⁾ | T520X477M06ASE018 |
| T520 (SMD) | 6.3 V | 470 | 0.010Ω | >5200 mA | 7,3x4.3x4 | N/R ⁽⁸⁾ | 1 - 2 | B ≥ 1 ⁽¹¹⁾ | T530X477M006ASE010 |
| T530 (SMD) | 6.3 V | 470 | 0.005Ω | 7300 mA | 7,3x4.3x4 | N/R ⁽⁸⁾ | 1 | B ≥ 1 ⁽¹¹⁾ | T530X477M006ASE005 |
| T530 (SMD) | 2.5 V | 1000 | 0.005Ω | 7300 mA | 7,3x4.3x4 | N/R ⁽⁸⁾ | 1 | B ≥ 1 ⁽¹¹⁾ | T530X108M2R5ASE005 (V _O ≤ 2.0 V) ⁽¹²⁾ |
| Vishay-Sprague | | | | | | | | | |
| 594D, Tantalum (SMD) | 6.3 V | 1000 | 0.030Ω | 2890 mA | 7,2x5,7x4,1 | N/R ⁽⁸⁾ | 1 - 6 | N/R ⁽¹⁰⁾ | 594D108X06R3R2TR2T |
| 94SA, Os-con (Radial) | 16 V | 1000 | 0.015Ω | 9740 mA | 16 × 25 | 1 | 1 - 3 | N/R ⁽¹⁰⁾ | 94SA108X0016HBP |
| 94SVP Os-Con(SMD) | 16 V | 330 | 0.017Ω | >4500 mA | 10 × 12,7 | 2 | 2 - 3 | C ≥ 1 ⁽¹¹⁾ | 94SVP827X06R3F12 |
| Kemet, Ceramic X5R | 16 V | 10 | 0.002Ω | – | 3225 | 1 | ≥ 1 ⁽¹³⁾ | A ⁽¹¹⁾ | C1210C106M4PAC |
| (SMD) | 6.3 V | 47 | 0.002Ω | | | N/R ⁽⁸⁾ | ≥ 1 ⁽¹³⁾ | A ⁽¹¹⁾ | C1210C476K9PAC |
| Murata, Ceramic X5R | 6.3 V | 100 | 0.002Ω | – | 3225 | N/R ⁽⁸⁾ | ≥ 1 ⁽¹³⁾ | A ⁽¹¹⁾ | GRM32ER60J107M |
| (SMD) | 6.3 V | 47 | | | | N/R ⁽⁸⁾ | ≥ 1 ⁽¹³⁾ | A ⁽¹¹⁾ | GRM32ER60J476M |
| | 25 V | 22 | | | | 1 | ≥ 1 ⁽¹³⁾ | A ⁽¹¹⁾ | GRM32ER61E226K |
| | 16 V | 10 | | | | 1 | ≥ 1 ⁽¹³⁾ | A ⁽¹¹⁾ | GRM32DR61C106K |
| TDK, Ceramic X5R | 6.3 V | 100 | 0.002Ω | – | 3225 | N/R ⁽⁸⁾ | ≥ 1 ⁽¹³⁾ | A ⁽¹¹⁾ | C3225X5R0J107MT |
| (SMD) | 6.3 V | 47 | | | | N/R ⁽⁸⁾ | ≥ 1 ⁽¹³⁾ | A ⁽¹¹⁾ | C3225X5R0J476MT |
| | 16 V | 10 | | | | 1 | ≥ 1 ⁽¹³⁾ | A ⁽¹¹⁾ | C3225X5R1C106MT0 |
| | 16 V | 22 | | | | 1 | ≥ 1 ⁽¹³⁾ | A ⁽¹¹⁾ | C3225X5R1C226MT |

- (8) N/R – Not recommended. The voltage rating does not meet the minimum operating limits.
- (9) Total bulk nonceramic capacitors on the output bus with ESR of ≥ 15mΩ to ≤ 30mΩ requires an additional ≥ 200 µF of ceramic capacitor.
- (10) Aluminum Electrolytic capacitor not recommended for the TurboTrans due to higher ESR × capacitance products. Aluminum and higher ESR capacitors can be used in conjunction with lower ESR capacitance.
- (11) Required capacitors with TurboTrans. See the TransTrans Application information for Capacitor Selection Capacitor Type Groups by ESR (Equivalent Series Resistance) :
 - a. Type A = (100 < capacitance × ESR ≤ 1000)
 - b. Type B = (1,000 < capacitance × ESR ≤ 5,000)
 - c. Type C = (5,001 < capacitance × ESR ≤ 10,000)
- (12) The voltage rating of this capacitor only allows it to be used for output voltage that is equal to or less than 80% of the working voltage.
- (13) Maximum ceramic capacitance on the output bus is ≤ 3000 µF. Any combination of the ceramic capacitor values is limited to 3000 µF for non-TurboTrans applications. The total capacitance is limited to 14,000 µF which includes all ceramic and non-ceramic types.

TurboTrans™ Technology

TurboTrans technology is a feature introduced in the T2 generation of the PTH/PTV family of power modules. TurboTrans optimizes the transient response of the regulator with added external capacitance using a single external resistor. The benefits of this technology include: reduced output capacitance, minimized output voltage deviation following a load transient, and enhanced stability when using ultra-low ESR output capacitors. The amount of output capacitance required to meet a target output voltage deviation, is reduced with TurboTrans activated. Likewise, for a given amount of output capacitance, with TurboTrans engaged, the amplitude of the voltage deviation following a load transient will be reduced. Applications requiring tight transient voltage tolerances and minimized capacitor footprint area benefit from this technology.

TurboTrans™ Selection

Utilizing TurboTrans requires connecting a resistor, R_{TT} , between the +Sense pin (pin10) and the TurboTrans pin (pin13). The value of the resistor directly corresponds to the amount of output capacitance required. All T2 products require a minimum value of output capacitance whether or not TurboTrans is used. For the PTH08T210W, the minimum required capacitance is 470 μ F. When using TurboTrans, capacitors with a capacitance \times ESR product below 10,000 μ F \times m Ω are required. (Multiply the capacitance (in μ F) by the ESR (in m Ω) to determine the capacitance \times ESR product.) See the Capacitor Selection section of the datasheet for a variety of capacitors that meet this criteria.

Figure 11 through Figure 16, show the amount of output capacitance required to meet a desired transient voltage deviation with and without TurboTrans for several capacitor types; TypeA (e.g.ceramic), TypeB (e.g.polymer-tantalum), and TypeC (e.g.OS-CON). To calculate the proper value of R_{TT} , first determine the required transient voltage deviation limits and magnitude of the transient load step. Next, determine what type of output capacitors to be used. (If more than one type of output capacitor is used, select the capacitor type that makes up the majority of the total output capacitance.) Knowing this information, use the chart in Figure 11 through Figure 16 that corresponds to the capacitor type selected. To use the chart, begin by dividing the maximum voltage deviation limit (in mV) by the magnitude of the load step (in Amps). This gives a mV/A value. Find this value on the Y-axis of the appropriate chart. Read across the graph to the 'With TurboTrans' plot. From this point, read down to the X-axis which lists the minimum required capacitance, C_O , to meet the transient voltage deviation. The required R_{TT} resistor value can then be calculated using Equation 1 or selected from the TurboTrans table. The TurboTrans tables include both the required output capacitance and the corresponding R_{TT} values to meet several values of transient voltage deviation for 25%(7.5A), 50%(15A), and 75%(22.5A) output load steps.

The chart can also be used to determine the achievable transient voltage deviation for a given amount of output capacitance. Selecting the amount of output capacitance along the X-axis, reading up to the 'With TurboTrans' curve, and then over to the Y-axis, gives the transient voltage deviation limit for that value of output capacitance. The required R_{TT} resistor value can be calculated using Equation 1 or selected from the TurboTrans table.

As an example, let's look at a 12-V application requiring a 75mV deviation during a 15A, 50% load transient. A majority of 330 μ F, 10m Ω output capacitors will be used. Use the 12V, TypeB capacitor chart, Figure 13. Dividing 75mV by 15A gives 5mV/A transient voltage deviation per amp of transient load step. Select 5mV/A on the Y-axis and read across to the 'With TurboTrans' plot. Following this point down to the X-axis gives us a minimum required output capacitance of approximately 1300 μ F. The required R_{TT} resistor value for 1300 μ F can then be calculated or selected from Figure 13. The required R_{TT} resistor is approximately 10.2k Ω .

To see the benefit of TurboTrans, follow the 5mV/A marking across to the 'Without TurboTrans' plot. Following that point down shows that a minimum of 8200 μ F of output capacitance is required to meet the same transient deviation limit. This is the benefit of TurboTrans. A typical TurboTrans application schematic is shown in Figure 17.

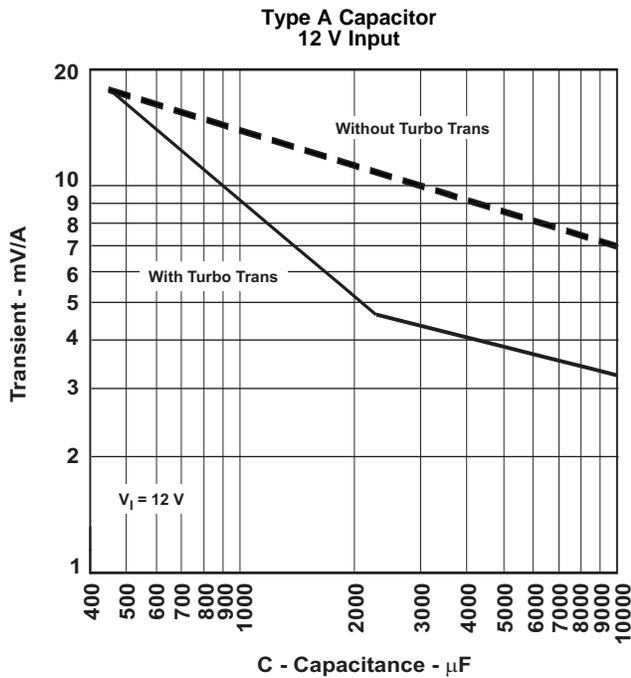


Figure 11. Cap Type A, $100 \leq C(\mu\text{F}) \times \text{ESR}(\text{m}\Omega) \leq 1000$ (e.g. Ceramic)

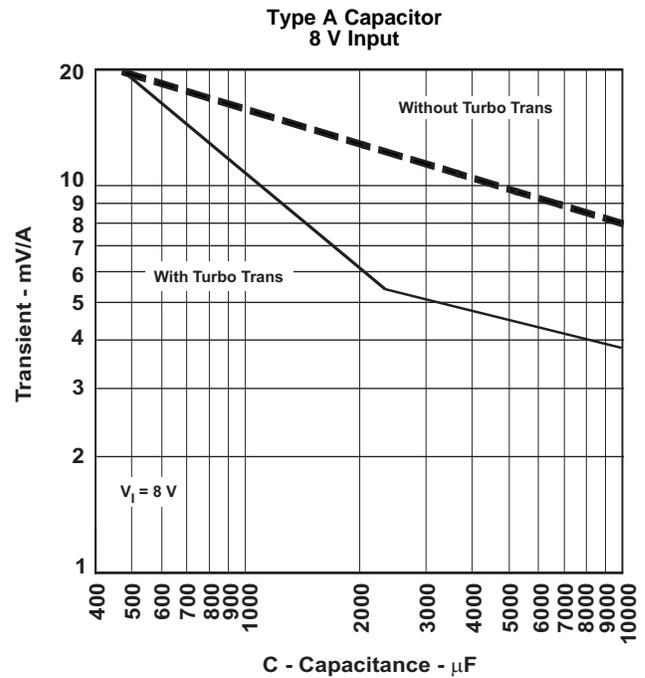


Figure 12. Cap Type A, $100 \leq C(\mu\text{F}) \times \text{ESR}(\text{m}\Omega) \leq 1000$ (e.g. Ceramic)

Table 2. Type A TurboTrans C_O Values & Required R_{TT} Selection Table

| Transient Voltage Deviation (mV) | | | 12 V Input | | 8 V Input | |
|----------------------------------|----------------------|------------------------|---|--|---|--|
| 25% Load Step (7.5 A) | 50% Load Step (15 A) | 75% Load Step (22.5 A) | C_O Minimum Required Output Capacitance (μF) | R_{TT} Required TurboTrans Resistor (Ω) | C_O Minimum Required Output Capacitance (μF) | R_{TT} Required TurboTrans Resistor (Ω) |
| 130 | 260 | 390 | 470 | open | 580 | 127 k |
| 120 | 240 | 360 | 520 | 294 k | 640 | 80.6 k |
| 110 | 220 | 330 | 580 | 127 k | 710 | 54.9 k |
| 100 | 200 | 300 | 650 | 76.8 k | 800 | 37.4 k |
| 90 | 180 | 270 | 740 | 47.5 k | 900 | 26.7 k |
| 80 | 160 | 240 | 850 | 31.6 k | 1050 | 17.8 k |
| 70 | 140 | 210 | 1000 | 20.5 k | 1250 | 11.3 k |
| 60 | 120 | 180 | 1200 | 12.7 k | 1500 | 6.65 k |
| 50 | 100 | 150 | 1500 | 6.65 k | 1900 | 2.55 k |
| 40 | 80 | 120 | 2000 | 1.82 k | 2600 | 0 |
| 30 | 60 | 90 | 4000 | 0 | 7800 | 0 |

R_{TT} Resistor Selection

The TurboTrans resistor value, R_{TT} can be determined from the TurboTrans programming equation, see Equation 1.

$$R_{TT} = 40 \times \frac{1 - (C_O / 2350)}{5 \times (C_O / 2350) - 1} \text{ k}\Omega \tag{1}$$

Where C_O is the total output capacitance in μF . C_O values greater than or equal to 2350 μF require R_{TT} to be a short, 0 Ω . (Equation 1 will result in a negative value for R_{TT} when $C_O \geq 2350 \mu\text{F}$.)

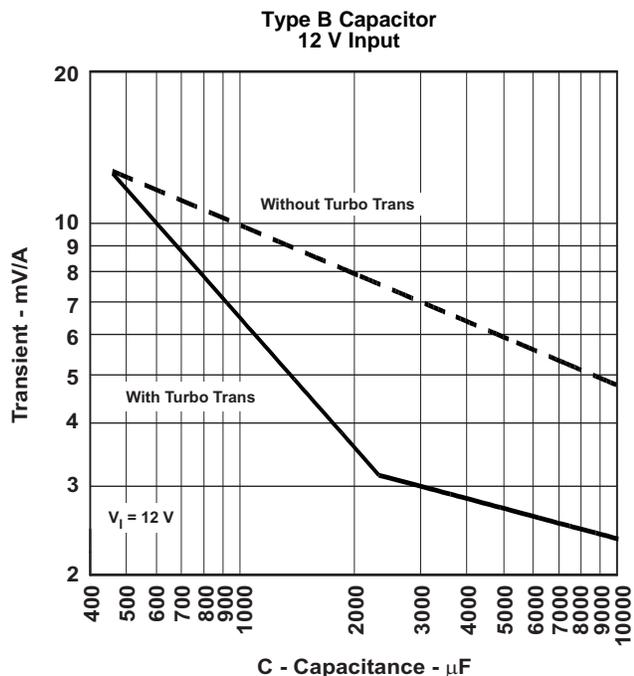


Figure 13. Cap Type B, $1000 \leq C(\mu\text{F}) \times \text{ESR}(\text{m}\Omega) \leq 5000$ (e.g. Polymer-Tantalum)

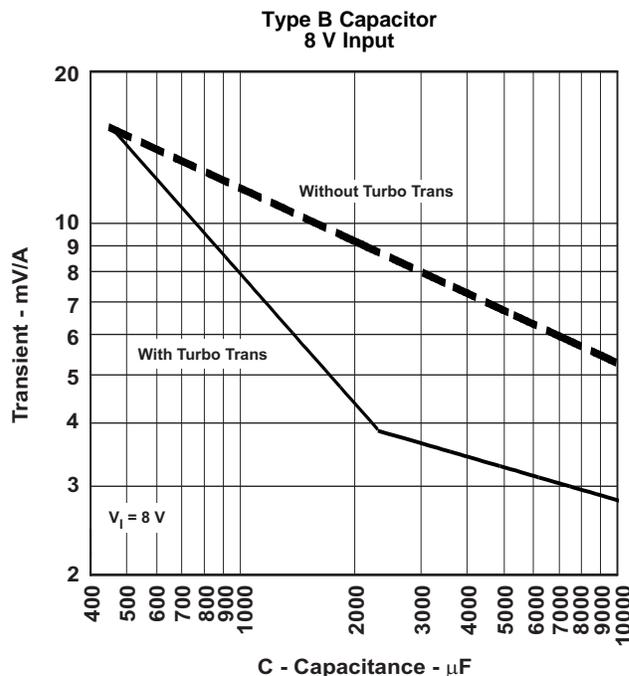


Figure 14. Cap Type B, $1000 \leq C(\mu\text{F}) \times \text{ESR}(\text{m}\Omega) \leq 5000$ (e.g. Polymer-Tantalum)

Table 3. Type B TurboTrans C_O Values & Required R_{TT} Selection Table

| Transient Voltage Deviation (mV) | | | 12 V Input | | 8 V Input | |
|----------------------------------|----------------------|------------------------|---|--|---|--|
| 25% Load Step (7.5 A) | 50% Load Step (15 A) | 75% Load Step (22.5 A) | C_O Minimum Required Output Capacitance (μF) | R_{TT} Required TurboTrans Resistor (Ω) | C_O Minimum Required Output Capacitance (μF) | R_{TT} Required TurboTrans Resistor (Ω) |
| 100 | 200 | 300 | 470 | open | 540 | 205 k |
| 90 | 180 | 270 | 500 | 499 k | 620 | 93.1 k |
| 80 | 160 | 240 | 580 | 127 k | 720 | 52.3 k |
| 70 | 140 | 210 | 680 | 63.4 k | 840 | 32.4 k |
| 60 | 120 | 180 | 800 | 37.4 k | 1000 | 20.5 k |
| 50 | 100 | 150 | 1000 | 20.5 k | 1300 | 10.2 k |
| 40 | 80 | 120 | 1300 | 10.2 k | 1700 | 4.22 k |
| 30 | 60 | 90 | 1800 | 3.32 k | 2300 | 221 |
| 25 | 50 | 75 | 2200 | 698 | 4900 | 0 |
| 20 | 40 | 60 | 5400 | 0 | 14000 | 0 |

R_{TT} Resistor Selection

The TurboTrans resistor value, R_{TT} can be determined from the TurboTrans programming equation, see [Equation 1](#).

C_O values greater than or equal to 2350 μF require R_{TT} to be a short, 0 Ω . ([Equation 1](#) will result in a negative value for R_{TT} when $C_O \geq 2350 \mu\text{F}$.)

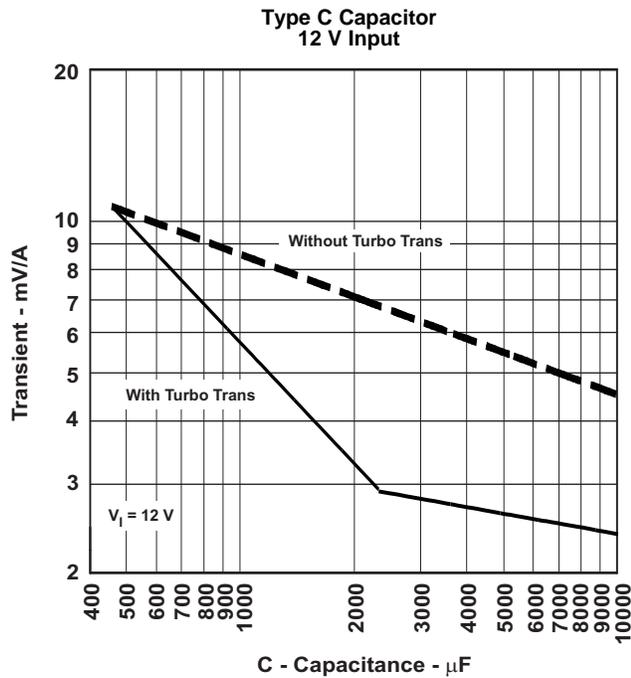


Figure 15. Cap Type C, $5000 \leq C(\mu\text{F}) \times \text{ESR}(\text{m}\Omega) \leq 10,000$ (e.g. Os-Con)

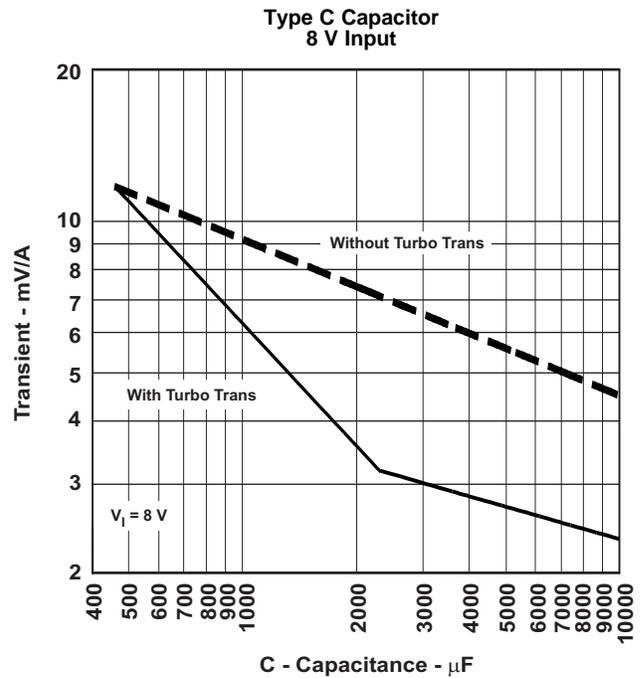


Figure 16. Cap Type C, $5000 \leq C(\mu\text{F}) \times \text{ESR}(\text{m}\Omega) \leq 10,000$ (e.g. Os-Con)

Table 4. Type C TurboTrans C_O Values & Required R_{TT} Selection Table

| Transient Voltage Deviation (mV) | | | 12 V Input | | 8 V Input | |
|----------------------------------|----------------------|------------------------|---|--|---|--|
| 25% Load Step (7.5 A) | 50% Load Step (15 A) | 75% Load Step (22.5 A) | C_O Minimum Required Output Capacitance (μF) | R_{TT} Required TurboTrans Resistor (Ω) | C_O Minimum Required Output Capacitance (μF) | R_{TT} Required TurboTrans Resistor (Ω) |
| 80 | 160 | 240 | 470 | open | 520 | 294 k |
| 70 | 140 | 210 | 560 | 158 k | 620 | 93.1 k |
| 60 | 120 | 180 | 680 | 63.4 k | 750 | 45.3 k |
| 50 | 100 | 150 | 850 | 31.6 k | 940 | 24.3 k |
| 40 | 80 | 120 | 1100 | 15.8 k | 1300 | 10.2 k |
| 35 | 70 | 105 | 1300 | 10.2 k | 1500 | 6.65 k |
| 30 | 60 | 90 | 1600 | 5.36 k | 1800 | 3.32 k |
| 25 | 50 | 75 | 2000 | 1.82 k | 2200 | 698 |
| 20 | 40 | 60 | 4000 | 0 | 5400 | 0 |

R_{TT} Resistor Selection

The TurboTrans resistor value, R_{TT} can be determined from the TurboTrans programming equation, see [Equation 1](#).

C_O values greater than or equal to 2350 μF require R_{TT} to be a short, 0Ω . ([Equation 1](#) will result in a negative value for R_{TT} when $C_O \geq 2350 \mu\text{F}$.)

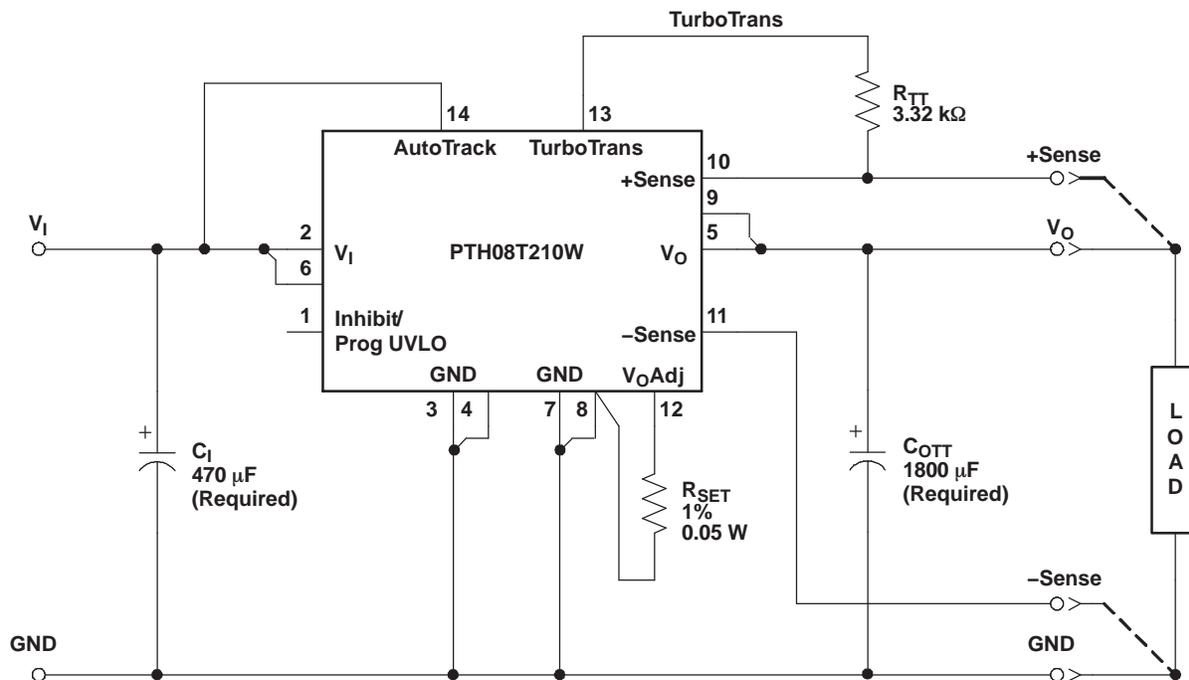


Figure 17. Typical TurboTrans Application Schematic

ADJUSTING THE OUTPUT VOLTAGE


The V_O Adjust control (pin 12) sets the output voltage of the PTH08T210W. The adjustment range of the PTH08T210W is 0.7V to 3.6V. The adjustment method requires the addition of a single external resistor, R_{SET} , that must be connected directly between the V_O Adjust and GND pins. Table 5 gives the preferred value of the external resistor for a number of standard voltages, along with the actual output voltage that this resistance value provides.

For other output voltages, the value of the required resistor can either be calculated using the following formula, or simply selected from the range of values given in Table 6. Figure 18 shows the placement of the required resistor.

$$R_{SET} = 30.1 \text{ k}\Omega \times \frac{0.7}{V_O - 0.7} - 6.49 \text{ k}\Omega \tag{2}$$

Table 5. Preferred Values of R_{SET} for Standard Output Voltages

| V_O (Standard) (V) | R_{SET} (Preferred Value) (Ω) | V_O (Actual) (V) |
|----------------------|--|--------------------|
| 3.3 | 1.62 k | 3.298 |
| 2.5 | 5.23 k | 2.498 |
| 2 | 9.76 k | 1.997 |
| 1.8 | 12.7 k | 1.798 |
| 1.5 | 19.6 k | 1.508 |
| 1.2 | 35.7 k | 1.199 |
| 1 | 63.4 k | 1.001 |
| 0.7 | Open | 0.700 |

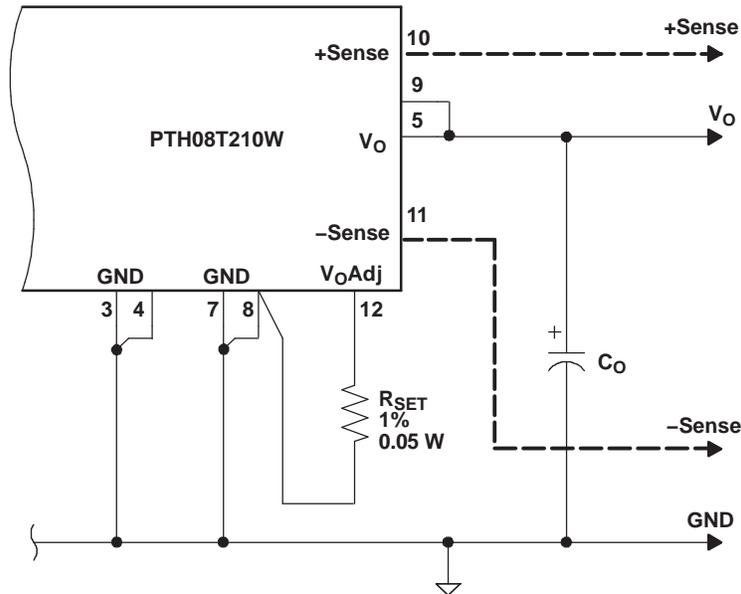

- (1) Use a 0.05 W resistor. The tolerance should be 1%, with temperature stability of 100 ppm/°C (or better). Place the resistor as close to the regulator as possible. Connect the resistor directly between pins 12 and 8 using dedicated PCB traces.
- (2) Never connect capacitors from V_O Adjust to either GND or V_O . Any capacitance added to the V_O Adjust pin affects the stability of the regulator.

Figure 18. V_O Adjust Resistor Placement

Table 6. Output Voltage Set-Point Resistor Values

| V_a Required (V) | R_{SET} (kΩ) | V_a Required (V) | R_{SET} (kΩ) |
|-----------------------------------|-----------------------------|-----------------------------------|-----------------------------|
| 0.70 | Open | 2.10 | 8.66 |
| 0.75 | 412 | 2.20 | 7.50 |
| 0.80 | 205 | 2.30 | 6.65 |
| 0.85 | 133 | 2.40 | 5.90 |
| 0.90 | 97.6 | 2.50 | 5.23 |
| 0.95 | 78.7 | 2.60 | 4.64 |
| 1.00 | 63.4 | 2.70 | 4.02 |
| 1.10 | 46.4 | 2.80 | 3.57 |
| 1.20 | 35.7 | 2.90 | 3.09 |
| 1.30 | 28.7 | 3.00 | 2.67 |
| 1.40 | 23.7 | 3.10 | 2.26 |
| 1.50 | 19.6 | 3.20 | 1.96 |
| 1.60 | 16.9 | 3.30 | 1.62 |
| 1.70 | 14.7 | 3.40 | 1.30 |
| 1.80 | 12.7 | 3.50 | 1.02 |
| 1.90 | 11.0 | 3.60 | 0.768 |
| 2.00 | 9.76 | | |

UNDERVOLTAGE LOCKOUT (UVLO)

The PTH08T210W power modules incorporate an input undervoltage lockout (UVLO). The UVLO feature prevents the operation of the module until there is sufficient input voltage to produce a valid output voltage. This enables the module to provide a clean, monotonic powerup for the load circuit, and also limits the magnitude of current drawn from the regulator’s input source during the power-up sequence.

The UVLO characteristic is defined by the *ON* threshold (V_{THD}) voltage. Below the *ON* threshold the module does not produce an output. The Inhibit control becomes active when the input voltage is greater than 4.25 V. The hysteresis voltage, which is the difference between the *ON* and *OFF* threshold voltages, is nominally set at 900mV. The hysteresis prevents start-up oscillations, which can occur if the input voltage droops slightly when the module begins drawing current from the input source.

UVLO Adjustment

The UVLO feature of the PTH08T210W module allows for limited adjustment of the *ON* threshold voltage. The adjustment is made via the *Inhibit/UVLO Prog* control pin (pin 1). When pin 1 is left open circuit, the *ON* threshold voltage is internally set to its default value. The *ON* threshold has a nominal voltage of 5.0 V, and the hysteresis 900 mV. This ensures that the module produces a regulated output when the minimum input voltage is applied. The *ON* threshold might need to be increased if the module is powered from a tightly regulated 12-V bus. This allows the *ON* threshold voltage to be set for a specified input voltage. Adjusting the threshold voltage prevents the module from operating if the input bus fails to completely rise to its specified regulation voltage.

Equation 3 determines the value of R_{UVLO} required to adjust V_{THD} to a new value. The default value is 5 V, and it may only be adjusted to a higher value.

$$R_{UVLO} = \frac{2590 - (24.9 \times (V_I - 1))}{24.9 \times (V_I - 1) - 100} \text{ k}\Omega \tag{3}$$

Table 7 lists the standard resistor values for R_{UVLO} for different options of the on-threshold (V_{THD}) voltage.

Table 7. Calculated Values of R_{UVLO} for Various Values of V_{THD}

| V_{THD} | 6.5 V | 7.0 V | 7.5 V | 8.0 V | 8.5 V | 9.0 V | 9.5 V | 10.0 V | 10.5 V |
|------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| R_{UVLO} | 66.5 k Ω | 49.9 k Ω | 39.2 k Ω | 32.4 k Ω | 27.4 k Ω | 24.3 k Ω | 21.5 k Ω | 19.1 k Ω | 17.4 k Ω |

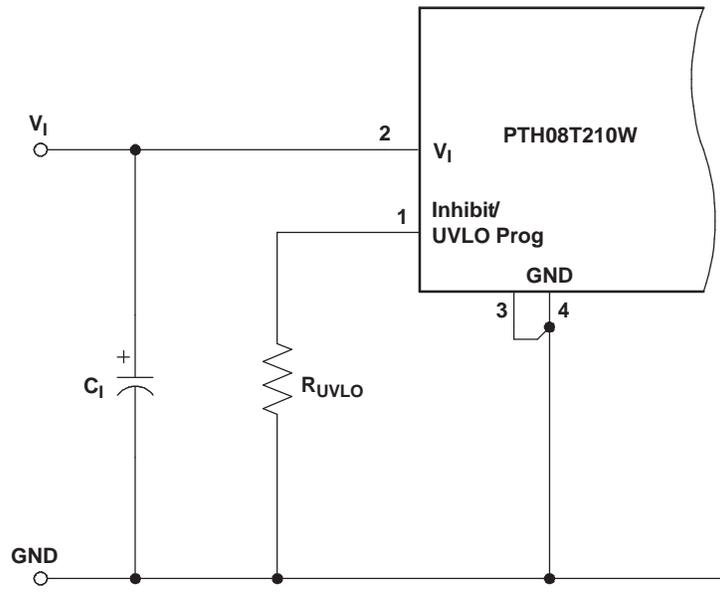


Figure 19. UVLO Program Resistor Placement

Soft-Start Power Up

The Auto-Track feature allows the power-up of multiple PTH/PTV modules to be directly controlled from the Track pin. However in a stand-alone configuration, or when the Auto-Track feature is not being used, the Track pin should be directly connected to the input voltage, V_I . (see [Figure 20](#))

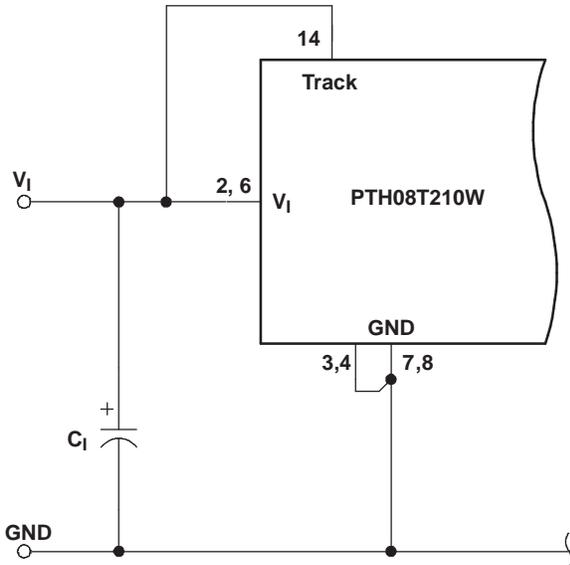


Figure 20. Power-Up Application Circuit

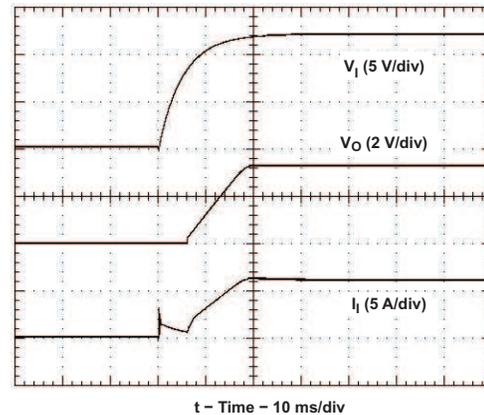


Figure 21. Power-Up Waveform

When the Track pin is connected to the input voltage the Auto-Track function is permanently disengaged. This allows the module to power up entirely under the control of its internal soft-start circuitry. When power up is under soft-start control, the output voltage rises to the set-point at a quicker and more linear rate. From the moment a valid input voltage is applied, the soft-start control introduces a short time delay (typically 8 ms–15 ms) before allowing the output voltage to rise. The output then progressively rises to the module's setpoint voltage.

[Figure 21](#) shows the soft-start power-up characteristic of the PTH08T210W operating from a 12-V input bus and configured for a 3.3-V output. The waveforms were measured with a 20-A constant current load and the Auto-Track feature disabled. The initial rise in input current when the input voltage first starts to rise is the charge current drawn by the input capacitors. Power-up is complete within 25 ms.

Remote Sense

Products with this feature incorporate one or two remote sense pins. Remote sensing improves the load regulation performance of the module by allowing it to compensate for any IR voltage drop between its output and the load. An IR drop is caused by the high output current flowing through the small amount of pin and trace resistance.

To use this feature simply connect the Sense pins to the corresponding output voltage node, close to the load circuit. If a sense pin is left open-circuit, an internal low-value resistor (15- Ω or less) connected between the pin and the output node, ensures the output remains in regulation.

With the sense pin connected, the difference between the voltage measured directly between the V_O and GND pins, and that measured at the Sense pins, is the amount of IR drop being compensated by the regulator. This should be limited to a maximum of 0.3 V.

The remote sense feature is not designed to compensate for the forward drop of nonlinear or frequency dependent components that may be placed in series with the converter output. Examples include OR-ing diodes, filter inductors, ferrite beads, and fuses. When these components are enclosed by the remote sense connection they are effectively placed inside the regulation control loop, which can adversely affect the stability of the regulator.

Output On/Off Inhibit

For applications requiring output voltage on/off control, the PTH08T210W incorporates an output Inhibit control pin. The inhibit feature can be used wherever there is a requirement for the output voltage from the regulator to be turned off.

The power modules function normally when the Inhibit pin is left open-circuit, providing a regulated output whenever a valid source voltage is connected to V_I with respect to GND. The Inhibit function becomes active when the input voltage is greater than 4.25 V.

Figure 22 shows the typical application of the inhibit function. Note the discrete transistor (Q1). The Inhibit input has its own internal pull-up to a potential of 5 V. The input is not compatible with TTL logic devices and should not be tied to V_I . An open-collector (or open-drain) discrete transistor is recommended for control.

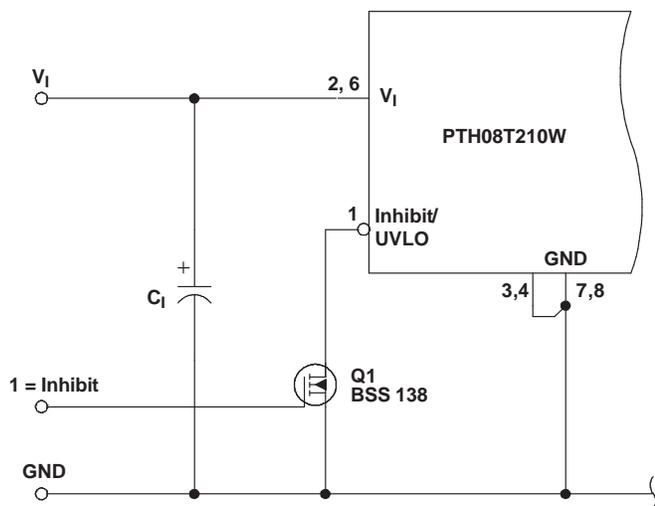


Figure 22. On/Off Inhibit Control Circuit

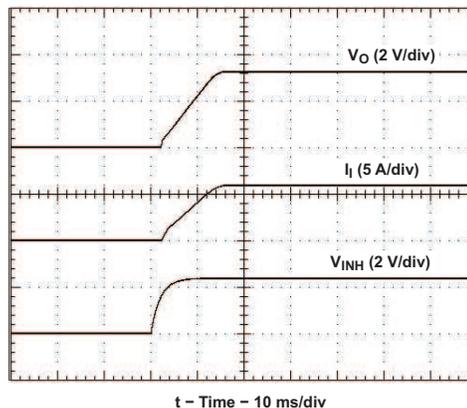


Figure 23. Power-Up Response from Inhibit Control

Turning Q1 on applies a low voltage to the Inhibit control pin and disables the output of the module. If Q1 is then turned off, the module executes a soft-start power-up sequence. A regulated output voltage is produced within 25 ms. Figure 23 shows the typical rise in both the output voltage and input current, following the turn-off of Q1. The turn off of Q1 corresponds to the rise in the waveform, $Q1 V_{DS}$. The waveforms were measured with a 20-A constant current load.

NOTE: When applying a low voltage (≤ 0.6 V) to the Inhibit control pin to turn off the module, the low side FET will immediately discharge any capacitance on the output bus. Depending on the amount and type of capacitors, this may induce a negative voltage transient that can momentarily go below GND potential. If turn-off control is desired, the Auto-Track pin can be used to the control ramp up and ramp down of the output voltage.

Overcurrent Protection

For protection against load faults, all modules incorporate output overcurrent protection. Applying a load that exceeds the regulator's overcurrent threshold causes the regulated output to shut down. Following shutdown, a module periodically attempts to recover by initiating a soft-start power-up. This is described as a *hiccup* mode of operation, whereby the module continues in a cycle of successive shutdown and power up until the load fault is removed. During this period, the average current flowing into the fault is significantly reduced. Once the fault is removed, the module automatically recovers and returns to normal operation.

Overtemperature Protection (OTP)

A thermal shutdown mechanism protects the module's internal circuitry against excessively high temperatures. A rise in the internal temperature may be the result of a drop in airflow, or a high ambient temperature. If the internal temperature exceeds the OTP threshold, the module's Inhibit control is internally pulled low. This turns the output off. The output voltage drops as the external output capacitors are discharged by the load circuit. The recovery is automatic, and begins with a soft-start power up. It occurs when the sensed temperature decreases by about 10°C below the trip point.

The overtemperature protection is a last resort mechanism to prevent thermal stress to the regulator. Operation at or close to the thermal shutdown temperature is not recommended and reduces the long-term reliability of the module. Always operate the regulator within the specified safe operating area (SOA) limits for the worst-case conditions of ambient temperature and airflow.

Auto-Track™ Function

The Auto-Track function is unique to the PTH/PTV family, and is available with all POLA products. Auto-Track was designed to simplify the amount of circuitry required to make the output voltage from each module power up and power down in sequence. The sequencing of two or more supply voltages during power up is a common requirement for complex mixed-signal applications that use dual-voltage VLSI ICs such as the TMS320™ DSP family, microprocessors, and ASICs.

How Auto-Track™ Works

Auto-Track works by forcing the module output voltage to follow a voltage presented at the *Track* control pin ⁽¹⁾. This control range is limited to between 0 V and the module set-point voltage. Once the track-pin voltage is raised above the set-point voltage, the module output remains at its set-point ⁽²⁾. As an example, if the *Track* pin of a 2.5-V regulator is at 1 V, the regulated output is 1 V. If the voltage at the *Track* pin rises to 3 V, the regulated output does not go higher than 2.5 V.

When under Auto-Track control, the regulated output from the module follows the voltage at its *Track* pin on a volt-for-volt basis. By connecting the *Track* pin of a number of these modules together, the output voltages follow a common signal during power up and power down. The control signal can be an externally generated master ramp waveform, or the output voltage from another power supply circuit ⁽³⁾. For convenience, the *Track* input incorporates an internal RC-charge circuit. This operates off the module input voltage to produce a suitable rising waveform at power up.

Typical Application

The basic implementation of Auto-Track allows for simultaneous voltage sequencing of a number of Auto-Track compliant modules. Connecting the *Track* inputs of two or more modules forces their track input to follow the same collective RC-ramp waveform, and allows their power-up sequence to be coordinated from a common Track control signal. This can be an open-collector (or open-drain) device, such as a power-up reset voltage supervisor IC. See U3 in [Figure 24](#).

To coordinate a power-up sequence, the Track control must first be pulled to ground potential. This should be done at or before input power is applied to the modules. The ground signal should be maintained for at least 20 ms after input power has been applied. This brief period gives the modules time to complete their internal soft-start initialization ⁽⁴⁾, enabling them to produce an output voltage. A low-cost supply voltage supervisor IC, that includes a built-in time delay, is an ideal component for automatically controlling the Track inputs at power up.

[Figure 24](#) shows how the TL7712A supply voltage supervisor IC (U3) can be used to coordinate the sequenced power up of PTH08T210W modules. The output of the TL7712A supervisor becomes active above an input voltage of 3.6 V, enabling it to assert a ground signal to the common track control well before the input voltage has reached the module's undervoltage lockout threshold. The ground signal is maintained until approximately 28 ms after the input voltage has risen above U3's voltage threshold, which is 10.95 V. The 28-ms time period is controlled by the capacitor C3. The value of 2.2 μF provides sufficient time delay for the modules to complete their internal soft-start initialization. The output voltage of each module remains at zero until the track control voltage is allowed to rise. When U3 removes the ground signal, the track control voltage automatically rises. This causes the output voltage of each module to rise simultaneously with the other modules, until each reaches its respective set-point voltage.

Figure 25 shows the output voltage waveforms after input voltage is applied to the circuit. The waveforms, V_{O1} and V_{O2} , represent the output voltages from the two power modules, U1 (3.3 V) and U2 (1.8 V), respectively. V_{TRK} , V_{O1} , and V_{O2} are shown rising together to produce the desired simultaneous power-up characteristic.

The same circuit also provides a power-down sequence. When the input voltage falls below U3's voltage threshold, the ground signal is re-applied to the common track control. This pulls the track inputs to zero volts, forcing the output of each module to follow, as shown in Figure 26. Power down is normally complete before the input voltage has fallen below the modules' undervoltage lockout. This is an important constraint. Once the modules recognize that an input voltage is no longer present, their outputs can no longer follow the voltage applied at their track input. During a power-down sequence, the fall in the output voltage from the modules is limited by the Auto-Track slew rate capability.

Notes on Use of Auto-Track™

1. The *Track* pin voltage must be allowed to rise above the module set-point voltage before the module regulates at its adjusted set-point voltage.
2. The Auto-Track function tracks almost any voltage ramp during power up, and is compatible with ramp speeds of up to 1 V/ms.
3. The absolute maximum voltage that may be applied to the *Track* pin is the input voltage V_I .
4. The module cannot follow a voltage at its track control input until it has completed its soft-start initialization. This takes about 20 ms from the time that a valid voltage has been applied to its input. During this period, it is recommended that the *Track* pin be held at ground potential.
5. The Auto-Track function is disabled by connecting the *Track* pin to the input voltage (V_I). When Auto-Track is disabled, the output voltage rises at a quicker and more linear rate after input power has been applied.

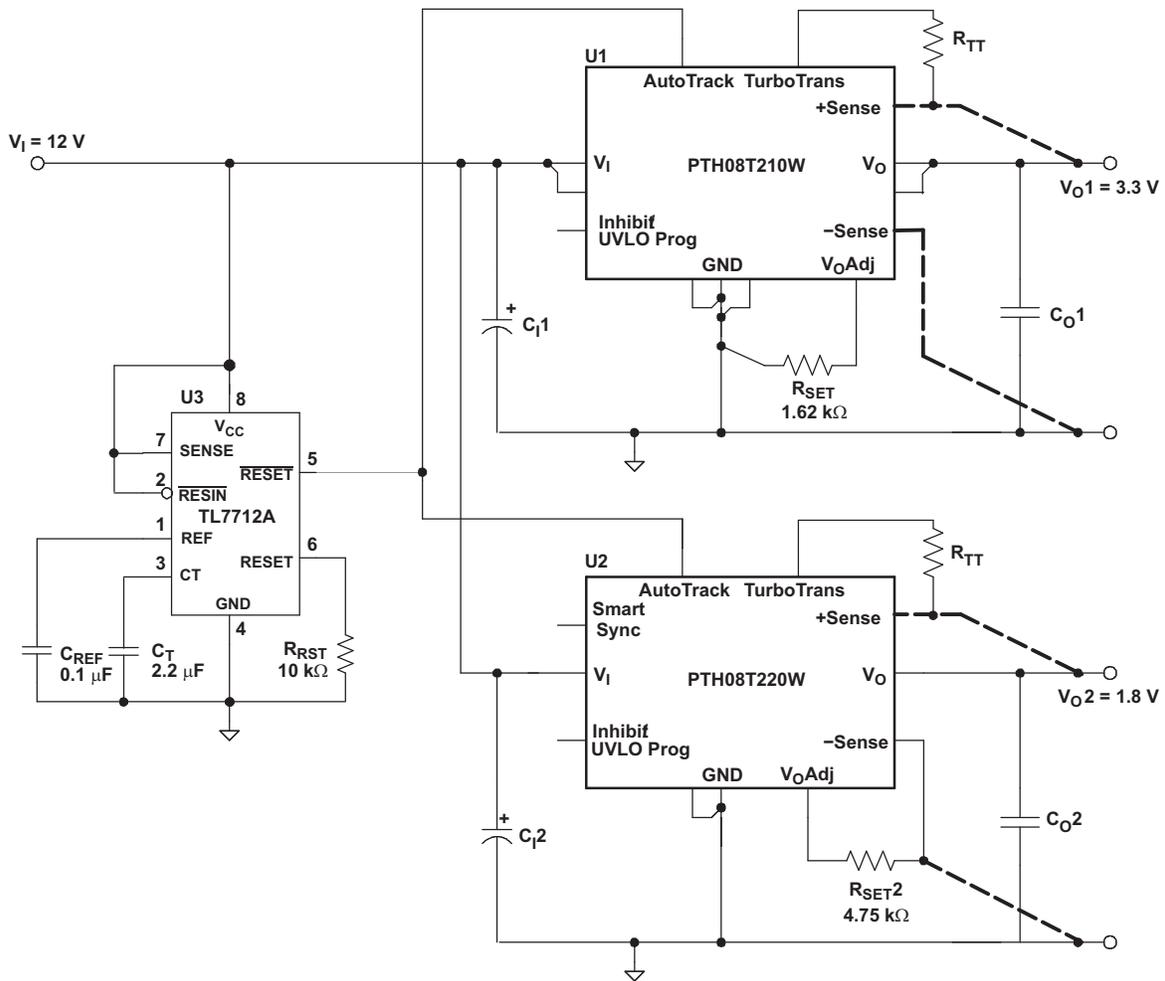


Figure 24. Sequenced Power Up and Power Down Using Auto-Track

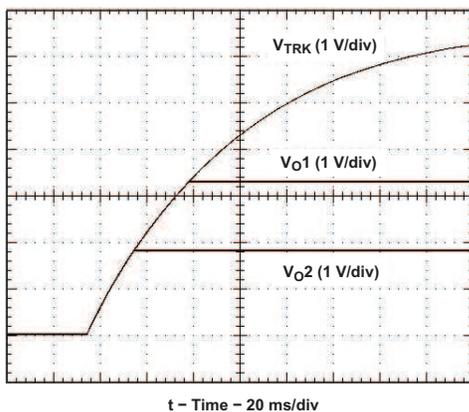


Figure 25. Simultaneous Power Up With Auto-Track Control




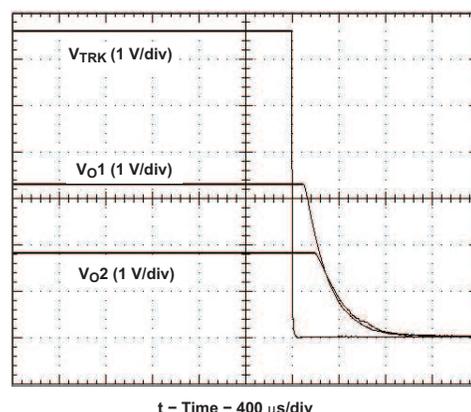


Figure 26. Simultaneous Power Down With Auto-Track Control

TAPE & REEL AND TRAY DRAWINGS

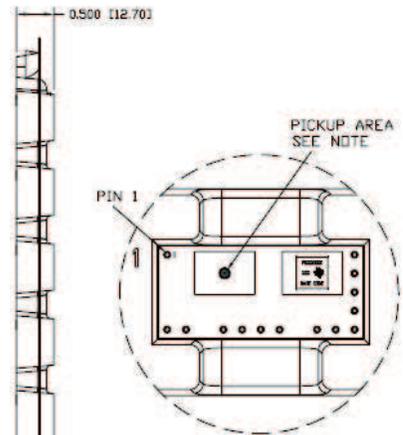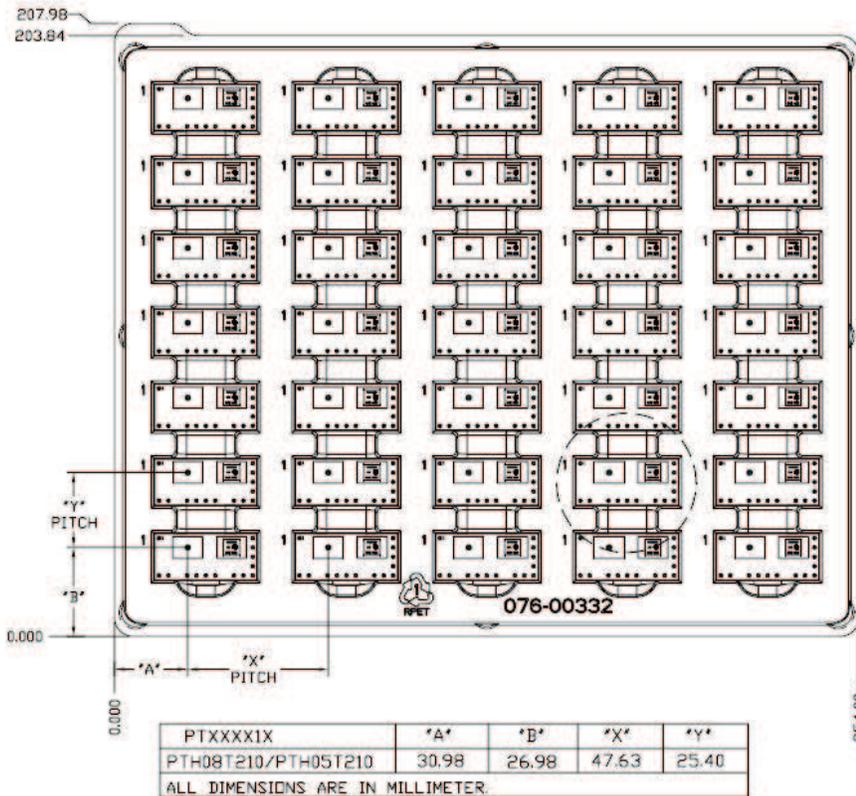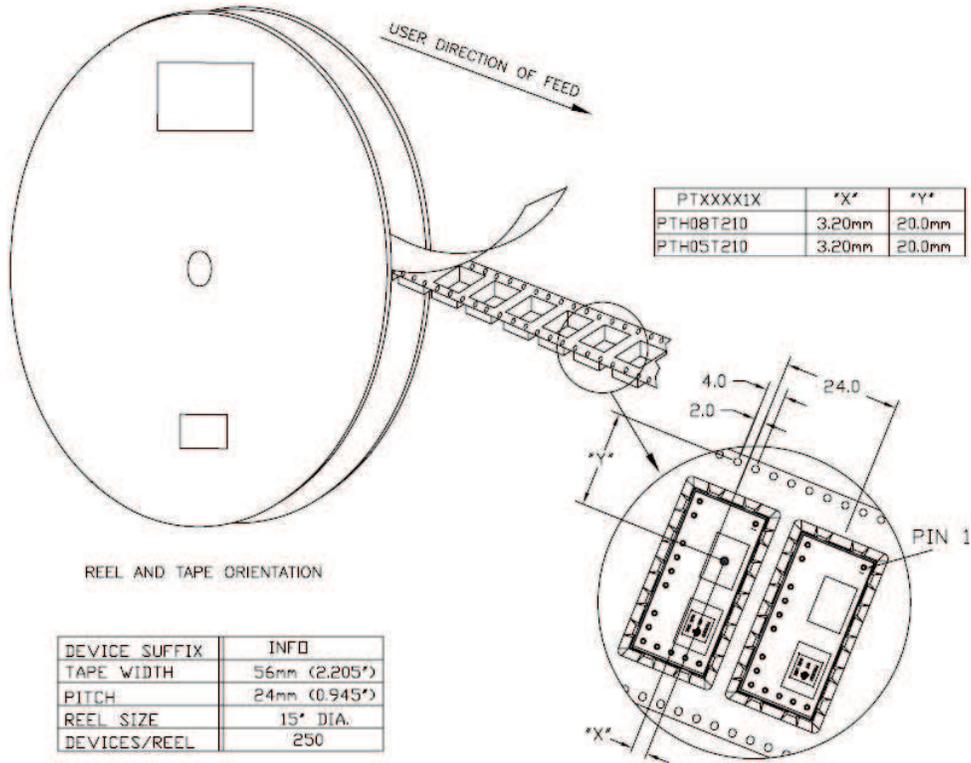

NOTE: THE INDUCTOR IS USED TO PICK AND PLACE THE MODULE. IT'S LOCATION MAY VARY FROM PACKAGE STYLE. SEE PRODUCT TABLE

| | |
|--------------|----|
| DEVICES/TRAY | 35 |
|--------------|----|

PACKAGING INFORMATION

| Orderable Device | Status (1) | Package Type | Package Drawing | Pins | Package Qty | Eco Plan (2) | Lead/Ball Finish (6) | MSL Peak Temp (3) | Op Temp (°C) | Device Marking (4/5) | Samples |
|------------------|---------------|----------------------|-----------------|------|-------------|-----------------|-------------------------|--|--------------|-------------------------|-------------------------|
| PTH08T210WAD | ACTIVE | Through-Hole Module | ECP | 14 | 35 | Pb-Free (RoHS) | SN | Level-1-235C-UNLIM/ Level-3-260C-168HRS | -40 to 85 | | Samples |
| PTH08T210WAH | ACTIVE | Through-Hole Module | ECP | 14 | 35 | Pb-Free (RoHS) | SN | Level-1-235C-UNLIM/ Level-3-260C-168HRS | -40 to 85 | | Samples |
| PTH08T210WAS | ACTIVE | Surface Mount Module | ECQ | 14 | 35 | TBD | SNPB | Level-1-235C-UNLIM/ Level-3-260C-168HRS | -40 to 85 | | Samples |
| PTH08T210WAST | ACTIVE | Surface Mount Module | ECQ | 14 | 250 | TBD | SNPB | Level-1-235C-UNLIM/ Level-3-260C-168HRS | -40 to 85 | | Samples |
| PTH08T210WAZ | ACTIVE | Surface Mount Module | ECQ | 14 | 35 | Pb-Free (RoHS) | SNAGCU | Level-3-260C-168 HR | -40 to 85 | | Samples |
| PTH08T210WAZT | ACTIVE | Surface Mount Module | ECQ | 14 | 250 | Pb-Free (RoHS) | SNAGCU | Level-3-260C-168 HR | -40 to 85 | | Samples |

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

⁽⁶⁾ Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.


Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

MECHANICAL DATA

ECP (R-PDSS-T14)

DOUBLE SIDED MODULE

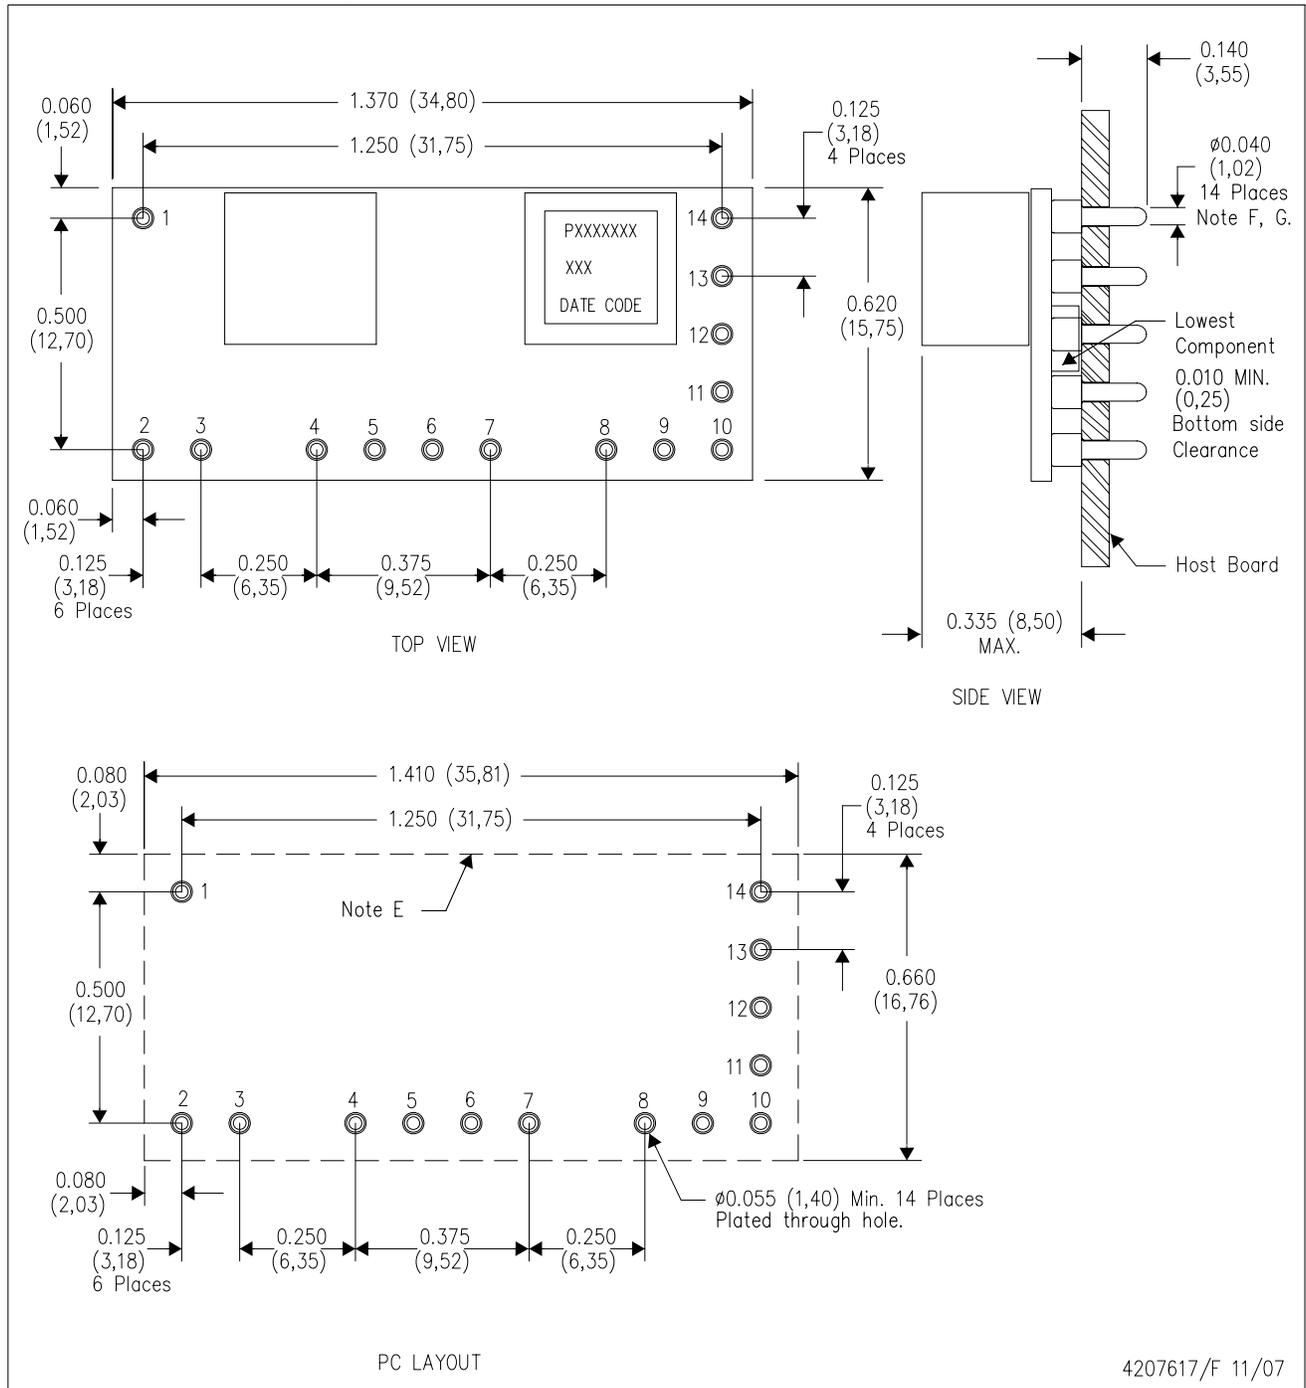


- NOTES:
- A. All linear dimensions are in inches (mm).
 - B. This drawing is subject to change without notice.
 - C. 2 place decimals are ± 0.030 ($\pm 0,76$ mm).
 - D. 3 place decimals are ± 0.010 ($\pm 0,25$ mm).
 - E. Recommended keep out area for user components.

- F. Pins are 0.040" (1,02) diameter with 0.070" (1,78) diameter standoff shoulder.
- G. All pins: Material - Copper Alloy
Finish - Tin (100%) over Nickel plate

ECQ (R-PDSS-B14)

DOUBLE SIDED MODULE

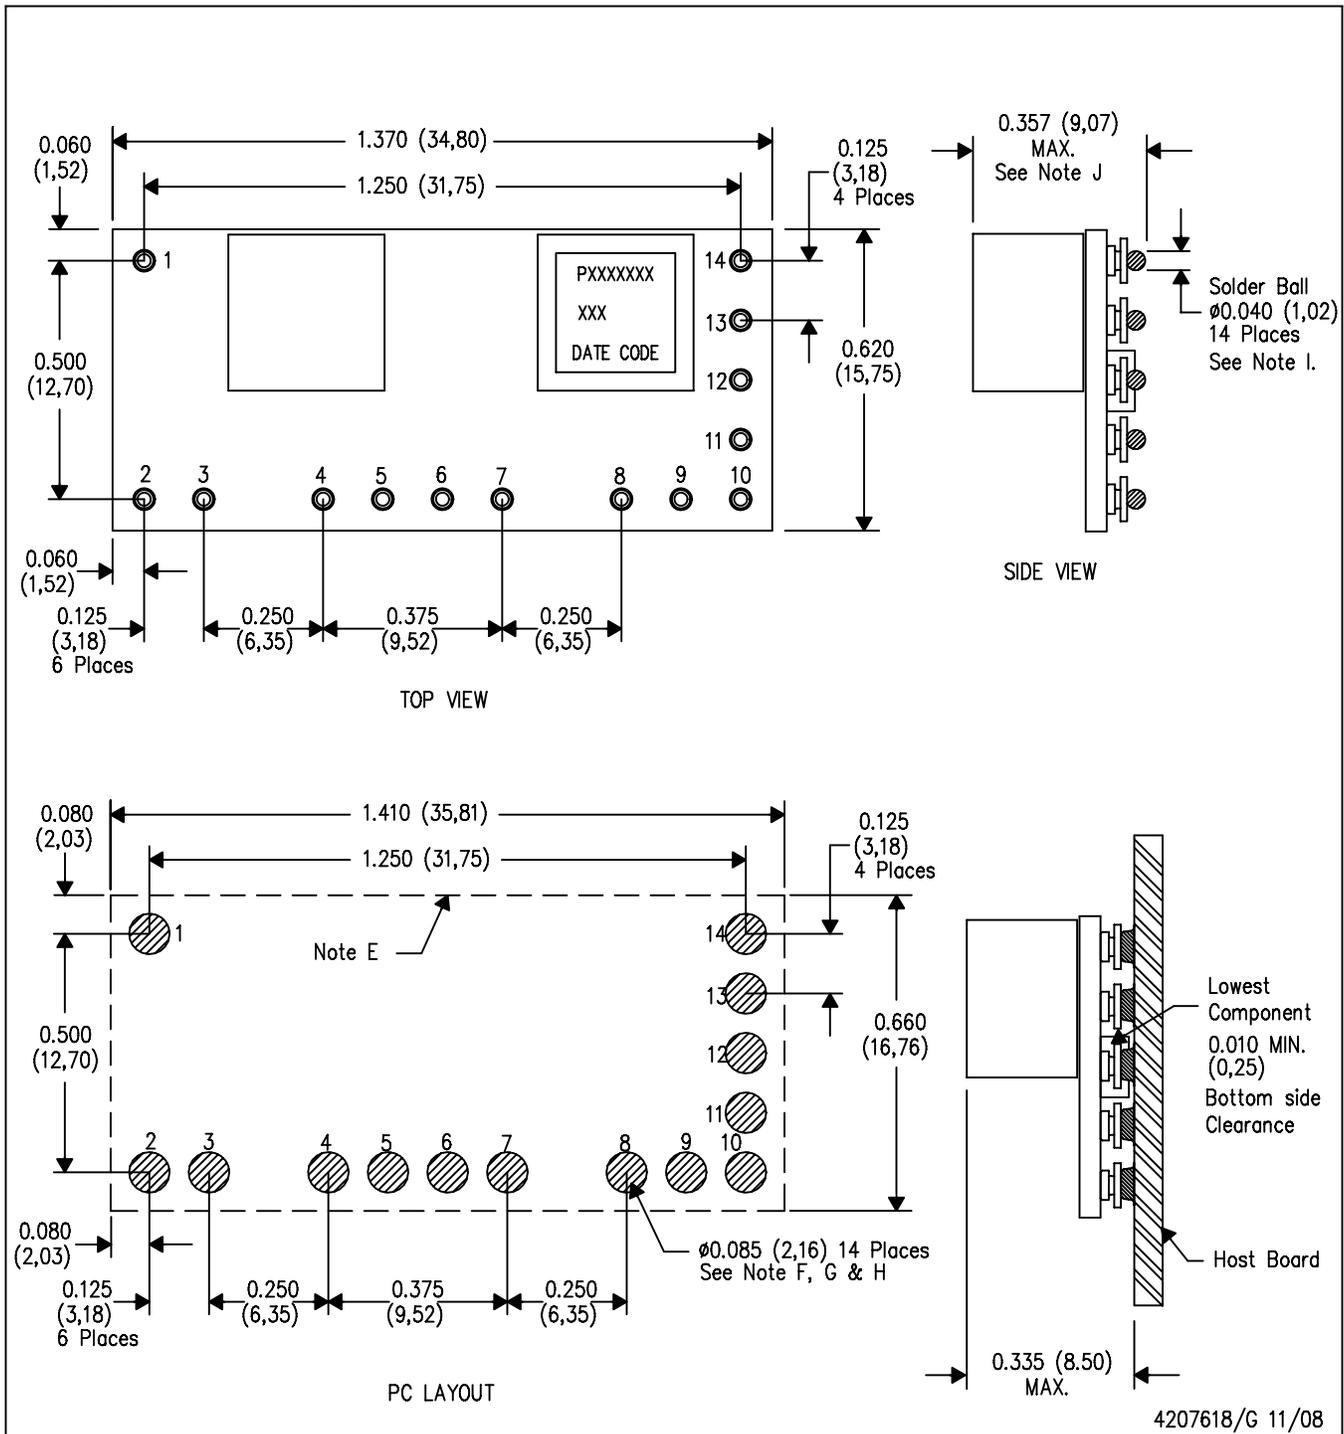

4207618/G 11/08

- NOTES:
- A. All linear dimensions are in inches (mm).
 - B. This drawing is subject to change without notice.
 - C. 2 place decimals are ± 0.030 ($\pm 0,76$ mm).
 - D. 3 place decimals are ± 0.010 ($\pm 0,25$ mm).
 - E. Recommended keep out area for user components.
 - F. Power pin connection should utilize two or more vias to the interior power plane of 0.025 (0,63) I.D. per input, ground and output pin (or the electrical equivalent).
 - G. Paste screen opening: 0.080 (2,03) to 0.085 (2,16).
Paste screen thickness: 0.006 (0,15).
 - H. Pad type: Solder mask defined.
 - I. All pins: Material - Copper Alloy
Finish - Tin (100%) over Nickel plate
Solder Ball - See product data sheet.
 - J. Dimension prior to reflow solder.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products

| | |
|------------------------------|--|
| Audio | www.ti.com/audio |
| Amplifiers | amplifier.ti.com |
| Data Converters | dataconverter.ti.com |
| DLP® Products | www.dlp.com |
| DSP | dsp.ti.com |
| Clocks and Timers | www.ti.com/clocks |
| Interface | interface.ti.com |
| Logic | logic.ti.com |
| Power Mgmt | power.ti.com |
| Microcontrollers | microcontroller.ti.com |
| RFID | www.ti-rfid.com |
| OMAP Applications Processors | www.ti.com/omap |
| Wireless Connectivity | www.ti.com/wirelessconnectivity |

Applications

| | |
|-------------------------------|--|
| Automotive and Transportation | www.ti.com/automotive |
| Communications and Telecom | www.ti.com/communications |
| Computers and Peripherals | www.ti.com/computers |
| Consumer Electronics | www.ti.com/consumer-apps |
| Energy and Lighting | www.ti.com/energy |
| Industrial | www.ti.com/industrial |
| Medical | www.ti.com/medical |
| Security | www.ti.com/security |
| Space, Avionics and Defense | www.ti.com/space-avionics-defense |
| Video and Imaging | www.ti.com/video |

TI E2E Community

e2e.ti.com