

NOTES:

1. ROHS COMPLIANT
2. MATERIALS:
 SOCKET BODY: ALUMINUM ALLOY
 LENS: POLYCARBONATE, UL RATING 94-V2
 WASHER: STEEL, ZINC PLATED, UL RATING 94-V0
 RETAINING NUT: ALUMINUM ALLOY
 WIRE: 24 AWG 1007/1569
 RED = ANODE (+)
 BLACK = CATHODE (-)
3. MOUNTING HOLE: .399±.004 [10.1mm±.1]
4. PANEL THICKNESS: .059 [1.5 mm] MIN TO .320 [8.1 mm] MAX
5. OPERATING TEMPERATURE: -40F [-40C] TO 176F [80C]
6. LED CURRENT OUTPUT: 20mA
7. NUT AND WASHER TO BE PACKAGED SEPERATELY

REVISIONS				
ECN #	REV	DESCRIPTION	DATE	INITIALS
	001	INITIAL RELEASE	10-1-10	SMU
	002	MODS PER ECR 041310AZ01	10/20/10	KH
	003	MORE MODS PER ECR 041310AZ01	11/1/10	KH

CNX 480 CABLE ASSEMBLY
ORDERING CODE (EXAMPLE):

CNX 480 X XXX XX




SOCKET BODY ANODIZED FINISH	
1	BLACK
2	CLEAR

LENS COLOR**	
RTP	RED TRANSPARENT
GTP	GREEN TRANSPARENT
CTP	CLEAR TRANSPARENT
BTP	BLUE TRANSPARENT
YTP	YELLOW TRANSPARENT

WIRE LENGTH CODE	
12	12.0" [305 mm]
24	24.0" [610 mm]

LED OUTPUT		
LED COLOR**	TYP INTENSITY, mcd	FORWARD VOLTAGE, V (Typ)
RED	245-345	1.8
GREEN	345-485	1.9
WHITE	3500-4900	2.8
BLUE	950-1300	3.0
YELLOW	280-380	1.9

*CALL FACTORY FOR
ADDITIONAL OPTIONS.
 **LED COLOR SAME AS THE LENS
 COLOR. EX: A RED LENS COMES
 WITH A RED LED.

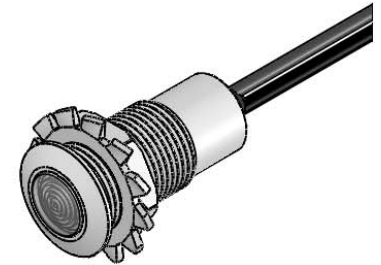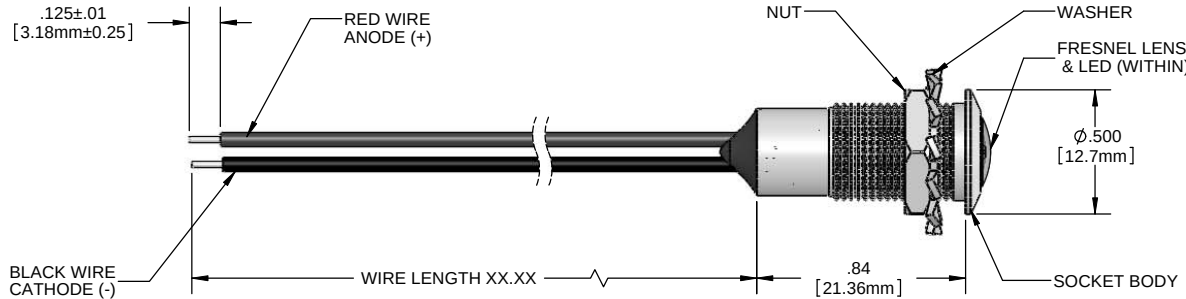

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE: DECIMALS ±.000 THIRD ANGLE PROJECTION THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VISUAL COMMUNICATIONS COMPANY, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF VISUAL COMMUNICATIONS COMPANY, INC IS PROHIBITED.	MATERIAL SEE NOTES		VISUAL COMMUNICATIONS COMPANY, INC. 190 Bosstick Boulevard, Suite 101 San Marcos, CA 92069 USA Phone (760) 560-1300 Fax (760) 560-1301 Email: vccsales@vccilite.com		
	FINISH NONE		TITLE: CNX 480 ASSEMBLY		
	APPROVAL	DATE	SIZE	DWG. NO.	REV
	DRAWN SMU	10-6-10	B	CNX 480 X XXX XX	003
CHECKED DZ 10-6-10			SCALE: 1:0.5		SHEET 1 OF 1
DO NOT SCALE DRAWING					