


Solid Tantalum Chip Capacitors MIDGET® Conformal Coated

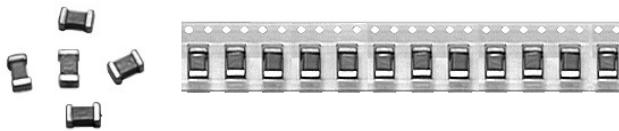

PERFORMANCE CHARACTERISTICS

Operating Temperature: - 55 °C to + 85 °C
(To + 125 °C with voltage derating)

Note: Refer to Doc. 40088

FEATURES

- 8 mm, 12 mm, 16 mm tape and reel packaging available per EIA-481-1 and reeling per IEC 286-3, 7" [178 mm] standard



RoHS*
COMPLIANT

Capacitance Range: 0.10 µF - 150 µF

Capacitance Tolerance: ± 10 %, ± 20 % standard


Voltage Rating: 4 WVDC to 50 WVDC

ORDERING INFORMATION

194D	225	X0	004	A	2	T
TYPE	CAPACITANCE	CAPACITANCE TOLERANCE	DC VOLTAGE RATING AT + 85 °C	CASE CODE	TERMINATION	PACKAGING
This is expressed in picofarads. The first two digits are the significant figures. The third is the number of zeros to follow	X0 = ± 20 % X9 = ± 10 % X5 = ± 5 % Special Order	This is expressed in volts. To complete the three-digit block, zeros precede the voltage rating	See Ratings and Case Codes Table	2 = Gold Plated Standard. (RoHS compliant) (50 µ inch minimum) 8 = 60/40 Solder Plated 7 = Hot Solder Dipped	T = T/R (full reel) 7" [178] Reel standard. H = T/R (half reel) 7" [178] B = Bulk See Tape and Reel Specifications	

Note: Preferred Tolerance and reel sizes are in bold.
We reserve the right to supply higher voltage ratings and tighter capacitance tolerance capacitors in the same case size. Voltage substitutions will be marked with the higher voltage rating.

DIMENSIONS in inches [millimeters]

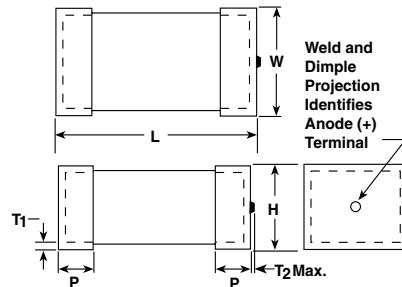

CASE CODE	W	L	H	P	T ₁	T ₂ (MAX.)
A	0.050 ± 0.015 [1.27 ± 0.38]	0.100 ± 0.015 [2.54 ± 0.38]	0.050 ± 0.015 [1.27 ± 0.38]	0.030 ± 0.005 [0.76 ± 0.13]	0.005 [0.13]	0.015 [0.38]
B	0.050 ± 0.015 [1.27 ± 0.38]	0.150 ± 0.015 [3.81 ± 0.38]	0.050 ± 0.015 [1.27 ± 0.38]	0.030 ± 0.005 [0.76 ± 0.13]	0.005 [0.13]	0.015 [0.38]
C	0.050 ± 0.015 [1.27 ± 0.38]	0.200 ± 0.015 [5.08 ± 0.38]	0.050 ± 0.015 [1.27 ± 0.38]	0.030 ± 0.005 [0.76 ± 0.13]	0.005 [0.13]	0.015 [0.38]
D	0.100 ± 0.015 [2.54 ± 0.38]	0.150 ± 0.015 [3.81 ± 0.38]	0.050 ± 0.015 [1.27 ± 0.38]	0.030 ± 0.005 [0.76 ± 0.13]	0.005 [0.13]	0.015 [0.38]
E	0.100 ± 0.015 [2.54 ± 0.38]	0.200 ± 0.015 [5.08 ± 0.38]	0.050 ± 0.015 [1.27 ± 0.38]	0.030 ± 0.005 [0.76 ± 0.13]	0.005 [0.13]	0.015 [0.38]
F	0.135 ± 0.015 [3.43 ± 0.38]	0.220 ± 0.015 [5.59 ± 0.38]	0.070 ± 0.015 [1.78 ± 0.38]	0.030 ± 0.005 [0.76 ± 0.13]	0.005 [0.13]	0.015 [0.38]
G	0.110 ± 0.015 [2.79 ± 0.38]	0.265 ± 0.015 [6.73 ± 0.38]	0.110 ± 0.015 [2.79 ± 0.38]	0.050 ± 0.005 [1.27 ± 0.13]	0.005 [0.13]	0.015 [0.38]
H	0.150 ± 0.015 [3.81 ± 0.38]	0.285 ± 0.015 [7.24 ± 0.38]	0.110 ± 0.015 [2.79 ± 0.38]	0.050 ± 0.005 [1.27 ± 0.13]	0.005 [0.13]	0.015 [0.38]

Note: When solder coated terminations are required, add 0.015" [0.381] to termination dimension tolerances

* Pb containing terminations that are not RoHS compliant, exemptions may apply.

**194D/CTC1 RATINGS AND CASE CODES**

µF	4 V	6 V/6.3 V**	10 V	15 V/16 V**	20 V	25 V	35 V/40 V**	50 V
0.10							A	A*
0.15							A	A
0.22							A	B*
0.33						A	B	B
0.47					A	A/B	B	C
0.68				A	A/B	B	C	D
1.0		A	A/B	A/B	A/B	C	D	E
1.5	A	A/B	A/B	A/B	B/C	D	E	F*
2.2	A/B	A/B	B/C	C/D	C/D	E	F	F
3.3	A/B	A/B	B/C	C/D	D/E	F	F	G
4.7	B	B/C	C/D	D/E	E/F	F	F/G	H
6.8	B/C	C/D	D/E	E/F	F	F/G*	G/H	H
10	C/D	D/E	E/F	E/F	F/G	F/G	H	
15	D/E	E/F	E/F	F/G	G	H	H	
22	E/F	F	F/G	F/G	H	H		
33	F	F/G	F/G	G/H	H			
47	F/G	F/G	G/H	H				
68	F/G	G/H	H	H				
100	H	H	H					
120	H	H	H					
150	H	H						

* only available in 194D

** CECC voltages are 6.3 volts, 16 volts and 40 volts. 20 volts range only available in 194D

Extended range values not available in CECC styles

STANDARD/EXTENDED RATINGS

CAPACITANCE (µF)	CASE CODE	PART NUMBER*	MAX. DCL AT + 25 °C (µA)	MAX. DF AT + 25 °C 120 Hz (%)
4 WVDC AT + 85 °C, SURGE = 5 V . . . 2.7 WVDC AT + 125 °C, SURGE = 3.4 V				
2.2	A	194D225X_004A2	0.5	6
3.3	A	194D335X_004A2	0.5	6
3.3	B	194D335X_004B2	0.5	6
4.7	B	194D475X_004B2	0.5	6
6.8	B	194D685X_004B2	0.5	6
6.8	C	194D685X_004C2	0.5	6
10	C	194D106X_004C2	0.5	6
10	D	194D106X_004D2	0.5	6
15	D	194D156X_004D2	0.6	6
15	E	194D156X_004E2	0.6	6
22	E	194D226X_004E2	0.9	6
22	F	194D226X_004F2	0.9	6
33	F	194D336X_004F2	1.3	6
47	F	194D476X_004F2	1.9	6
47	G	194D476X_004G2	1.9	6
68	F	194D686X_004F2	2.7	6
68	G	194D686X_004G2	2.7	6
100	H	194D107X_004H2	4.0	8
120	H	194D127X_004H2	4.8	8
150	H	194D157X_004H2	6.0	8

* Preliminary values, contact factory for availability. For 10 % tolerance, specify "9"; for 20 % tolerance, change to "0".

STANDARD/EXTENDED RATINGS				
CAPACITANCE (μF)	CASE CODE	PART NUMBER*	MAX. DCL AT + 25 °C (μA)	MAX. DF AT + 25 °C 120 Hz (%)
6 WVDC AT + 85 °C, SURGE = 8 V . . . 4 WVDC AT + 125 °C, SURGE = 5 V				
1.5	A	194D155X_006A2	0.5	6
2.2	A	194D225X_006A2	0.5	6
2.2	B	194D225X_006B2	0.5	6
3.3	A	194D335X_006A2	0.5	6
3.3	B	194D335X_006B2	0.5	6
4.7	B	194D475X_006B2	0.5	6
4.7	C	194D475X_006C2	0.5	6
6.8	C	194D685X_006C2	0.5	6
6.8	D	194D685X_006D2	0.5	6
10	D	194D106X_006D2	0.6	6
10	E	194D106X_006E2	0.6	6
6 WVDC AT + 85 °C, SURGE = 8 V . . . 4 WVDC AT + 125 °C, SURGE = 5 V				
15	E	194D156X_006E2	1.0	6
15	F	194D156X_006F2	1.0	6
22	F	194D226X_006F2	1.4	6
33	F	194D336X_006F2	2.1	6
33	G	194D336X_006G2	2.1	6
47	F	194D476X_006F2	3.0	6
47	G	194D476X_006G2	3.0	6
68	G	194D686X_006G2	4.3	6
68	H	194D686X_006H2	4.3	6
100	H	194D107X_006H2	6.0	8
120	H	194D127X_006H2	7.2	8
150	H	194D157X_006H2	9.0	8
10 WVDC AT + 85 °C, SURGE = 13 V . . . 7 WVDC AT + 125 °C, SURGE = 9 V				
1.0	A	194D105X_010A2	0.5	4
1.5	A	194D155X_010A2	0.5	6
1.5	B	194D155X_010B2	0.5	6
2.2	A	194D225X_010A2	0.5	6
2.2	B	194D225X_010B2	0.5	6
3.3	B	194D335X_010B2	0.5	6
3.3	C	194D335X_010C2	0.5	6
4.7	C	194D475X_010C2	0.5	6
4.7	D	194D475X_010D2	0.5	6
6.8	D	194D685X_010D2	0.7	6
6.8	E	194D685X_010E2	0.7	6
10	E	194D106X_010E2	1.0	6
10	F	194D106X_010F2	1.0	6
15	E	194D156X_010E2	1.5	6
15	F	194D156X_010F2	1.5	6
22	F	194D226X_010F2	2.2	6
22	G	194D226X_010G2	2.2	6
33	F	194D336X_010F2	3.3	6
33	G	194D336X_010G2	3.3	6
47	G	194D476X_010G2	4.7	6
47	H	194D476X_010H2	4.7	6
68	H	194D686X_010H2	6.8	6
100	H	194D107X_010H2	10	8
120	H	194D127X_010H2	12	8

* Preliminary values, contact factory for availability. For 10 % tolerance, specify "9"; for 20 % tolerance, change to "0".

**STANDARD/EXTENDED RATINGS**

CAPACITANCE (μF)	CASE CODE	PART NUMBER*	MAX. DCL AT + 25 °C (μA)	MAX. DF AT + 25 °C 120 Hz (%)
15 WVDC AT + 85 °C, SURGE = 20 V . . . 10 WVDC AT + 125 °C, SURGE = 12 V				
0.68	A	194D684X_015A2	0.5	4
1.0	A	194D105X_015A2	0.5	4
1.0	B	194D105X_015B2	0.5	4
1.5	A	194D155X_015A2	0.5	6
1.5	B	194D155X_015B2	0.5	6
2.2	B	194D225X_015B2	0.5	6
2.2	C	194D225X_015C2	0.5	6
3.3	C	194D335X_015C2	0.5	6
3.3	D	194D335X_015D2	0.5	6
4.7	D	194D475X_015D2	0.7	6
4.7	E	194D475X_015E2	0.7	6
6.8	E	194D685X_015E2	1.1	6
6.8	F	194D685X_015F2	1.1	6
10	E	194D106X_015E2	1.6	6
10	F	194D106X_015F2	1.6	6
15	F	194D156X_015F2	2.4	6
15	G	194D156X_015G2	2.4	6
22	F	194D226X_015F2	3.5	6
22	G	194D226X_015G2	3.5	6
33	G	194D336X_015G2	5.3	6
33	H	194D336X_015H2	5.3	6
47	H	194D476X_015H2	7.0	6
68	H	194D686X_015H2	10	6
20 WVDC AT + 85 °C, SURGE = 26 V . . . 13 WVDC AT + 125 °C, SURGE = 16 V				
0.47	A	194D474X_020A2	0.5	4
0.68	A	194D684X_020A2	0.5	4
0.68	B	194D684X_020B2	0.5	4
1.0	A	194D105X_020A2	0.5	4
1.0	B	194D105X_020B2	0.5	4
1.5	B	194D155X_020B2	0.5	6
1.5	C	194D155X_020C2	0.5	6
2.2	C	194D225X_020C2	0.5	6
2.2	D	194D225X_020D2	0.5	6
3.3	D	194D335X_020D2	0.7	6
3.3	E	194D335X_020E2	0.7	6
4.7	E	194D475X_020E2	0.9	6
4.7	F	194D475X_020F2	0.9	6
6.8	F	194D685X_020F2	1.4	6
10	F	194D106X_020F2	2.0	6
10	G	194D106X_020G2	2.0	6
15	G	194D156X_020G2	3.0	6
22	H	194D226X_020H2	4.4	6
33	H	194D336X_020H2	6.6	6

* Preliminary values, contact factory for availability. For 10 % tolerance, specify "9"; for 20 % tolerance, change to "0".

STANDARD/EXTENDED RATINGS

CAPACITANCE (μF)	CASE CODE	PART NUMBER*	MAX. DCL AT + 25 °C (μA)	MAX. DF AT + 25 °C 120 Hz (%)
25 WVDC AT + 85 °C, SURGE = 32 V . . . 17 WVDC AT + 125 °C, SURGE = 20 V				
0.33	A	194D334X_025A2	0.5	4
0.47	A	194D474X_025A2	0.5	4
0.47	B	194D474X_025B2	0.5	4
0.68	B	194D684X_025B2	0.5	4
1.0	C	194D105X_025C2	0.5	4
1.5	D	194D155X_025D2	0.5	6
2.2	E	194D225X_025E2	0.6	6
3.3	F	194D335X_025F2	0.8	6
4.7	F	194D475X_025F2	1.2	6
6.8	F	194D685X_025F2	1.7	6
6.8	G	194D685X_025G2	1.7	6
10	F	194D106X_025F2	2.5	6
10	G	194D106X_025G2	2.5	6
15	H	194D156X_025H2	3.8	6
22	H	194D226X_025H2	5.5	6
35 WVDC AT + 85 °C, SURGE = 46 V . . . 23 WVDC AT + 125 °C, SURGE = 28 V				
0.10	A	194D104X_035A2	0.5	4
0.15	A	194D154X_035A2	0.5	4
0.22	A	194D224X_035A2	0.5	4
0.33	B	194D334X_035B2	0.5	4
0.47	B	194D474X_035B2	0.5	4
0.68	C	194D684X_035C2	0.5	4
1.0	D	194D105X_035D2	0.5	4
1.5	E	194D155X_035E2	0.5	6
2.2	F	194D225X_035F2	0.8	6
3.3	F	194D335X_035F2	1.2	6
4.7	F	194D475X_035F2	1.6	6
4.7	G	194D475X_035G2	1.6	6
6.8	G	194D685X_035G2	2.4	6
6.8	H	194D685X_035H2	2.4	6
10	H	194D106X_035H2	3.5	6
15	H	194D156X_035H2	5.3	6
50 WVDC AT + 85 °C, SURGE = 65 V . . . 33 WVDC AT + 125 °C, SURGE = 38 V				
0.10	A	194D104X_050A2	0.5	4
0.15	A	194D154X_050A2	0.5	4
0.22	B	194D224X_050B2	0.5	4
0.33	B	194D334X_050B2	0.5	4
0.47	C	194D474X_050C2	0.5	4
0.68	D	194D684X_050D2	0.5	4
1.0	E	194D105X_050E2	0.5	4
1.5	F	194D155X_050F2	0.8	6
2.2	F	194D225X_050F2	1.1	6
3.3	G	194D335X_050G2	1.7	6
4.7	H	194D475X_050H2	2.4	6
6.8	H	194D685X_050H2	3.4	6

* Preliminary values, contact factory for availability. For 10 % tolerance, specify "9"; for 20 % tolerance, change to "0".



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.