

NTC Thermistors, Long Insulated Leads



FEATURES

- Long and flexible leads for special mounting or assembly requirements
- Insulated leads for prevention of short circuits
- Electrical features of 'accuracy line' sensors
- Small diameter
- Old part number was 2322 640 90059
- Components in accordance with RoHS 2002/95/EC and WEEE 2002/96/EC

APPLICATIONS

- Temperature sensing and control

These thermistors have a negative temperature coefficient. The device consists of a chip with two insulated nickel leads.

PACKAGING

The thermistors are packed in cardboard boxes; the smallest packing quantity is 1000 units.


MARKING

The body is coated with ochre-colored epoxy lacquer and is not marked.

MOUNTING

By soldering in any position

DIMENSIONS in millimeters

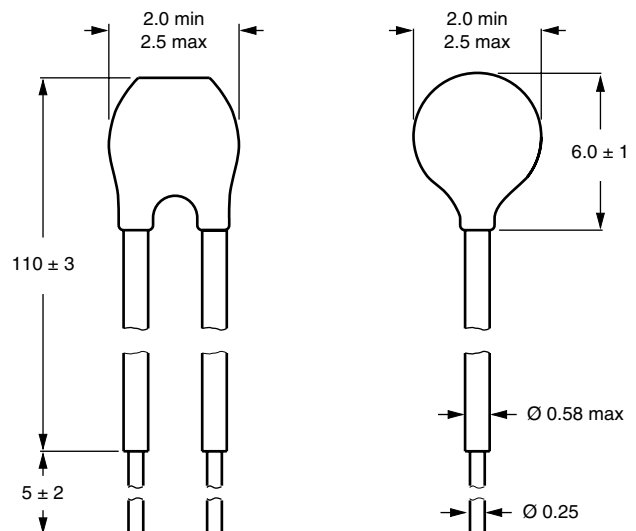

QUICK REFERENCE DATA	
PARAMETER	VALUE
Resistance value at:	
0 °C	9000 Ω
25 °C	2769 Ω
Tolerance on R ₂₅ - value:	
0 °C	± 2 %
25 °C	± 3.82 %
B _{25/85} - value	3977 K
Maximum dissipation	100 mW
Dissipation factor δ	1.35 mW/K
Minimum dielectric withstanding voltage (RMS) between leads and coating	500 V
Response time	1.25 s
Operating temperature range:	
at zero power	- 40 to + 125 °C
at maximum power	0 to + 55 °C
Climatic category	40/125/56
Mass	≈ 0.16 g

**RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES**

T_{OPER} (°C)	RESISTANCE (Ω)	TCR (%/K)	RESISTANCE TOLERANCE (%)
- 40	90 923	6.57	± 5.60
- 35	65 808	6.35	± 5.09
- 30	48 141	6.15	± 4.60
- 25	35 578	5.95	± 4.13
- 20	26 550	5.76	± 3.67
- 15	19 998	5.58	± 3.23
- 10	15 197	5.40	± 2.81
- 5	11 648	5.24	± 2.40
0	9000	5.08	± 2.00
5	7008.6	4.92	± 2.38
10	5498.8	4.78	± 2.76
15	4345.1	4.64	± 3.12
20	3457.2	4.50	± 3.47
25	2769.0	4.37	± 3.82
30	2231.7	4.25	± 4.16
35	1809.6	4.13	± 4.48
40	1476.0	4.02	± 4.80
45	1210.6	3.91	± 5.12
50	998.37	3.80	± 5.42
55	827.59	3.70	± 5.72
60	689.46	3.60	± 6.01
65	577.15	3.51	± 6.29
70	485.38	3.42	± 6.57
75	410.02	3.33	± 6.84
80	347.86	3.25	± 7.10
85	296.35	3.16	± 7.36
90	253.47	3.09	± 7.61
95	217.64	3.01	± 7.86
100	187.57	2.94	± 8.10
105	162.24	2.87	± 8.33
110	140.81	2.80	± 8.56
115	122.63	2.73	± 8.79
120	107.14	2.67	± 9.01
125	93.90	2.61	± 9.22



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.