

NTC Thermistors, Molded Range



FEATURES

- Excellent for surface temperature measurement
- Designed for harsh environments
- Based on the "2322 640 0...." naked thermistor chips.
- Old part number was 2322 641 6....
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC

APPLICATIONS

- Temperature control.

These thermistors have a negative temperature coefficient. The device consists of a moulded chip with two tin-plated solid nickel leads. The body color is white and the device is non-flammable.

PACKAGING

The smallest packing quantity is 500 units.

MARKING

White colored body.

MOUNTING

By soldering in any position or mechanical fixing.

QUICK REFERENCE DATA

PARAMETER	VALUE
Resistance value at 25 °C (R_{25})	2.2 to 470 k Ω
Tolerance on R_{25} - value	$\pm 2\%$, $\pm 3\%$, $\pm 5\%$, $\pm 10\%$
$B_{25/85}$ - values	3740 to 4570 K
Maximum dissipation	250 mW
Response time	≈ 2.7 s
Operating temperature range: at zero dissipation at maximum dissipation	- 40 to + 125 °C 0 to 55 °C
Minimum dielectric withstanding voltage (RMS) between leads and lead insulation	350 V
Minimum insulation resistance between leads and lead insulation at 100 V (DC)	100 M Ω
Climatic category	40/125/56
Mass	≈ 0.3 g

ELECTRICAL DATA AND ORDERING INFORMATION

R_{25} (k Ω)	TC (%/K)	MASS (g)	W (mm)	H (mm)	L (mm)	P (mm)	T (mm)	D (mm)	$B_{25/85}$		12 NC 2381 641 ⁽²⁾	SAP PART NO. NTCLM101E3 ⁽³⁾
									K	TOL. (%)		
2.2	- 4.37	≈ 0.3	4 ± 0.2	4.4 ± 0.2	21 ± 1	2.54 ± 0.3	2.5 ± 0.2	0.6 ± 0.15	3977	± 0.75	6.222	222*B0
2.7	- 4.37	≈ 0.3	4 ± 0.2	4.4 ± 0.2	21 ± 1	2.54 ± 0.3	2.5 ± 0.2	0.6 ± 0.15	3977	± 0.75	6.272	272*B0
12	- 4.10	≈ 0.3	4 ± 0.2	4.4 ± 0.2	21 ± 1	2.54 ± 0.3	2.5 ± 0.2	0.6 ± 0.15	3740	± 2.0	6.123	123*B0
15	- 4.10	≈ 0.3	4 ± 0.2	4.4 ± 0.2	21 ± 1	2.54 ± 0.3	2.5 ± 0.2	0.6 ± 0.15	3740	± 2.0	6.153	153*B0
33	- 4.46	≈ 0.3	4 ± 0.2	4.4 ± 0.2	21 ± 1	2.54 ± 0.3	2.5 ± 0.2	0.6 ± 0.15	4090	± 1.5	6.333	333*B0
100	- 4.57	≈ 0.3	4 ± 0.2	4.4 ± 0.2	21 ± 1	2.54 ± 0.3	2.5 ± 0.2	0.6 ± 0.15	4190	± 1.5	6.104	104*B0
470	- 4.95	≈ 0.3	4 ± 0.2	4.4 ± 0.2	21 ± 1	2.54 ± 0.3	2.5 ± 0.2	0.6 ± 0.15	4570	± 1.5	6.474	474*B0

Note

- R_{25} - values, TC, mass, dimensions and catalog numbers.
 - Other R_{25} - values are available on request.
- Replace dot in the code numbers by one of the following, depending on required R_{25} - value:
 - 4 for a tolerance of $\pm 2\%$
 - 6 for a tolerance of $\pm 3\%$
 - 3 for a tolerance of $\pm 5\%$
 - 2 for a tolerance of $\pm 10\%$
- Replace * by G for a tolerance of 2 %, H for 3 %, J for 5 % and K for 10 %

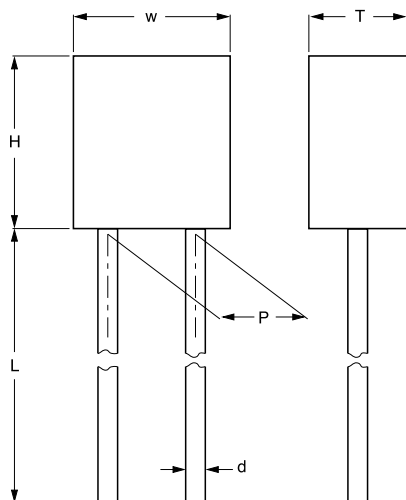
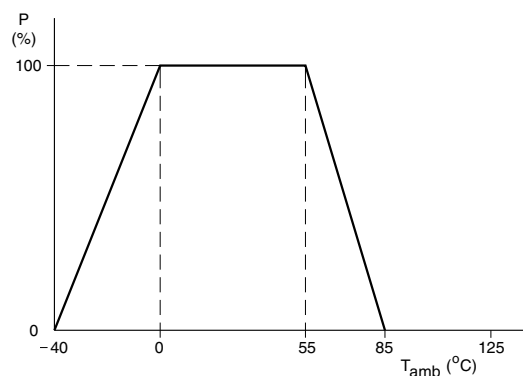
DIMENSIONS in millimeters

Fig.1 Component outline.

DERATING

Power derating curve.

For dimensions see Electrical Data and Ordering Information Table

RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES

T _{OPER} (°C)	R _T /R ₂₅	ΔR DUE TO B-TOLERANCE (%)	TC (%/K)	R _T (Ω)	
				2381 641 ⁽¹⁾	
				6.222	6.272
- 40	33.21	2.66	- 6.57	73 062	89 667
- 35	23.99	2.41	- 6.36	52 779	64 774
- 30	17.52	2.17	- 6.15	38 545	47 305
- 25	12.93	1.94	- 5.95	28 444	34 908
- 20	9.636	1.71	- 5.76	21 199	26 017
- 15	7.250	1.50	- 5.58	15 950	19 575
- 10	5.505	1.29	- 5.40	12 110	14 863
- 5	4.216	1.08	- 5.24	9275	11 383
0	3.255	0.89	- 5.08	7162	8790
5	2.534	0.70	- 4.92	5575	6842
10	1.987	0.52	- 4.78	4372	5366
15	1.570	0.34	- 4.64	3454	4239
20	1.249	0.17	- 4.50	2747	3372
25	1.000	0.00	- 4.37	2200	2700
30	0.8059	0.16	- 4.25	1773	2176
35	0.6535	0.32	- 4.13	1438	1764
40	0.5330	0.47	- 4.02	1173	1439
45	0.4372	0.62	- 3.91	961.8	1180
50	0.3605	0.77	- 3.80	793.2	973.4
55	0.2989	0.91	- 3.70	657.5	807.0
60	0.2490	1.05	- 3.60	547.8	672.3
65	0.2084	1.18	- 3.51	458.6	562.8
70	0.1753	1.31	- 3.42	385.7	473.3
75	0.1481	1.44	- 3.33	325.8	399.9
80	0.1256	1.57	- 3.25	276.4	339.2
85	0.1070	1.69	- 3.16	235.5	289.0
90	0.09154	1.81	- 3.09	201.4	247.2
95	0.07860	1.93	- 3.01	172.9	212.2
100	0.06773	2.04	- 2.94	149.0	182.9
105	0.05858	2.15	- 2.87	128.9	158.2
110	0.05083	2.26	- 2.80	111.8	137.2
115	0.04426	2.37	- 2.73	97.37	119.5
120	0.03866	2.47	- 2.67	85.05	104.4
125	0.03387	2.57	- 2.61	74.52	91.46

**RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES**

T _{OPER} (°C)	R _T /R ₂₅	ΔR DUE TO B-TOLERANCE (%)	TC (%/K)	R _T (Ω)	
				2381 641 ⁽¹⁾	
				6.123	6.153
- 40	25.78	6.81	- 6.09	309 403	386 754
- 35	19.13	6.16	- 5.89	229 509	286 887
- 30	14.32	5.53	- 5.70	171 844	214 805
- 25	10.82	4.93	- 5.52	129 828	162 285
- 20	8.245	4.35	- 5.35	98 935	123 669
- 15	6.335	3.80	- 5.19	76 020	95 025
- 10	4.907	3.26	- 5.03	58 880	73 600
- 5	3.830	2.74	- 4.88	45 954	57 443
0	3.011	2.24	- 4.73	36 130	45 163
5	2.384	1.76	- 4.60	28 607	35 759
10	1.900	1.30	- 4.46	22 805	28 506
15	1.525	0.85	- 4.34	18 298	22 872
20	1.231	0.42	- 4.21	14 774	18 467
25	1.000	0.00	- 4.10	12 000	15 000
30	0.8171	0.41	- 3.98	9804	12 255
35	0.6712	0.80	- 3.88	8054	10 068
40	0.5543	1.19	- 3.77	6652	8315
45	0.4602	1.57	- 3.67	5522	6903
50	0.3839	1.94	- 3.57	4607	5759
55	0.3219	2.30	- 3.48	3862	4828
60	0.2710	2.65	- 3.39	3252	4066
65	0.2293	2.99	- 3.30	2751	3439
70	0.1947	3.33	- 3.22	2337	2921
75	0.1661	3.66	- 3.14	1993	2492
80	0.1422	3.98	- 3.06	1707	2134
85	0.1223	4.29	- 2.99	1467	1834
90	0.1055	4.60	- 2.92	1266	1583
95	0.09135	4.90	- 2.85	1096	1370
100	0.07937	5.19	- 2.78	952.2	1190
105	0.06919	5.48	- 2.71	830.2	1038
110	0.06050	5.76	- 2.65	726.0	907.5
115	0.05307	6.04	- 2.59	636.9	796.1
120	0.04670	6.31	- 2.53	560.4	700.5
125	0.04121	6.57	- 2.47	494.5	618.1

RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES

T _{OPER} (°C)	R _T /R ₂₅	ΔR DUE TO B-TOLERANCE (%)	TC (%/K)	R _T (Ω)	
				2381 641 ⁽¹⁾	
				6.104	
- 40	36.66	5.69	- 6.70	3 666 321	
- 35	26.38	5.15	- 6.49	2 637 604	
- 30	19.17	4.63	- 6.29	1 916 588	
- 25	14.06	4.13	- 6.10	1 406 120	
- 20	10.41	3.65	- 5.92	1 041 190	
- 15	7.779	3.18	- 5.74	777 851	
- 10	5.861	2.73	- 5.57	586 100	
- 5	4.453	2.30	- 5.41	445 260	
0	3.409	1.88	- 5.26	340 944	
5	2.631	1.48	- 5.11	263 055	
10	2.044	1.09	- 4.97	204 447	
15	1.600	0.72	- 4.83	160 015	
20	1.261	0.35	- 4.70	126 087	
25	1.000	0.00	- 4.57	100 000	

RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES

T _{OPER} (°C)	R _T /R ₂₅	ΔR DUE TO B-TOLERANCE (%)	TC (%/K)	R _T (Ω)
				2381 641 ⁽¹⁾
				6.104
30	0.7981	0.34	- 4.45	79 808
35	0.6408	0.67	- 4.35	64 077
40	0.5175	1.00	- 4.22	51 746
45	0.4202	1.32	- 4.11	42 021
50	0.3431	1.63	- 4.00	34 308
55	0.2816	1.93	- 3.90	28 156
60	0.2322	2.22	- 3.80	23 223
65	0.1925	2.51	- 3.71	19 246
70	0.1602	2.79	- 3.62	16 025
75	0.1340	3.06	- 3.53	13 402
80	0.1126	3.33	- 3.45	11 258
85	0.09496	3.59	- 3.36	9496
90	0.08042	3.85	- 3.28	8042
95	0.06837	4.10	- 3.21	6837
100	0.05835	4.35	- 3.13	5835
105	0.04998	4.59	- 3.06	4998
110	0.04296	4.82	- 2.99	4296
115	0.03705	5.05	- 2.92	3705
120	0.03206	5.28	- 2.86	3206
125	0.02783	5.50	- 2.80	2783

RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES

T _{OPER} (°C)	R _T /R ₂₅	ΔR DUE TO B-TOLERANCE (%)	TC (%/K)	R _T (Ω)
				2381 641 ⁽¹⁾
				6.474
- 40	48.62	6.22	- 7.13	22 849 885
- 35	34.19	5.63	- 6.91	16 068 156
- 30	24.28	5.06	- 6.71	11 412 861
- 25	17.42	4.51	- 6.52	8 185 271
- 20	12.61	3.98	- 6.33	5 925 780
- 15	9.211	3.47	- 6.15	4 329 092
- 10	6.788	2.98	- 5.98	3 190 465
- 5	5.045	2.51	- 5.82	2 371 302
0	3.781	2.06	- 5.66	1 776 920
5	2.855	1.62	- 5.50	1 342 065
10	2.173	1.19	- 5.36	1 021 372
15	1.666	0.78	- 5.22	783 037
20	1.286	0.38	- 5.08	604 583
25	1.000	0.00	- 4.95	470 000
30	0.7825	0.37	- 4.82	367 792
35	0.6163	0.74	- 4.70	289 646
40	0.4883	1.09	- 4.59	229 509
45	0.3892	1.44	- 4.47	182 938
50	0.3120	1.77	- 4.36	146 652
55	0.2515	2.10	- 4.26	118 215
60	0.2038	2.43	- 4.15	95 801
65	0.1660	2.74	- 4.06	78 037
70	0.1359	3.05	- 3.96	63 884
75	0.1118	3.35	- 3.87	52 549
80	0.09240	3.64	- 3.78	43 427
85	0.07670	3.93	- 3.69	30 055
90	0.06395	4.21	- 3.61	25 163
95	0.05354	4.48	- 3.53	21 153
100	0.04501	4.75	- 3.45	17 852
105	0.03798	5.01	- 3.37	15 123

**RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES**

T_{OPER} (°C)	R_T/R_{25}	ΔR DUE TO B-TOLERANCE (%)	TC (%/K)	R_T (Ω)
				2381 641 ⁽¹⁾
				6.474
110	0.03218	5.27	- 3.30	12 859
115	0.02736	5.52	- 3.23	10 973
120	0.02335	5.77	- 3.16	9396
125	0.01999	6.01	- 3.09	9325

RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES

T_{OPER} (°C)	R_T/R_{25}	ΔR DUE TO B-TOLERANCE (%)	TC (%/K)	R_T (Ω)
				2381 641 ⁽¹⁾
				6.333
- 40	33.81	5.55	- 6.55	1116
- 35	24.50	5.02	- 6.34	808.6
- 30	17.93	4.52	- 6.15	591.7
- 25	13.25	4.03	- 5.96	437.1
- 20	9.875	3.56	- 5.78	325.9
- 15	7.425	3.10	- 5.61	245.0
- 10	5.630	2.67	- 5.45	185.8
- 5	4.304	2.24	- 5.29	142.0
0	3.315	1.84	- 5.14	109.4
5	2.573	1.44	- 4.99	84.91
10	2.011	1.07	- 4.85	66.37
15	1.583	0.70	- 4.72	52.24
20	1.254	0.34	- 4.59	41.39
25	1.0000	0.00	- 4.46	33.00
30	0.8024	.033	- 4.34	26.47
35	0.6474	0.66	- 4.23	21.37
40	0.5255	0.98	- 4.12	17.34
45	0.4288	1.28	- 4.01	14.15
50	0.3518	1.59	- 3.91	11.61
55	0.2901	1.88	- 3.81	9.572
60	0.2403	2.17	- 3.71	7.931
65	0.2001	2.45	- 3.62	6.603
70	0.1674	2.72	- 3.53	5.522
75	0.1406	2.99	- 3.44	4.639
80	0.1186	3.25	- 3.36	3.913
85	0.1004	3.51	- 3.28	3.315
90	0.08542	3.76	- 3.20	2.819
95	0.07292	4.00	- 3.13	2.406
100	0.06248	4.24	- 3.06	2.062
105	0.05372	4.47	- 2.98	1.773
110	0.04635	4.70	- 2.92	1.530
115	0.04013	4.93	- 2.85	1.324
120	0.03485	5.15	- 2.79	1.150
125	0.03037	5.36	- 2.73	1.002

Note

1. Replace dot in the code numbers by one of the following, depending on required R_{25} - value:
4 for a tolerance of $\pm 2\%$
6 for a tolerance of $\pm 3\%$
3 for a tolerance of $\pm 5\%$
2 for a tolerance of $\pm 10\%$



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.