
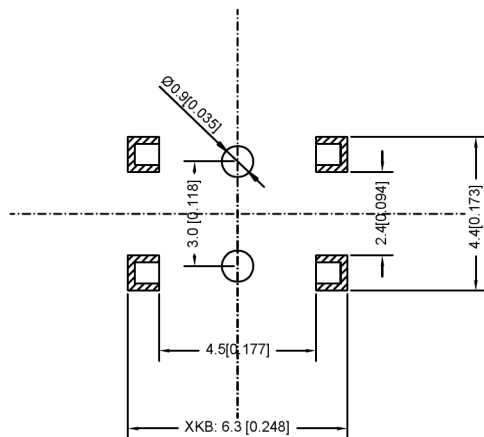

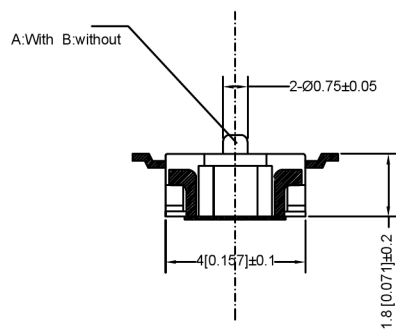
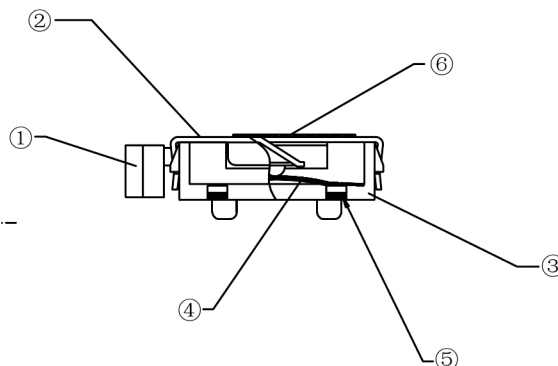


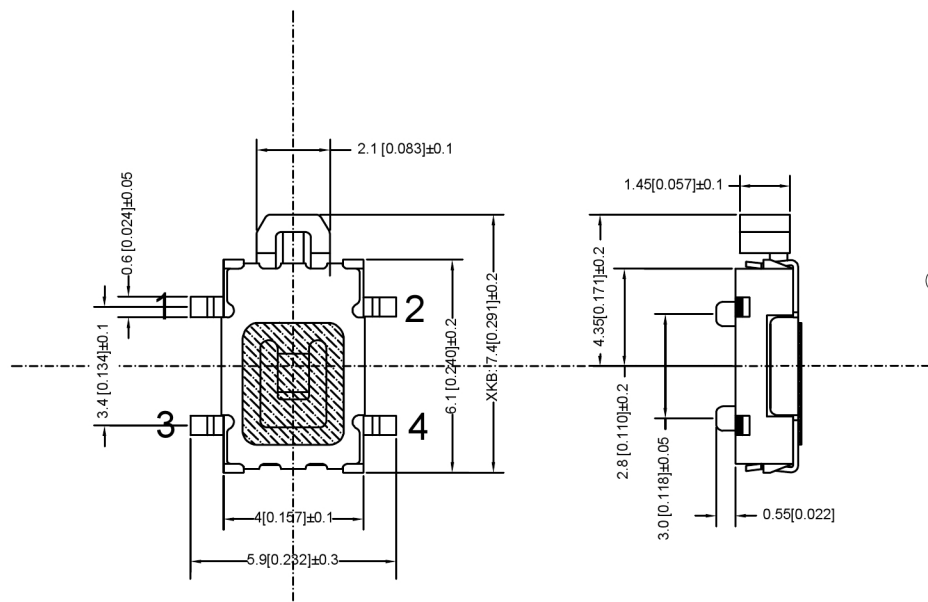

SPECIFICATION

产品规格

Contact Rating	50mA, 12V DC
接触额定值	
Contact Resistance	100MΩ max.
接触电阻	
Insulation Resistance	100MΩ min. 500V DC
绝缘电阻	
Dielectric Strength	250V AC/1 minute
介电强度	
Travel	0.25mm
行进	
Operating Temp.	-25°C~ +70° °C
工作温度	
Storage Temp.	-30C ~ +80° °C
存储温度	
Force Touch	250±100
触控板	

PAPT NO	TS-1183SA-X-X
Operating Force	A:100gf B:160gf C:260gf
Fixed column	A:With B:without

⑥	PI film	—	1	Polyamide	Plating silvering	—
⑤	Terminal	—	4	Brass(0.30t)	ag Plated	—
④	Contact	—	1	F.ag/SUS		—
③	Base	—	1	LCP	Natural	—
②	Cover	—	1	Sus	Tin plated	—
①	Keystake	—	1	LCP		—
TEM	PAPT NAMF	TER,NO		MATERIAL	FINISHING	REMARK

广东星坤科技股份有限公司

ΔX		日期
ΔX		
ΔX		
MARK		

文件工程章

					ANGLAR	±5°
					L ≤ 4	±0.2
					4 < L ≤ 16	±0.3
					16 < L ≤ 63	±0.4
					L > 63	±0.5
					UNSPECIFIED TOLERANCES	
					REVISIONS	
					www.helloxkb.com www.helloxkb.cn www.xk-dg.cn	

DSND		SCALE: N/A	MODEL TYPE: TACT SWITCH
DWN		VIEW:	PART NO.: TS-1183SA-X-X
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	
XKB INDUSTRIAL PRECISION CO.,LIMITED			WEIGHT
			SHEET
			REVISIC
			1/1
			A0