

Pot Cores (5678110821)

Part Number: 5678110821

78 POT CORE SET

Pot cores have found application in all types of inductive devices. The core configuration provides a high degree of self-shielding. It also facilitates gapping to enhance utility for a variety of magnetic designs.

Pot cores can be supplied with the center post gapped to a mechanical dimension or an A_L value.

[Catalog Drawing](#)
[3D Model](#)

Weight indicated is per pair or set.

Weight: 1.9.000 (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	11.1	±0.20	0.437	—
B	3.3	±0.10	0.13	—
C	6.8	±0.25	0.268	—
D	2.3	±0.15	0.091	—
E	9.2	±0.20	0.362	—
F	4.6	±0.10	0.181	—
G	2.2	±0.30	0.087	—

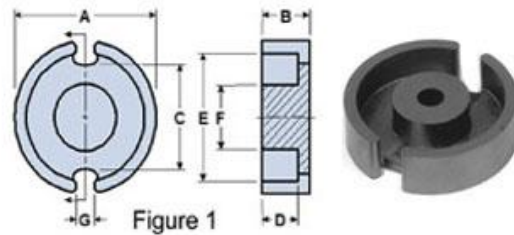



Chart Legend

$\Sigma l / A$: Core Constant, l_e : Effective Path Length, A_e : Effective Cross- Sectional Area, V_e : Effective Core Volume

A_L : Inductance Factor 

Explanation of Part Numbers: Digits 1 & 2 = product class and 3 & 4 = material grade.

Electrical Properties	
A_L (nH)	1680 ±25%
A_e (cm ²)	0.173
$\Sigma l / A$ (cm ⁻¹)	9.5
l_e (cm)	1.65
V_e (cm ³)	0.284
A_{min} (cm ²)	0.145

A_L value is measured at 1 kHz, $B < 10$ gauss.