


High Voltage Thyristor \ Diode Module

V_{RRM} = 2x2000 V
 I_{TAV} = 165 A
 V_T = 1.08 V

Phase leg


Part number

MCD161-20io1

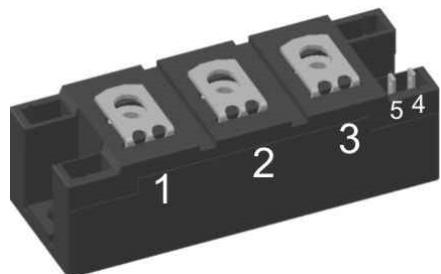

Backside: isolated

 E72873



Features / Advantages:

- Thyristor for line frequency
- Planar passivated chip
- Long-term stability
- Direct Copper Bonded Al₂O₃-ceramic

Applications:

- Line rectifying 50/60 Hz
- Softstart AC motor control
- DC Motor control
- Power converter
- AC power control
- Lighting and temperature control

Package: Y4

- Isolation Voltage: 3600 V~
- Industry standard outline
- RoHS compliant
- Soldering pins for PCB mounting
- Base plate: DCB ceramic
- Reduced weight
- Advanced power cycling

Disclaimer Notice


Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.

Rectifier

Symbol	Definition	Conditions	Ratings			
			min.	typ.	max.	
$V_{RSM/DSM}$	max. non-repetitive reverse/forward blocking voltage	$T_{VJ} = 25^\circ C$			2100	V
$V_{RRM/DRM}$	max. repetitive reverse/forward blocking voltage	$T_{VJ} = 25^\circ C$			2000	V
$I_{R/D}$	reverse current, drain current	$V_{R/D} = 2000 \text{ V}$ $V_{R/D} = 2000 \text{ V}$	$T_{VJ} = 25^\circ C$ $T_{VJ} = 125^\circ C$		400 40	μA mA
V_T	forward voltage drop	$I_T = 150 \text{ A}$	$T_{VJ} = 25^\circ C$		1.14	V
		$I_T = 300 \text{ A}$			1.36	V
		$I_T = 150 \text{ A}$ $I_T = 300 \text{ A}$	$T_{VJ} = 125^\circ C$		1.08 1.36	V
I_{TAV}	average forward current	$T_C = 85^\circ C$	$T_{VJ} = 125^\circ C$		165	A
$I_{T(RMS)}$	RMS forward current	180° sine			300	A
V_{T0}	threshold voltage	r_T slope resistance } for power loss calculation only	$T_{VJ} = 125^\circ C$		0.80	V
	slope resistance				1.6	$m\Omega$
R_{thJC}	thermal resistance junction to case				0.155	K/W
R_{thCH}	thermal resistance case to heatsink			0.07		K/W
P_{tot}	total power dissipation		$T_C = 25^\circ C$		645	W
I_{TSM}	max. forward surge current	$t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$	$T_{VJ} = 45^\circ C$		6.00	kA
		$t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$	$V_R = 0 \text{ V}$		6.48	kA
		$t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$	$T_{VJ} = 125^\circ C$		5.10	kA
		$t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$	$V_R = 0 \text{ V}$		5.51	kA
I^2t	value for fusing	$t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$	$T_{VJ} = 45^\circ C$		180.0	kA^2s
		$t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$	$V_R = 0 \text{ V}$		174.7	kA^2s
		$t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$	$T_{VJ} = 125^\circ C$		130.1	kA^2s
		$t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$	$V_R = 0 \text{ V}$		126.3	kA^2s
C_J	junction capacitance	$V_R = 700 \text{ V}$ $f = 1 \text{ MHz}$	$T_{VJ} = 25^\circ C$	195		pF
P_{GM}	max. gate power dissipation	$t_p = 30 \mu s$	$T_C = 125^\circ C$		120	W
		$t_p = 500 \mu s$			60	W
P_{GAV}	average gate power dissipation				8	W
$(di/dt)_{cr}$	critical rate of rise of current	$T_{VJ} = 125^\circ C; f = 50 \text{ Hz}$ repetitive, $I_T = 500 \text{ A}$			150	$A/\mu s$
		$t_p = 200 \mu s; di_G/dt = 0.5 \text{ A}/\mu s;$				
		$I_G = 0.5 \text{ A}; V = \frac{2}{3} V_{DRM}$ non-repet., $I_T = 160 \text{ A}$			500	$A/\mu s$
$(dv/dt)_{cr}$	critical rate of rise of voltage	$V = \frac{2}{3} V_{DRM}$	$T_{VJ} = 125^\circ C$		1000	$V/\mu s$
		$R_{GK} = \infty$; method 1 (linear voltage rise)				
V_{GT}	gate trigger voltage	$V_D = 6 \text{ V}$	$T_{VJ} = 25^\circ C$		2	V
			$T_{VJ} = -40^\circ C$		2.6	V
I_{GT}	gate trigger current	$V_D = 6 \text{ V}$	$T_{VJ} = 25^\circ C$		150	mA
			$T_{VJ} = -40^\circ C$		200	mA
V_{GD}	gate non-trigger voltage	$V_D = \frac{2}{3} V_{DRM}$	$T_{VJ} = 125^\circ C$		0.25	V
I_{GD}	gate non-trigger current				10	mA
I_L	latching current	$t_p = 30 \mu s$ $I_G = 0.45 \text{ A}; di_G/dt = 0.45 \text{ A}/\mu s$	$T_{VJ} = 25^\circ C$		200	mA
I_H	holding current	$V_D = 6 \text{ V}$ $R_{GK} = \infty$	$T_{VJ} = 25^\circ C$		200	mA
t_{gd}	gate controlled delay time	$V_D = \frac{1}{2} V_{DRM}$ $I_G = 0.5 \text{ A}; di_G/dt = 0.5 \text{ A}/\mu s$	$T_{VJ} = 25^\circ C$		2	μs
t_q	turn-off time	$V_R = 100 \text{ V}; I_T = 160 \text{ A}; V = \frac{2}{3} V_{DRM}$ $T_{VJ} = 100^\circ C$ $di/dt = 10 \text{ A}/\mu s$ $dv/dt = 20 \text{ V}/\mu s$ $t_p = 200 \mu s$		150		μs

Package Y4

Conditions			min.	typ.	max.	Unit
I_{RMS}	<i>RMS current</i>	per terminal			300	A
T_{VJ}	<i>virtual junction temperature</i>		-40		125	°C
T_{op}	<i>operation temperature</i>		-40		100	°C
T_{stg}	<i>storage temperature</i>		-40		125	°C
Weight				150		g
M_D	<i>mounting torque</i>		2.25		2.75	Nm
M_T	<i>terminal torque</i>		4.5		5.5	Nm
$d_{Spp/App}$	<i>creepage distance on surface / striking distance through air</i>		<i>terminal to terminal</i>	14.0	10.0	mm
$d_{Spb/Apb}$			<i>terminal to backside</i>	16.0	16.0	mm
V_{ISOL}	<i>isolation voltage</i>	$t = 1 \text{ second}$ $t = 1 \text{ minute}$	50/60 Hz, RMS; $I_{ISOL} \leq 1 \text{ mA}$		3600 3000	V V

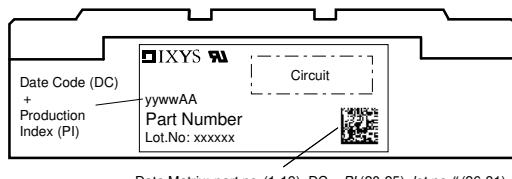


Data Matrix: part no. (1-19), DC + PI (20-25), lot.no.# (26-31), blank (32), serial no.#(33-36)

Ordering	Ordering Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	MCD161-20io1	MCD161-20io1	Box	6	476293

Equivalent Circuits for Simulation

* on die level

$T_{VJ} = 125^\circ\text{C}$

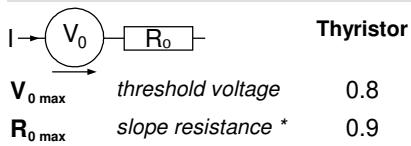


$V_{0\max}$ threshold voltage 0.8

$R_{0\max}$ slope resistance * 0.9





V

mΩ

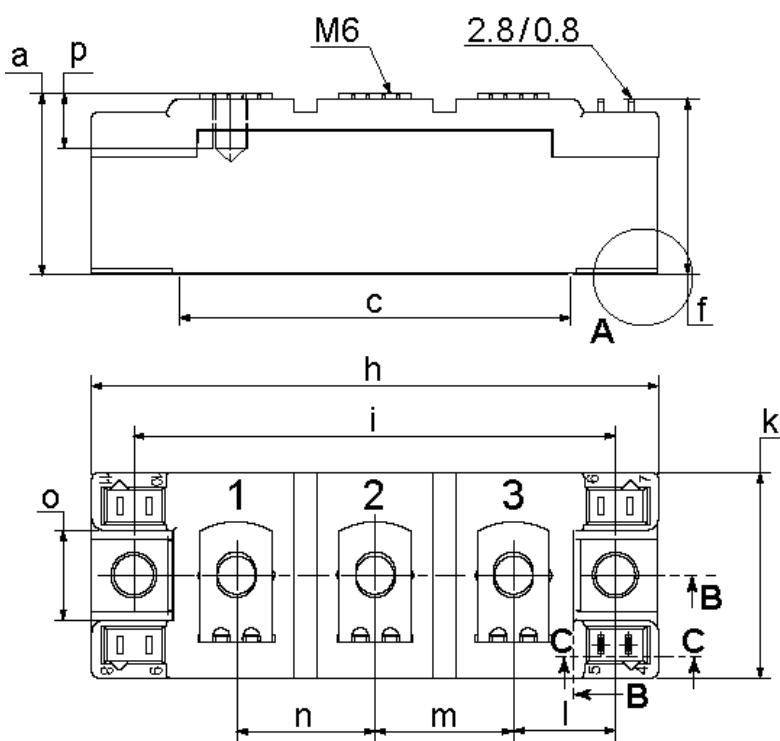Outlines Y4


Dim.	MIN [mm]	MAX [mm]	MIN [inch]	MAX [inch]
a	30.0	30.6	1.181	1.205
b	typ. 0.25		typ. 0.010	
c	64.0	65.0	2.520	2.559
d	6.5	7.0	0.256	0.275
e	4.9	5.1	0.193	0.201
f	28.6	29.2	1.126	1.150
g	7.3	7.7	0.287	0.303
h	93.5	94.5	3.681	3.720
i	79.5	80.5	3.130	3.169
j	4.8	5.2	0.189	0.205
k	33.4	34.0	1.315	1.339
l	16.7	17.3	0.657	0.681
m	22.7	23.3	0.894	0.917
n	22.7	23.3	0.894	0.917
o	14.0	15.0	0.551	0.591
p	typ. 10.5		typ. 0.413	
r	1.8	2.4	0.071	0.041

Optional accessories for modules

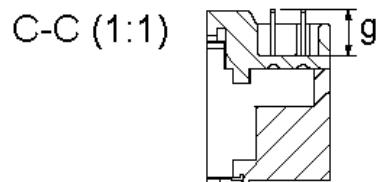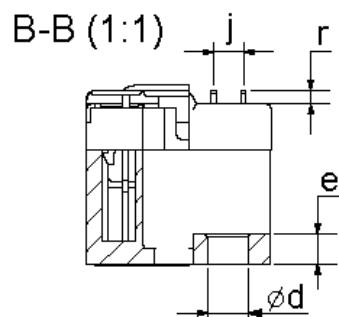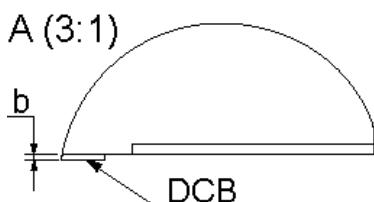Keyed gate/cathode twin plugs with wire length = 350 mm, gate = white, cathode = red
Type ZY 180L (L = Left for pin pair 4/5) UL758, style 3751


Thyristor

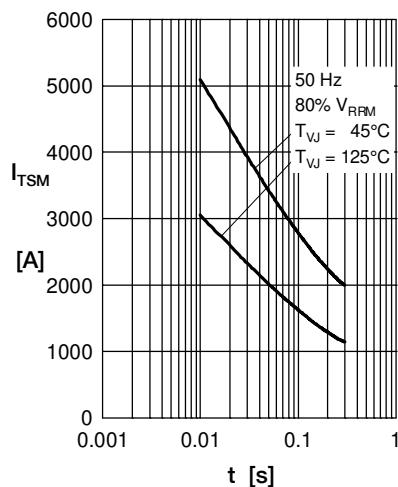


Fig. 1 Surge overload current I_{TSM} ,
 I_{FSM} : Crest value, t : duration

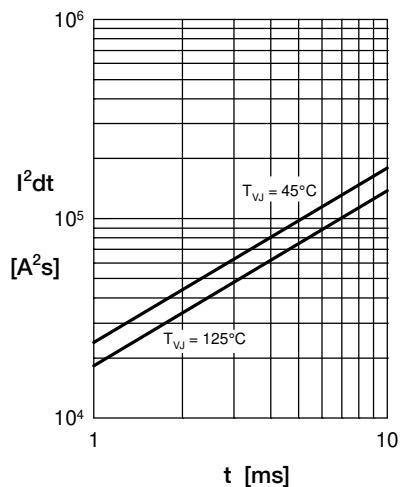


Fig. 2 I^2t versus time (1-10 ms)

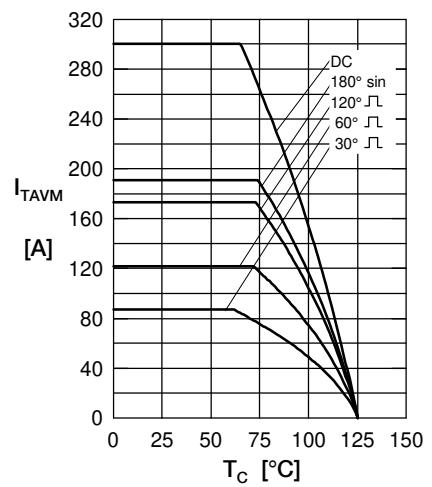


Fig. 3 Max. forward current
at case temperature

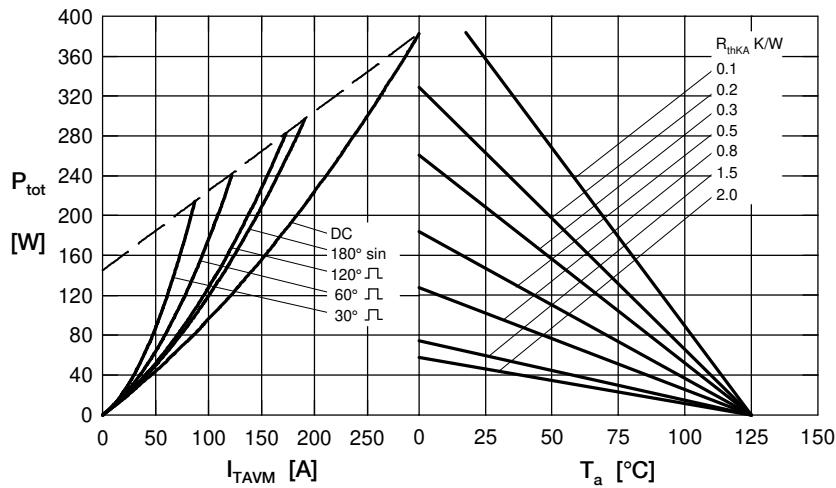


Fig. 4 Power dissipation vs. on-state current & ambient temperature
(per thyristor or diode)

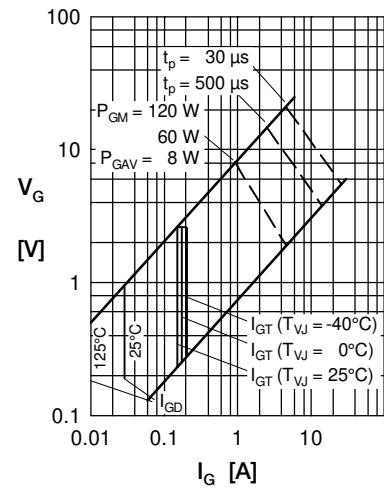


Fig. 5 Gate trigger characteristics

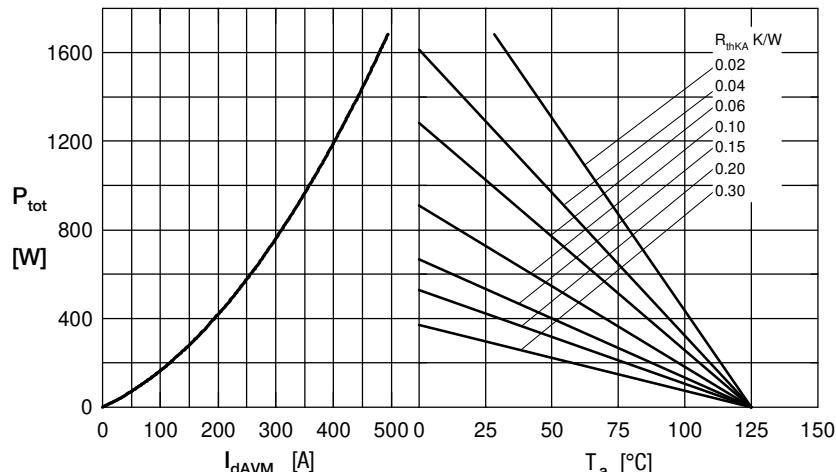


Fig. 6 Three phase rectifier bridge: Power dissipation versus direct output current and ambient temperature

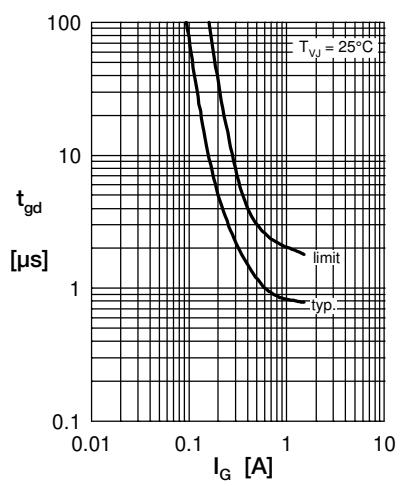


Fig. 7 Gate trigger delay time

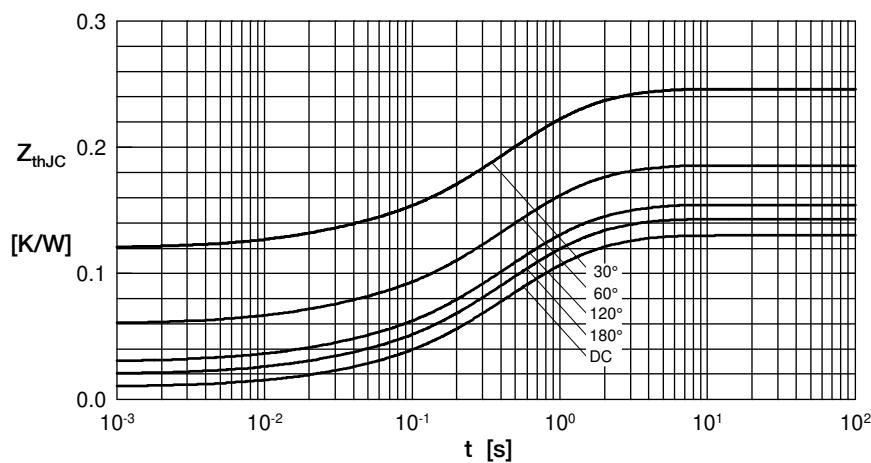
Rectifier


Fig. 8 Transient thermal impedance junction to case at various conduction angles

R_{thJC} for various conduction angles d :

d	R_{thJC} [K/W]
DC	0.155
180°	0.171
120°	0.184
60°	0.222
30°	0.294

Constants for Z_{thJC} calculation:

i	R_{thi} [K/W]	t_i [s]
1	0.012	0.00014
2	0.008	0.019
3	0.030	0.180
4	0.073	0.520
5	0.032	1.600