# P295 Series Metallized Impregnated Paper, Class Y1, 500 VAC



#### **Overview**

The P295 Series is constructed of multilayer metallized paper encapsulated and impregnated in self-extinguishing material meeting the requirements of UL 94 V–0.

### **Applications**

Typical applications include safety capacitors for bridging of double or reinforced insulation applications requiring voltage test up to 4,000 VAC at 60 seconds. P295 Series capacitors can be left in place during this test.

### **Benefits**

· Approvals: ENEC, UL, cUL

Rated voltage: 500 VAC 50/60 Hz
Capacitance range: 470 – 4,700 pF

• Lead spacing: 15.0 mm

• Capacitance tolerance: ±20%

Climatic category: 40/115/56/B, IEC 60068–1

• Tape and reel packaging in accordance with IEC 60286-2

· RoHS Compliant and lead-free terminations

Operating temperature range of -40°C to +115°C

• 100% screening factory test at 4,000 VAC, 50 Hz, 2 seconds

Highest possible safety regarding active and passive flammability

 Excellent self-healing properties ensure long life even when subjected to frequent over voltages

Good resistance to ionization due to impregnated dielectric

High dV/dt capability

 Impregnated paper provides excellent stability and reliability properties, particularly in applications with continuous operation



### **Part Number System**


Р	295	В	Е	471	M	500	Α
Capacitor Class	Series	Lead Spacing (mm)	Size Code	Capacitance Code (pF)	Capacitance Tolerance	Rated Voltage (VAC)	Lead and Packaging Code
P = Paper	Y1, Metallized Paper	B = 15.0	See Dimension Table	First two digits indicate the two most significant digits of the capacitance value in picofarads. The third digit is the number of following zeros.	M = ±20%	500 = 500	See Ordering Options Table



### **Ordering Options Table**

Lead Spacing Nominal (mm)	Type of Leads and Packaging	Lead Length (mm)	KEMET Lead and Packaging Code
	Standard Lead and Packaging Options		
	Bulk – Short Leads	6 +0/-1	С
15	Bulk – Maximum Length Leads	30 +5/-0	А
15	Tape & Reel (Standard Reel)	H <sub>0</sub> = 18.5 +/-0.5	L
	Other Lead and Packaging Options		
	Tape & Reel (Large Reel)	H <sub>0</sub> = 18.5 +/-0.5	Р

### **Dimensions - Millimeters**




Size Code		p	I	В	ı	Н	ı	L		d
	Nominal	Tolerance	Nominal	Tolerance	Nominal	Tolerance	Nominal	Tolerance	Nominal	Tolerance
BE	15	+/-0.4	5.5	Maximum	12.5	Maximum	18	Maximum	0.8	+/-0.05
BJ	15	+/-0.4	6.5	Maximum	12.5	Maximum	18	Maximum	0.8	+/-0.05
BL	15	+/-0.4	7.5	Maximum	14.5	Maximum	18	Maximum	0.8	+/-0.05
BQ	15	+/-0.4	8.5	Maximum	16	Maximum	18	Maximum	0.8	+/-0.05
	Note: See Ordering Options Table for lead length (LL) options.									



### **Performance Characteristics**

Rated Voltage	500 VAC 50/60 Hz			
Capacitance Range	0.00047 – 0.0047 µF			
Capacitance Tolerance	±20%			
Temperature Range	-40°C to +115°C			
Climatic Category	40/115/56/B			
Approvals	ENEC, UL, cUL			
Dissipation Foster	Maximum Values at +23°C			
Dissipation Factor	1 kHz	1.3%		
Test Voltage Between Terminals	The 100% screening factory test is 2 seconds. The voltage level is sele in applicable equipment standards. checked after the test.	ected to meet the requirements		
	Measured at 500 VDC a	after 60 seconds, +23°C		
Insulation Resistance	Minimum Value B	etween Terminals		
	≥ 12,000 MΩ			
In DC Applications	Recommended voltage ≤ 1,500 VDC			
Resonance Frequency	Tabulated self-resonance frequenci	es f <sub>0</sub> refer to 5 mm lead length		

### Suppression vs. Frequency, Typical Values

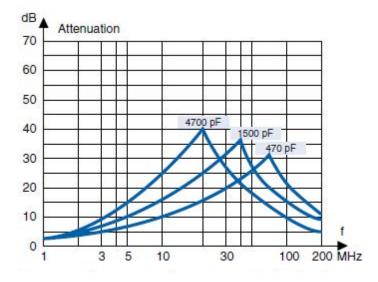



### **Environmental Test Data**

Test	IEC Publication	Procedure
Endurance	IEC 60384-14	$1.7~{\rm x~V_R}$ VAC 50 Hz, once every hour increase to 1,000 VAC for 0.1 second, 1,000 hours at upper rated temperature
Vibration	IEC 60068-2-6 Test Fc	3 directions at 2 hours each 10–500 Hz at 0.75 mm or 98m/s <sup>2</sup>
Bump	IEC 60068-2-29 Test Eb	4,000 bumps at 390 m/s <sup>2</sup>
Change of Temperature	IEC 60068-2-14 Test Na	Upper and lower rated temperature 5 cycles
Passive Flammability	IEC 60384-14	IEC 60384-1, IEC 60695-11-5 Needle flame test
Damp Heat Steady State	IEC 60068-2-78 Test Cab	+40°C and 93% RH, 56 days

### **Approvals**

<b>Certification Body</b>	Mark	Specification	File Number
Intertek Semko AB		EN/IEC 60384-14	SE/0140-34
UL	c <b>FL</b> us	UL 60384-14 CAN/ CSA-E60384-14-09	E73869

### **Environmental Compliance**

All KEMET EMI capacitors are RoHS Compliant.






**Table 1 – Ratings & Part Number Reference** 

Capacitance	Maximum Dimensions in mm			Lead Spacing	f	dV/dt	KEMET Part Number
Value (µF)	В	Н	L	(p)	(MHz)	(V/µs)	KEMIET PAIT NUMBER
0.00047	5.5	12.5	18	15	64	2000	P295BE471M500(1)
0.00056	5.5	12.5	18	15	59	2000	P295BE561M500(1)
0.00068	5.5	12.5	18	15	54	2000	P295BE681M500(1)
0.00082	5.5	12.5	18	15	49	2000	P295BE821M500(1)
0.001	5.5	12.5	18	15	46	2000	P295BE102M500(1)
0.0012	6.5	12.5	18	15	43	2000	P295BJ122M500(1)
0.0015	6.5	12.5	18	15	40	2000	P295BJ152M500(1)
0.0018	6.5	12.5	18	15	37	2000	P295BJ182M500(1)
0.0022	6.5	12.5	18	15	33	2000	P295BJ222M500(1)
0.0025	7.5	14.5	18	15	31	2000	P295BL252M500(1)
0.0027	7.5	14.5	18	15	30	2000	P295BL272M500(1)
0.0033	7.5	14.5	18	15	27	2000	P295BL332M500(1)
0.0039	8.5	16	18	15	24	2000	P295BQ392M500(1)
0.0047	8.5	16	18	15	22	2000	P295BQ472M500(1)
Capacitance Value (µF)	B (mm)	H (mm)	L (mm)	Lead Spacing (p)	f <sub>o</sub> (MHz)	dV/dt (V/μs)	KEMET Part Number

<sup>(1)</sup> Insert lead and packaging code. See Ordering Options Table for available options.

### **Soldering Process**

The implementation of the RoHS Directive has required the use of SnAgCu (SAC) or SnCu alloys as primary solder. These alloys require a higher liquidus temperature (217°C – 221°C) as compared to SnPb eutectic alloy (183°C). Due to the higher pre-heat and wave temperatures, the heat stress to components has increased considerably. Polypropylene capacitors are especially sensitive to soldering temperature due to the relatively low melting point of polypropylene material (160°C – 170°C). As a result, wave soldering can be destructive, especially to mechanically small polypropylene capacitors with lead spacings of 5 –10 mm. For more information, please refer to KEMET's Recommended Soldering Profiles or contact a KEMET representative. IEC Publication 61760–1 Edition 2 may also be consulted for general guidelines.

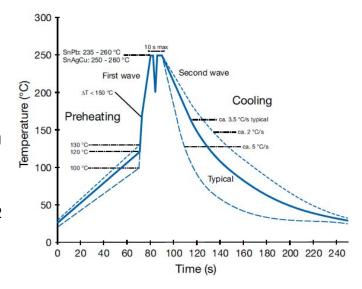



### Marking

- KEMET's logo
- Series
- Capacitance
- Rated voltage
- · Approval marks
- · IEC climatic category
- · Passive flammability class
- · Manufacturing date code

### **Packaging Quantities**


Lead Spacing (mm)	Thickness (mm)	Height (mm)	Length (mm)	Bulk Short Leads	Bulk Long Leads	Standard Reel Ø 360 mm	Large Reel Ø 500 mm	Standard Reel Formed	Ammo Formed
	5.5	10.5	18	1000	800	600	1200	550	570
	5.5	12.5	18	1000	800	600	1200	550	570
	7.5	14.5	18	800	400	400	800	350	378
	6.5	12.5	18	1000	600	500	1000	450	480
15	8.5	16	18	600	400	400	800	350	324
13	8	15	18	600	400	400	800	350	351
	9.5	17.5	18	500	300	350	700	250	297
	6	12	18	1000	800	500	1000	450	520
	11	19	18	450	250	300	600	250	252
	13	12.5	18	400	300	250	500	200	216




### Lead Taping & Packaging (IEC 60286-2)

### Lead Spacing 10.2 - 15.2 mm

### Lead Spacing 20.3 - 22.5 mm

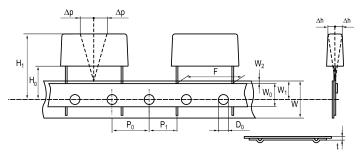

### Formed Leads from 10.2 to 7.5 mm

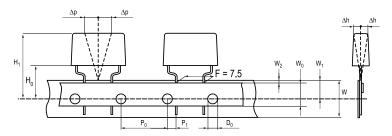

### **Taping Specification**

	Standard IEC 60286-2							
Lead spacing	+6/-0.1	F	Formed 7.5	10.2	15.2	20.3	22.5	F
Carrier tape width	+/-0.5	W	18	18	18	18	18	18+1/-0.5
Hold-down tape width	+/-0.3	$W_{0}$	9	12	12	12	12	
Position of sprocket hole	+/-0.5	W <sub>1</sub>	9	9	9	9	9	g+0.75/-0.5
Distance between tapes	Maximum	W <sub>2</sub>	3	3	3	3	3	3
Sprocket hole diameter	+/-0.2	D <sub>0</sub>	4	4	4	4	4	4
Feed hole lead spacing	+/-0.3	P <sub>0</sub> <sup>(1)</sup>	12.7(4)	12.7	12.7	12.7	12.7	12.7
Distance lead – feed hole	+/-0.7	P <sub>1</sub>	3.75	7.6	5.1	8.9	5.3	P <sup>1</sup>
Deviation tape – plane	Maximum	Δp	1.3	1.3	1.3	1.3	1.3	1.3
Lateral deviation	Maximum	Δh	2	2	2	2	2	2
Total thickness	+/-0.2	t	0.7	0.7	0.7	0.7	0.9 <sup>MAX</sup>	0.9 <sup>MAX</sup>
Sprocket hole/cap body	Nominal	H <sub>0</sub> <sup>(2)</sup>	18+2/-0	18+2/-0	18+2/-0	18+2/-0	18.5+/-0.5	18+2/-0
Sprocket hole/top of cap body	Maximum	H <sub>1</sub> <sup>(3)</sup>	35	35	35	35	58	58 <sup>MAX</sup>

<sup>(1)</sup> Maximum cumulative feed hole error, 1 mm per 20 parts.

<sup>(2) 16.5</sup> mm available on request.

<sup>(3)</sup> Depending on case size.

<sup>(4) 15</sup> mm available on request.




### Lead Taping & Packaging (IEC 60286-2) cont'd


### **Ammo Specifications**


Carias	Dimensions (mm)				
Series	Н	W	Т		
P295	330	330	50		

### **Reel Specifications**

Series	Dimensions (mm)				
	D	Н	W		
P295	360 500	30	46 (Max)		







## **Manufacturing Date Code (IEC-60062)**

Y = Year, Z = Month								
Year	Code	Month	Code					
2000	M	January	1					
2001	N	February	2					
2002	Р	March	3					
2003	R	April	4					
2004	S	May	5					
2005	T	June	6					
2006	U	July	7					
2007	V	August	8					
2008	W	September	9					
2009	X	October	0					
2010	Α	November	N					
2011	В	December	D					
2012	С							
2013	D							
2014	E							
2015	F							
2016	Н							
2017	J							
2018	K							
2019	L							
2020	M							



## **KEMET Corporation World Headquarters**

2835 KEMET Way Simpsonville, SC 29681

Mailing Address: P.O. Box 5928 Greenville, SC 29606

www.kemet.com Tel: 864-963-6300 Fax: 864-963-6521

### **Corporate Offices**

Fort Lauderdale, FL Tel: 954-766-2800

### **North America**

#### Southeast

Lake Mary, FL Tel: 407-855-8886

#### **Northeast**

Wilmington, MA Tel: 978-658-1663

#### Central

Novi, MI

Tel: 248-306-9353

#### West

Milpitas, CA Tel: 408-433-9950

#### Mexico

Guadalajara, Jalisco Tel: 52-33-3123-2141

### **Europe**

#### **Southern Europe**

Paris, France Tel: 33-1-4646-1006

Sasso Marconi, Italy Tel: 39-051-939111

#### **Central Europe**

Landsberg, Germany Tel: 49-8191-3350800

Kamen, Germany Tel: 49-2307-438110

#### **Northern Europe**

Bishop's Stortford, United Kingdom Tel: 44-1279-460122

Espoo, Finland

Tel: 358-9-5406-5000

### **Asia**

#### **Northeast Asia**

Hong Kong

Tel: 852-2305-1168

Shenzhen, China Tel: 86-755-2518-1306

Beijing, China

Tel: 86-10-5829-1711

Shanghai, China Tel: 86-21-6447-0707

Taipei, Taiwan Tel: 886-2-27528585

#### **Southeast Asia**

Singapore

Tel: 65-6586-1900

Penang, Malaysia Tel: 60-4-6430200

Bangalore, India Tel: 91-806-53-76817

Note: KEMET reserves the right to modify minor details of internal and external construction at any time in the interest of product improvement. KEMET does not assume any responsibility for infringement that might result from the use of KEMET Capacitors in potential circuit designs. KEMET is a registered trademark of KEMET Electronics Corporation.



#### **Disclaimer**

All product specifications, statements, information and data (collectively, the "Information") in this datasheet are subject to change. The customer is responsible for checking and verifying the extent to which the Information contained in this publication is applicable to an order at the time the order is placed.

All Information given herein is believed to be accurate and reliable, but it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Statements of suitability for certain applications are based on KEMET Electronics Corporation's ("KEMET") knowledge of typical operating conditions for such applications, but are not intended to constitute – and KEMET specifically disclaims – any warranty concerning suitability for a specific customer application or use. The Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by KEMET with reference to the use of KEMET's products is given gratis, and KEMET assumes no obligation or liability for the advice given or results obtained.

Although KEMET designs and manufactures its products to the most stringent quality and safety standards, given the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage.

Although all product-related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicted or that other measures may not be required.