

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:


50034-8000

Status:

Active

Description:

2.00mm Pitch Board-In Crimp Terminal 50034, Reel

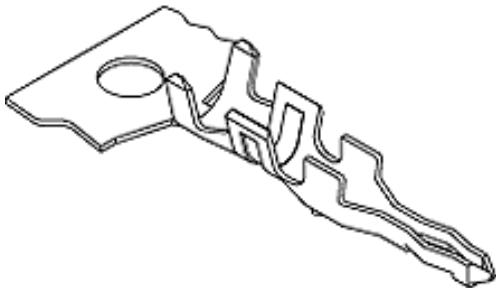

Series

image - Reference only

Documents:

- 3D Model

Product Specification PS-51015-002 (PDF)
- Drawing (PDF)

RoHS Certificate of Compliance (PDF)
- Product Specification PS-51015-001 (PDF)

General

Product Family	Crimp Terminals
Series	50034
Application	Signal
Crimp Quality Equipment	Yes
Packaging Alternative	50034-8100 (Loose)
Product Name	Board-In
UPC	800753576261

Physical

Gender	Male
Material - Metal	Phosphor Bronze
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Net Weight	40.000/mg
Packaging Type	Reel
Plating min - Mating	0.889µm
Plating min - Termination	0.914µm
Termination Interface: Style	Crimp or Compression
Wire Insulation Diameter	1.40mm max.
Wire Size AWG	26, 28, 30
Wire Size mm²	N/A

Electrical

Current - Maximum per Contact	1.5A, 1A, 2A
Voltage - Maximum	125V

Material Info

Reference - Drawing Numbers

Product Specification	PS-51015-001, PS-51015-002, RPS-51015-001, RPS-51015-003, RPS-51015-004, RPS-51015-005, RPS-51015-006
Sales Drawing	SD-50034-002

EU RoHS

ELV and RoHS
Compliant
REACH SVHC
Contains SVHC: No
Low-Halogen Status
Low-Halogen

China RoHS



Need more information on product
environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series

50034Series

Use With

51015

Application Tooling | FAQ

Tooling specifications and manuals are
found by selecting the products below.
Crimp Height Specifications are then
contained in the Application Tooling
Specification document.

Global

Description	Product #
T2 Terminator	0639104000
Tooling Die	
Hand Crimp Tool for 2.00mm Pitch Board-In Crimp Terminals	0638234900
FineAdjust™ Applicator for 2.00mm Pitch Wire-to-Wire Terminal, 26-30 AWG Wire	0639004000

Japan

Description	Product #
Applicator for M211A Bench Press, 26-30 AWG Wire	<u>0570553000</u>
Side-Feed Applicator For Full-Auto Machine	<u>0570553200</u>
Extraction Tool	<u>0570576000</u>

This document was generated on 02/11/2013

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION