

May 2020

# PiezoHapt<sup>™</sup> Actuators

For general use



PHUA8060-35A-33-000 PHUA3015-30A-21-000

### **REMINDERS FOR USING THESE PRODUCTS**

Before using these products, be sure to request the delivery specifications.

### **SAFETY REMINDERS**

Please pay sufficient attention to the warnings for safe designing when using this products.

In use of this product, it should be minded by notes and please perform a safety design, after checking the individual standard for every un enough.
Do not apply DC bias to the product. In addition, the insulation resistance may be reduced and the function may not be performed.
Use piezoelectric devices so that moisture-containing substances and water droplets do not come into contact with each other.
<ul> <li>There is a risk of performance degradation, adhere to the following matters.</li> <li>Store the product in a packaged condition to avoid sudden temperature changes, condensation, direct sunlight, corrosive gas, dust, and dus Use within six months.</li> <li>Do not apply strong shocks (fall etc.) or pressure by which a crack goes into a product.</li> <li>Do not supply any voltage higher than applicable to the product.</li> <li>Do not use the piezoelectric buzzer outdoors. It is designed for indoor use.</li> <li>Do not apply the temperature more than 150°C.</li> </ul>
When designing your equipment even for general-purpose applications, you are kindly requested to take into consideration securing protections
tion circuit/device or providing backup circuits in your equipment.
) Do not wash the product in such a way that solvent or gas can penetrate the product.
Handle piezoelectric devices with care so that they do not touch them by hand. It can cause corrosion and the charge being charged may b discharged to the hands.
Discharge the product before connecting it to the measuring instrument.
Do not remove the piezoelectric element from the diaphragm.
) When soldering, be careful not to attach flux or other foreign matter to the piezoelectric device.
) When soldering a terminal pin, perform the soldering in clean conditions without contamination or rust in order to avoid poor connections.
Check the resonant frequency in the mounting condition, and use the product within the range where the resonant frequency is not affected b the resonance with a reference value of 1/2 or less of the resonant frequency.
When fixing the product by adhesion, etc., investigate the type, amount, adhesion, etc. of the adhesive, conduct a reliability evaluation tes and confirm that there are no abnormalities.
Do not use the product on a device that allows consumers to touch the product.
Do not rework the product.
The characteristics may vary depending on the shape and location of the mounting part. Check the mounted condition.
Please take appropriate measures such as acquiring protective circuits and devices that meet the uses, applications, and conditions of th instruments and keeping backup circuits.
We are not liable for any damage caused by the use of equipment (automobiles, aircraft, medical equipment, nuclear power equipment, etc. that requires high safety and reliability, or that may cause damage to human life, body, property, etc., or that may have a significant social impact due to a product failure, malfunction, or failure, as well as the use of the product beyond the scope and conditions of this catalog.
<ul> <li>Do not use it in the following environments</li> <li>Corrosive gases (Cl2, NH3, H2S, SOx, NOx, etc.)</li> <li>Environments with highly conductive substances (electrolytes, water, saltwater, etc.)</li> <li>Environments with acid, alkali, or organic solvents</li> <li>Places to be exposed to dust.</li> </ul>

### **PiezoHapt™ actuators**

For general use

# **Overview of the PHU series**

### FEATURES


- ◯ It is thin and can support various application.
- $\bigcirc$  It is possible to obtain a clear response by low-voltage drive.
- O It answers in an instant and can respond to a variegated vibration pattern (vibrational frequency).

#### APPLICATION


Touchpad, displays, amusement equipment, game controller, wearable devices etc.

#### DRIVE CIRCUIT BLOCK DIAGRAM EXAMPLE

#### Discrete

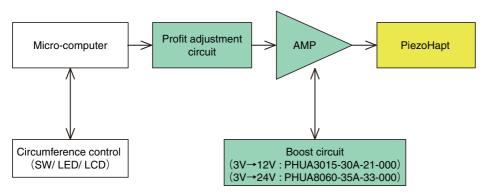


#### □ Haptic driver IC

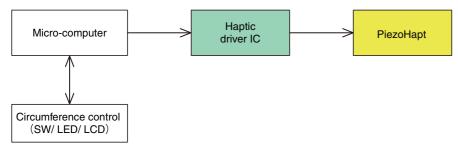

O RoHS Directive Compliant Product: See the following for more details. https://product.tdk.com/info/en/environment/rohs/index.html

Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading.

# **Overview of the PHU series**

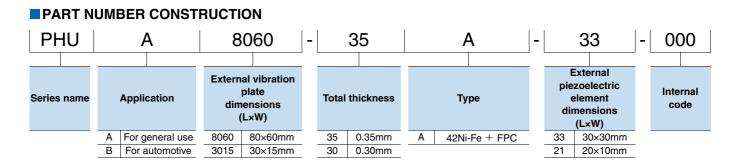

#### PRODUCT LINEUP

SPECIFICATIONS				
Part No.		PHUA8060-35A-33-000	PHUA3015-30A-21-000	
Dimensions	Vibration plate	(mm)	80×60×0.25	30×15×0.1
	Element	(mm)	30×30×0.1	20×10×0.2
Vibration plate specifications		42Ni-Fe	42Ni-Fe	
Electrode specification		FPC	FPC	

#### CHARACTERISTICS

Part No.	PHUA8060-35A-33-000	PHUA3015-30A-21-000
Application	Touchpad Displays	Wearable devices
Operation voltage	24VP-P(±12V)max.	12VP-P(±6V)max.
Operating temperature range	-10 to +60°C	-10 to +60°C

A Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading.


**公TDK** 

# PHUA8060-35A-33-000

#### APPLICATION

○ Suitable for touch panel and display.

#### SHAPE & DIMENSIONS




Dimensions in mm


· Product shape are subject to change without notice.

#### SPECIFICATIONS

Vibration plate specifications		42Ni-Fe
Electrode specification	FPC	
	Width	12mm
	Number of cores	2
	Insulation length	30mm
	Lead pitch	7.0mm
	Stripping length	5.0mm
	Reinforcement	8.0mm
Operation voltage		24VP-P(±12V)max.
Operating temperature range -10 to +60°C		-10 to +60°C

RECOMMENDED WIRING





**⊗TDK** 


A Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading.

### PHUA8060-35A-33-000

#### ■ PACKAGING STYLE/PACKING NUMBER/MINIMUM ORDERING UNIT

	PHUA8060-35A-33-000	
Packaging style	Bulk (Tray)	
Packing number	200 pieces / corrugated cardboard	
	(20 trays containing 10 pieces)	
Minimum ordering unit	200 pieces	
	(1 boxes of corrugated cardboard containing 200 piece)	

#### □Tray

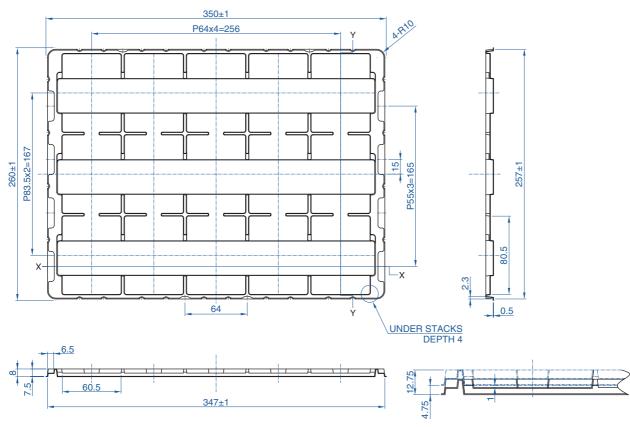

A Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading.


### PiezoHapt<sup>™</sup> Actuators

### PHUA3015-30A-21-000


#### APPLICATION


 $\bigcirc$  Suitable for small equipment such as wearable devices.

#### SHAPE & DIMENSIONS



#### RECOMMENDED WIRING





Dimensions in mm

· Product shape are subject to change without notice.

#### SPECIFICATIONS

Vibration plate specifications		42Ni-Fe
Insulation specific	ations	Without insulation
Electrode specification	FPC	
	Width	12mm
	Number of cores	2
	Insulation length	14.5mm
	Lead pitch	7.0mm
	Stripping length	5.0mm
	Reinforcement	8.0mm
Operation voltage		12VP-P(±6V)max.
Operating temperature range		-10 to +60°C


A Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading.

# PHUA3015-30A-21-000

#### ■ PACKAGING STYLE/PACKING NUMBER/MINIMUM ORDERING UNIT

	PHUA3015-30A-21-000
Packaging style	Bulk (Tray)
Packing number	1200 pieces / corrugated cardboard (20 trays containing 60 pieces)
Minimum ordering unit	1200 pieces (1 boxes of corrugated cardboard containing 1200 piece)

#### □Tray

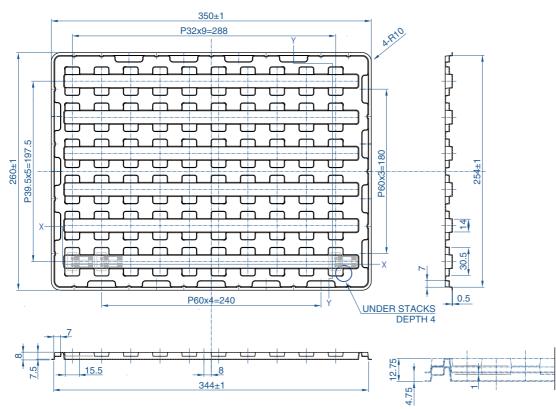

A Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading.