

## ■ Features

- Power Rating: 240W
- Input Voltage: 347-480Vac
- Constant current design
- Output current(3100mA-7500mA)
- Selectable output through POT switch
- Efficiency up to 93%
- Optional dimming function: 0-10V, PWM, Resistor, Timing
- Protections: SCP, OTP, OVP
- IP65
- 5-year warranty
- Surge Protection: L/N-PE/GND: 4KV, L-N 2KV



\*Product images are for illustrative purposes only and may vary from actual design.

## ■ Application

- High bay lights


## ■ Model List\*(See part number scheme for model number details)

Model Number	Input Voltage Range	Output Power	Output Voltage	Output Current Min.	Output Current Max.	Efficiency	Certification
L3HCD240S750ST	347-480Vac	240W	24-38V	4400mA	7500mA	92%	UL/CCC/TUV BIS/SAA/CE
L3HCD240S570ST	347-480Vac	240W	32-58V	3100mA	5700mA	93%	UL/CCC/TUV BIS/SAA/CE

### Notes:

1. Output current selectable by POT switch
2. Torque: 0.98 to 19.6mN·m (10 to 200gf·cm) max.
3. Stop strength: 49.0mN·m (500gf·cm) min

## ■ Wiring Diagram / Dimming

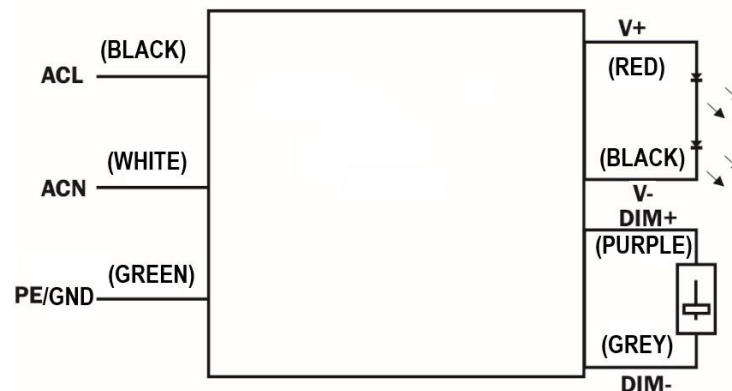

**Technical Sales / Customer Service:** +1-818-338-7788 • Email: [sales@autec.com](mailto:sales@autec.com)


31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • [www.autec.com](http://www.autec.com)

September 18, 2019

## ■ Input Characteristics

Parameter	Min	Typ.	Max	Remarks
Rated AC input range	347Vac		480Vac	
AC input range	180Vac		528Vac	
Input frequency range	47Hz		63Hz	
Max input current			1.8A	180Vac, full load
Inrush current			60A	347Vac/50Hz, cold start
No load power		5W	8W	347Vac/50Hz, No load
Power factor	0.93	0.95		347Vac/50Hz, full load
	0.90			200-480Vac/50Hz, 80-100% Load
THD		8%	10%	347Vac/50Hz, full load
			20%	200-480Vac/50Hz, 70-100% Load

## ■ Mechanical Design

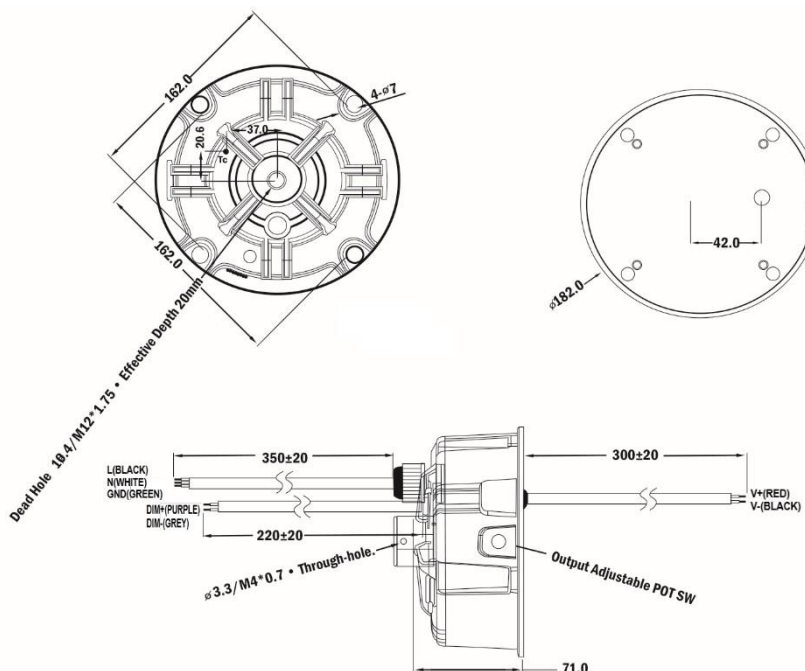

### Wire Specifications

Input Wire	UL STW #18AWG, 3 X 0.824MM <sup>2</sup> , O.D. 9MM, GREEN: PE/GND, BLACK: L, WHITE: N
Output Wire	UL SJTW #14AWG 2X2.08MM <sup>2</sup> , O.D. 9MM, RED: V+, BLACK: V-
Dim Wire	STYLE 2733, #22AWG O.D. 5.0MM, PURPLE: DIM+, GREY: DIM-

**Technical Sales / Customer Service:** +1-818-338-7788 • Email: [sales@autec.com](mailto:sales@autec.com)

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • [www.autec.com](http://www.autec.com)

September 18, 2019

# **■ Safety Compliance**

Certification		Standard	Status	Remark
UL/cUL		UL8750	✓	
CE		EN 61347-2-13:2014 EN61347-1:2008+A1:2011+A2:2013	✓	
Item		Standard	Remark	
Insulation Strength	Input-output	3200Vac/5mA Max/60s	Reinforced insulation	
	Primary-Earth	1600Vac/5mA Max/60s	Basic insulation	
	Sec.- Earth	1000Vac/5mA Max/60s	Function insulation	
Insulation Resistance	Input-output	≥10 MΩ	Testing Voltage: 500Vdc	
Ground Resistor		≤0.1Ω	25A/1min	
Leakage Current		≤0.75mA	480Vac	
Item		Criterion	Remark	
Conduction Emission		EN55015:2013+A1:2015		
Radiation Emission		EN55015:2013+A1:2015		
Harmonic Current Emissions		IEC/EN 61000-3-2	Class C	
Surge		IEC/EN61000-4-5	Difference mode 4KV, Common mode 6KV Criterion B	

## **Disclaimer:**

Autec Power Systems' (Autec) LED Drivers are Hi-Pot tested during the manufacturing process. Autec assumes no responsibility for secondary Hi-Pot testing at customer location or designated production line(s). Should customer require further Hi-Pot testing, at their own production line, following assembly of the LED Driver into the customer's assembled fixture, Autec requests advance notice. This request must be communicated to Autec in a timely manner and is recommended to be requested at time of issuing each purchase order.


**Technical Sales / Customer Service:** +1-818-338-7788 • Email: [sales@autec.com](mailto:sales@autec.com)

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • [www.autec.com](http://www.autec.com)

September 18, 2019

3 / 7

■ Performance Curve

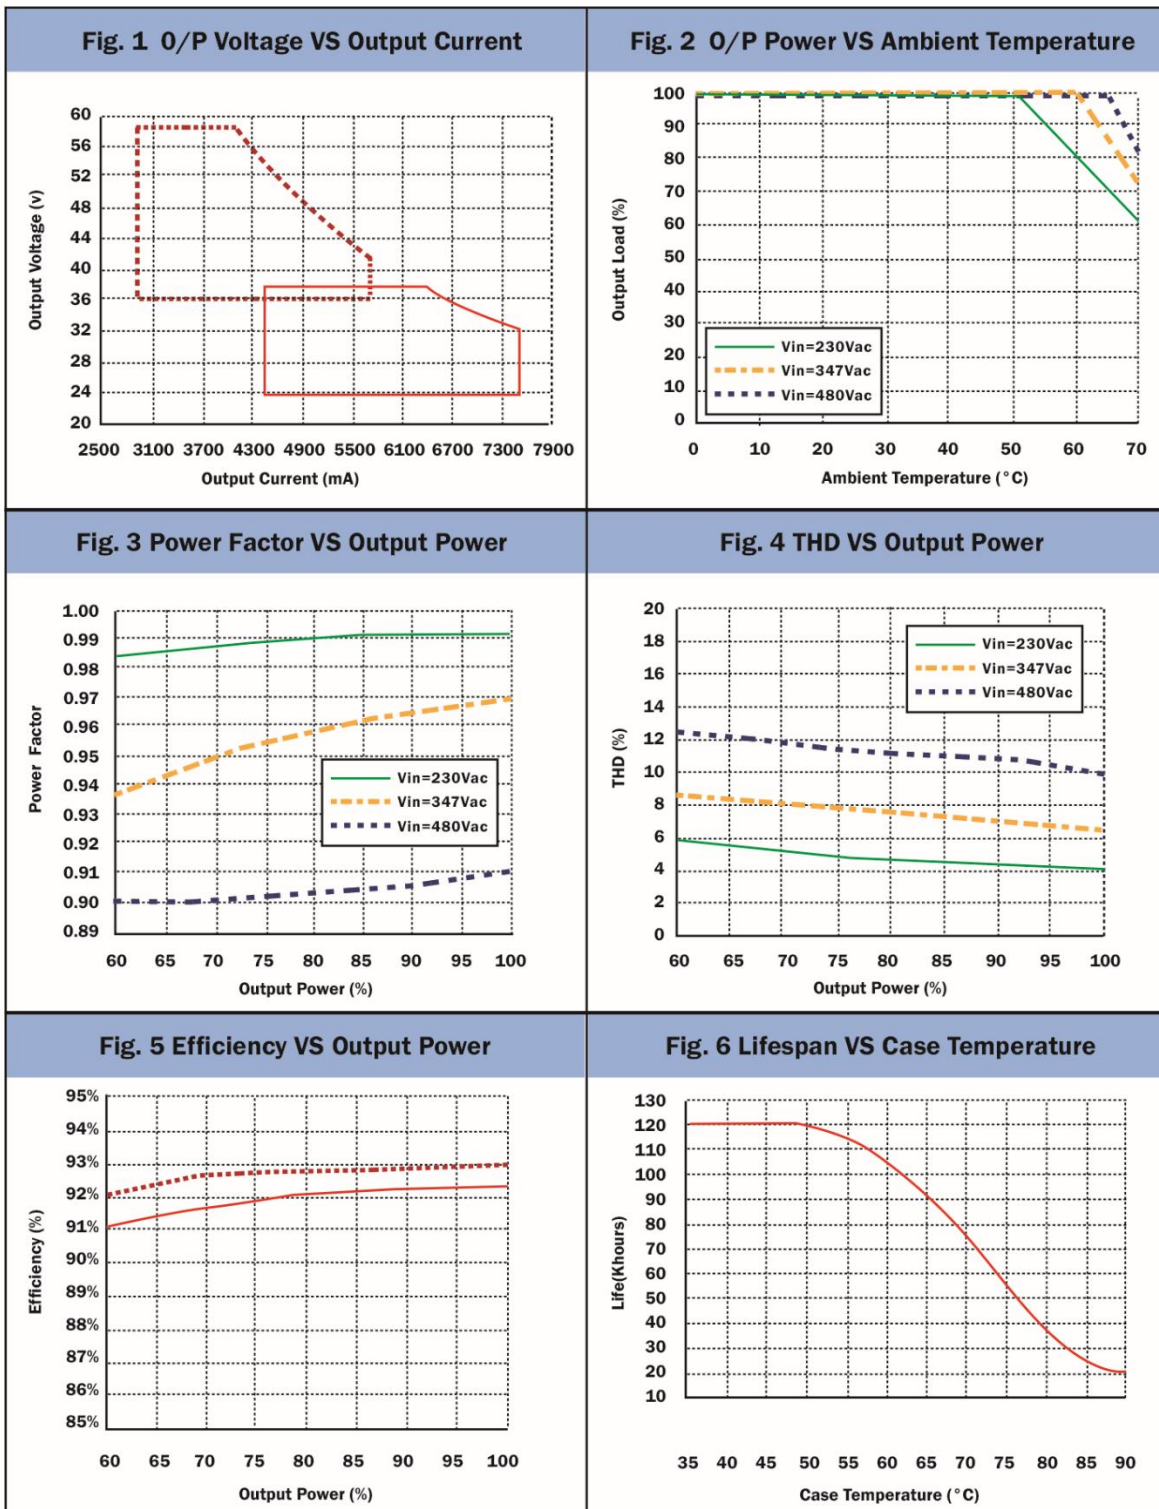

Technical Sales / Customer Service: +1-818-338-7788 • Email: [sales@autec.com](mailto:sales@autec.com)

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • [www.autec.com](http://www.autec.com)

September 18, 2019

4 / 7

Parameter		Min	Typ.	Max	Remarks
0-10V Dimming (optional)	Dim Vmax	-20V		14V	3 in 1 Dimming; 1-5V Dimming optional; Negative Logic Dim Optional
	Dim Range	10% Io max		100% Io set	
	Voltage	1V		10V	
	OFF	0.3V	0.5V	0.7V	Dim-off value
	On	0.5V	0.7V	0.9V	
PWM Dimming (Optional)	High	5V		10V	
	Low	-0.3V		-0.6V	
	Frequency	200Hz		2KHz	
	PWM Duty	1%		99%	
Resistor Dimming (optional)	Resistance	10K Ohm		100K Ohm	
	Dimming	10% Io max		100% Io Set	
Timing Curve (optional)	IC Control	By Programming			Typically, 3-4 sections
	Timing	5H/6H/7H/8H per section			DefaultMode:24 Hour/Circle with 50% load
Protection	OTP	90°C	100 °C	110 °C	Tc, Self-recovery
	Short Circuit Protection	Driver will not damage with CC Limit			Remove abnormal, Self-recovery
Life Time		55,000hrs			347Vac full load, Tc 75°C
MTBF		200,000hrs			347Vac full load, Ta=25°C, (MIL-HDBK-217F)
Temperature Coefficient		-0.03%/°C			+0.03%/°C 0°C~85°C
Tc		85°C			
Warranty		5 years			Tc75°C
Net Weight		1.5kg			
Dimension		φ182mm*71mm			DxH

**Technical Sales / Customer Service:** +1-818-338-7788 • Email: [sales@autec.com](mailto:sales@autec.com)

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • [www.autec.com](http://www.autec.com)

September 18, 2019

5 / 7



## ■ Dimming

### 0-10V Dimming (Typ.)


Voltage Range	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	Open
Rated Current Percentage	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95-108%

PWM Duty	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	Open
Rated Current Percentage	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95-108%

### Resistor(Typ.)

Resistor	10KΩ	20KΩ	30KΩ	40KΩ	50KΩ	60KΩ	70KΩ	80KΩ	90KΩ	100 KΩ	Open
Rated Current Percentage	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95-108%

## ■ Dimming Curve

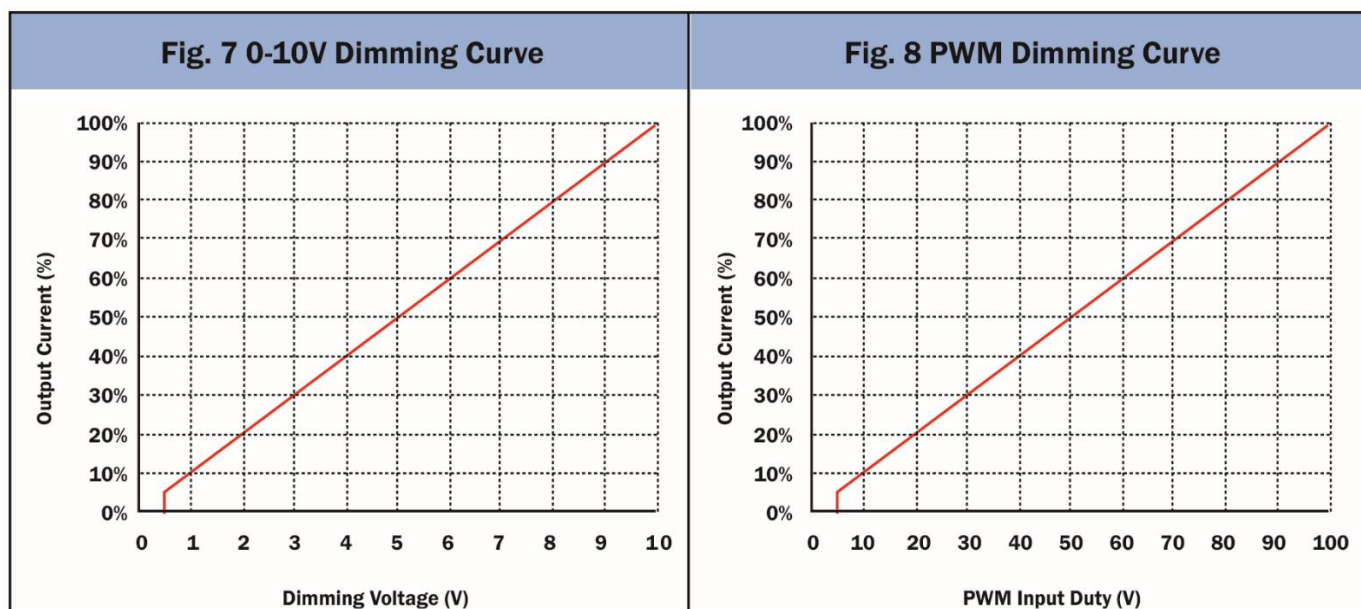


Technical Sales / Customer Service: +1-818-338-7788 • Email: [sales@autec.com](mailto:sales@autec.com)

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • [www.autec.com](http://www.autec.com)

September 18, 2019

6 / 7

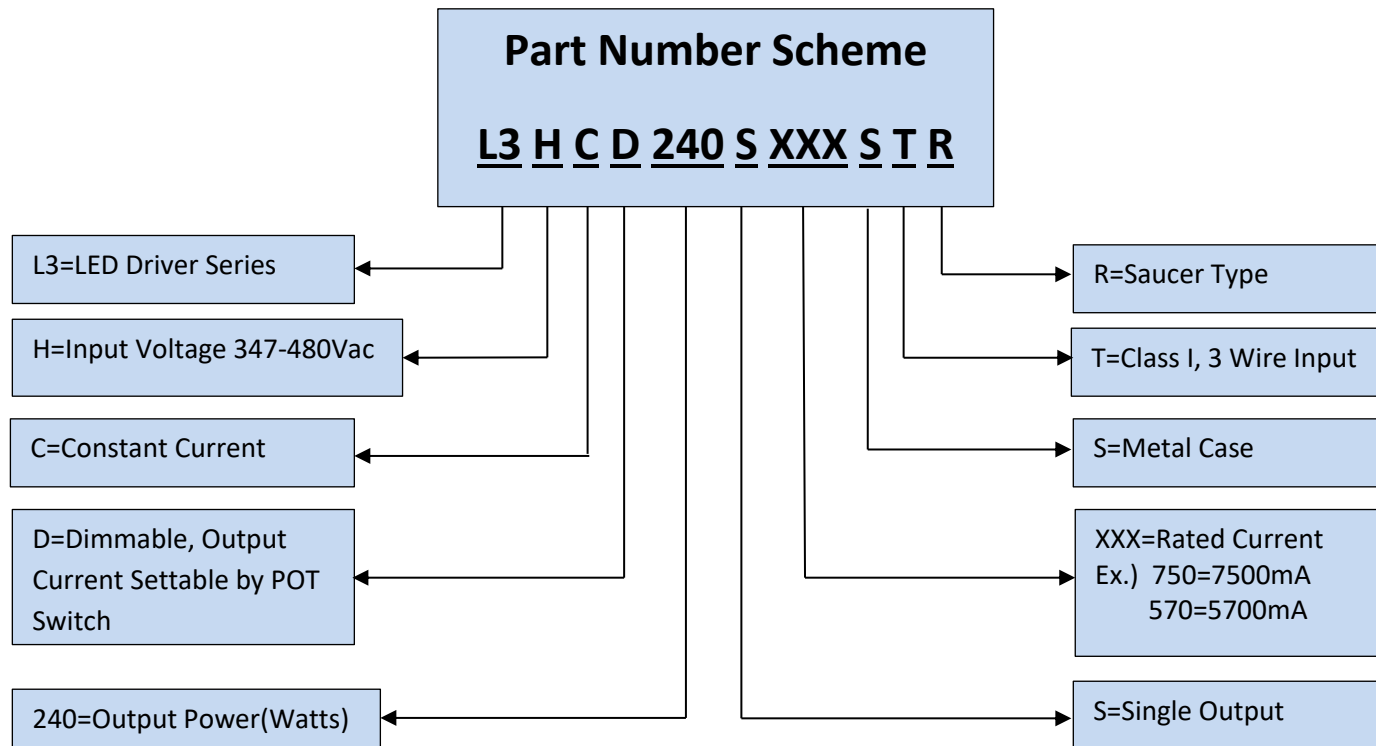

\*Product images are for illustrative purposes only and may vary from actual design.

\*Specifications are subject to change without notice. Autec is not responsible for issues arising from errors or omissions.

Technical Sales / Customer Service: +1-818-338-7788 • Email: [sales@autec.com](mailto:sales@autec.com)

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • [www.autec.com](http://www.autec.com)

September 18, 2019

7 / 7