




Resistance Weld SMD Crystal

C9SD
(former HC49SSDLF)
DATASHEET

Page 1 of 2

- Tolerances down to 10 PPM
- Stabilities down to 5 PPM

• C9SD STANDARD SPECIFICATIONS		
PARAMETERS		MAX (unless otherwise noted)
Frequency Range		4.000 ~ 80.000 MHz
Frequency Tolerance @ 25°C		(See options on page 2)
Frequency Stability, ref @ 25°C Over Operating Temp Range		(See options on page 2)
Temperature Range		
Operating (TOPR)		(See options below)
Storage (TSTG)		-40°C ~ +85°C
Shunt Capacitance (Co)		7pF
Load Capacitance (CL)		(See options on page 2)
Drive Level		0.5 mW
Aging per year		±5 PPM
Maximum Soldering Temp / Time		260°C / 10 Seconds
Moisture Sensitivity Level (MSL)		1
Termination Finish		Sn/3.0Ag/0.5Cu
Seam Method		Resistance Weld
Lead (Pb) Free		Yes
RoHS Complaint		Yes

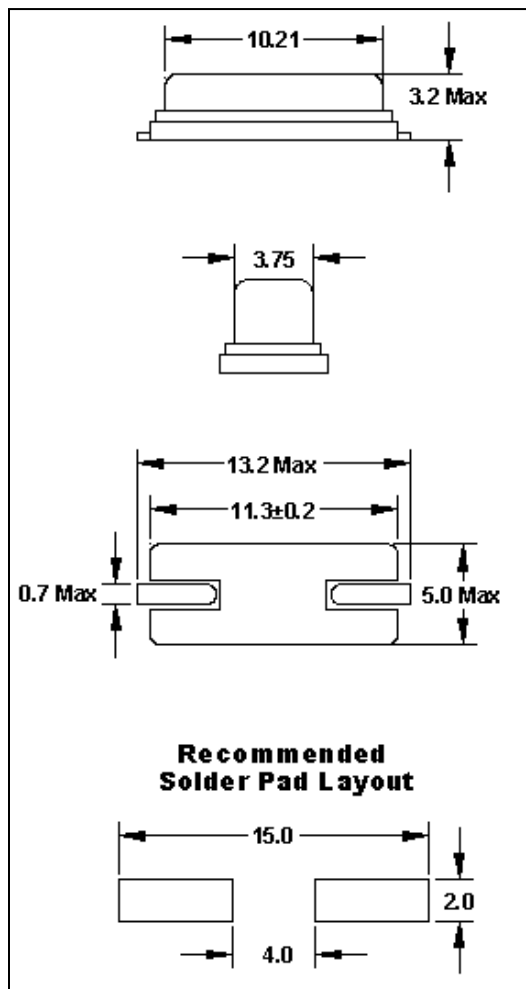

Note: Dimensional drawing is for reference to critical specifications defined by size measurements. Certain non-critical visual attributes, such as side castellations, etc. may vary.

• Available Operating Temperatures and Stabilities*

Operating Temperature	±5 PPM	±10 PPM	±15 PPM	±20 PPM	±25 PPM	±30 PPM	±50 PPM
-10°C to +60°C	O	O	O	O	O	O	O
-20°C to +70°C	X	O	O	O	O	O	O
-40°C to +85°C	X	X	O	O	O	O	O
-40°C to +105°C	X	X	X	X	X	X	O

Key: O=Available, X=Not Available,

*Does not imply a stocked part.

 © Copyright 2017 Fox Electronics, All rights reserved	Title / Description: C9SD STANDARD SPECIFICATIONS					
	Drawing Number: 101158			Size: A		
	Part Number:			Cage: 61429		
	Draftsperson: CMR		Approved: RB		Revision Date: 04/28/2017	



Resistance Weld SMD Crystal

C9SD
(former HC49SSDLF)
DATASHEET

• TAPE SPECIFICATIONS (millimeters)							• REEL SPECIFICATIONS (millimeters)						
A	B	C	D	E	F	Reel QTY	G	H	I	J	K	L	M
Ø1.5	4.0	12.0	11.5	24.0	3.5	1,000	2.0	Ø13	Ø21	Ø80	Ø330	25.5	2.0

Direction of Pull →

Page 2 of 2

Available Options & Part Identification for SMD Crystal C9SD*

F C9SD C B M F 10.0

F	C9SD	C	B	M	F	10.0
FOX	Model Number	Tolerance B=50ppm C=30ppm D=25ppm E=20ppm F=15ppm H=10ppm	Stability B=50ppm C=30ppm D=25ppm E=20ppm F=15ppm H=10ppm L=5ppm	Load Capacitance A=Series E=10pF G=12pF K=16pF L=18pF M=20pF Q=30pF	Operating Temperature D=-10 to +60C F=-20 to +70C M=-40 to +85C P=-40 to +105C	Frequency (MHz)

*Not all frequency, tolerance, stability, load, and operating temperature combinations may be available.



Corporate Headquarters
5570 Enterprise Parkway
Fort Myers, FL 33905
<http://www.FOXONLINE.com>

Sales
1-888-GET-2-FOX (1-888-438-2369)
or
1-239-693-0099
<http://www.FOXONLINE.com/repdisty>

Tech Support
<http://www.FOXONLINE.com/email>

PRODUCT USE: Fox Electronics reserves the right to modify the products and/or specifications described herein at any time and at Fox Electronics' sole discretion. All information in this document, including descriptions of product features and performance, is subject to change without notice. Performance specifications and the operating parameters of the described products are determined in the independent state and are not guaranteed to perform the same way when installed in customer products. The information contained herein is provided without representation or warranty of any kind, whether express or implied, including, but not limited to, the suitability of Fox Electronics' products for any particular purpose, an implied warranty of merchantability, or non-infringement of the intellectual property rights of others. This document is presented only as a guide and does not convey any license under intellectual property rights of Fox Electronics or any third parties.

Fox Electronics' products are not intended for use in applications involving extreme environmental conditions or in life support systems or similar devices where the failure or malfunction of a Fox Electronics product can be reasonably expected to significantly affect the health or safety of users. Anyone using a Fox Electronics product in such a manner does so at their own risk, absent an express, written agreement by Fox Electronics.

Fox Electronics and the Fox logo are registered trademarks of Fox Electronics. Product specification is subject to change without notice. Other trademarks and service marks used herein, including protected names, logos and designs, are the property of Fox Electronics or their respective third party owners.

For datasheet type definitions and a glossary of common terms, visit <http://www.foxonline.com/tgcrystals.html>.

 © Copyright 2017 Fox Electronics, All rights reserved	Title / Description: C9SD STANDARD SPECIFICATIONS		
	Drawing Number: 101158		Size: A
	Part Number:		Cage: 61429
	Draftsperson: CMR	Approved: RB	Revision Date: 04/28/2017